



HEYbrid™ Stainless Steel/Co-molded Liquid Tight Cordgrips

Metric Hubs


Don't get SKU'ed: More Cable Range, Fewer SKU's!

The Ultimate in Liquid Tight Strain Relief Protection




ALL NEW PRODUCTS!

- HEYCo-molded gripping finger/gland technology accommodates the **widest cable range** over the **fewest sku's**.
- Rolled threads **prevent galling** and allow for multiple assemblies and disassemblies.
- Self-retaining sealing rings eliminate the need for an O-Ring groove, thus **reducing cost**.
- Ideal for corrosive environments.
- Constructed from corrosion resistant 303 stainless steel.
- Resistant to salt water, acids and most chemicals.

CABLE DIA. RANGE				PART NO.	DESCRIPTION	UL or RA	PART DIMENSIONS									
Minimum		Maximum					Black	A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thickness		E Wrenching Nut Flat Size
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	
.065	1,7	.210	5,3	M6060	RSSCG M12	RA	.473	12,0	1.16	29,5	.32	8,1	.20	5,1	.75	19,0
.115	2,9	.250	6,4	M6061	SSCG M12											
.065	1,7	.230	5,8	M6062	RSSCG M16	RA	.630	16,0	1.25	31,8	.32	8,1	.20	5,1	.83	21,1
.105	2,7	.315	8,0	M6063	SSCG M16											
.095	2,4	.290	7,4	M6066	RSSCG M20	UL	.787	20,0	1.49	37,8	.41	10,4	.20	5,1	1.06	27,0
.170	4,3	.450	11,4	M6067	SSCG M20											
.180	4,6	.400	10,2	M6068	RSSCG LL M20	UL	.787	20,0	1.65	41,9	.41	10,4	.20	5,1	1.25	31,2
.260	6,6	.545	13,8	M6069	SSCG LL M20											
.250	6,4	.490	12,4	M6070	RSSCG M25	UL	.985	25,0	1.89	48,0	.52	13,2	.20	5,1	1.31	33,3
.435	11,1	.705	17,9	M6071	SSCG M25											
.490	12,4	.785	19,9	M6072	RSSCG M32	UL	1.260	32,0	2.23	56,6	.58	14,7	.20	5,1	1.75	44,4
.590	15,0	1.000	25,4	M6073	SSCG M32											

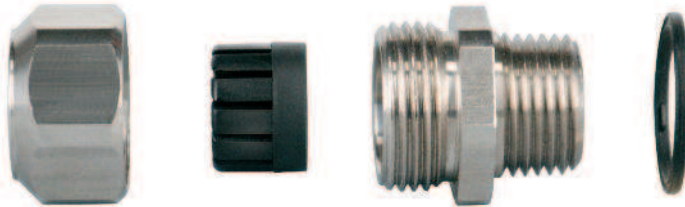

The HEYCo-molded Finger, Gland and Seat

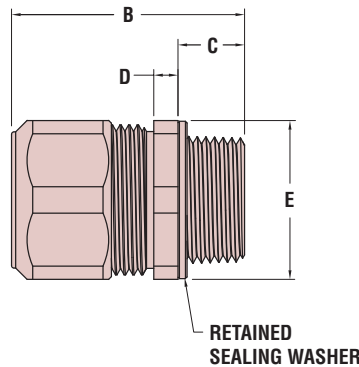

SUGGESTED CLEARANCE HOLE FOR NONTHEADED MOUNTING

Quick Specs

Material	303 Stainless Steel Body and sealing nut with nylon 6/6 and TPE co-molded finger/gland assembly SBR Sealing Washer
Certifications	cULus Listed under Underwriters' Laboratories File E51579 cRAus Recognized under Underwriters' Laboratories File E51579
Flammability Rating	94V-2
Temperature Rating	-.4°F (-20°C) to 212°F (100°C)
IP Rating	IP68 (70 PSI, 5 BAR)