




Heyco® RDD Lockit™ Strain Relief Bushings – Straight-Thru

Snap onto **Round Cables** for Faster Assembly into **Double D Mounting Holes** - *Semi-Automatic Equipment Available*
Fit 3/4" Electrical Knock-out Hole


- **Assembly friendly!** Independent of insertion into the panel, RDD Lockit™ Strain Reliefs **self-lock** onto the cable. Preassemble RDD Lockits off line for final assembly at a later time or remote location, for lower installed cost!
- Install easily with fingertip pressure into a standard round or Double D hole. No tools required, even for hand assembly.
- Protect the lifeline of your electric/electronic products by absorbing the forces of push and pull that may be exerted on the flexible power cord. Double D design eliminates the possibility of part rotation under forces of twist.
- Multiple panel locking steps secure Lockit Strain Reliefs into a wide range of panel thicknesses for a **flush, finished fit.**
- Heyco's automated Pre-Assembly Equipment speeds assembly of the RDD onto the cable and thus lowers costs while greatly reducing risk of carpal tunnel syndrome. See pages 4-15 & 4-16.
- Consult Heyco for other wire types and sizes.
- See page 4-38 for corresponding **Mounting Hole Plugs** which can be used to fill blank/unused Mounting Holes and thus allow for a single panel design for multiple applications.

WILL FIT THESE CABLES			PANEL DIMENSIONS				RDD LOCKIT STRAIN RELIEF for Faster Assembly			Corresponding Mounting Hole Plug		
UL Type	AWG/Conductors	Approximate Size		Mounting Hole Size		Thickness		PART NO.	DESC.	PART NO.	DESC.	
		in.	mm.	in.	mm.	in.	mm.	Black	White			
See table on page 4-10	various	.525-.600	13,5-15,2	1.109 w/ 1.006 flats	28,2 w/ 25,4 flats	.063	1,6	1868	1869	RDD 501	2717	DD 1109-1000
						.099	2,5					
						.126	3,2					
						.157	4,0					
						.187	4,8					
See table on page 4-10	various	.600-.700	15,2-17,8	1.109 w/ 1.006 flats	28,2 w/ 25,4 flats	.063	1,6	1802	1803	RDD 601	2717	DD 1109-1000
						.099	2,5					
						.126	3,2					
						.157	4,0					
						.187	4,8					

Standard color black. Consult Heyco for white and other colors.

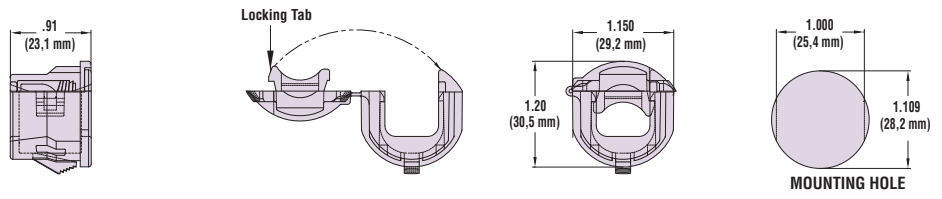

RDD 501

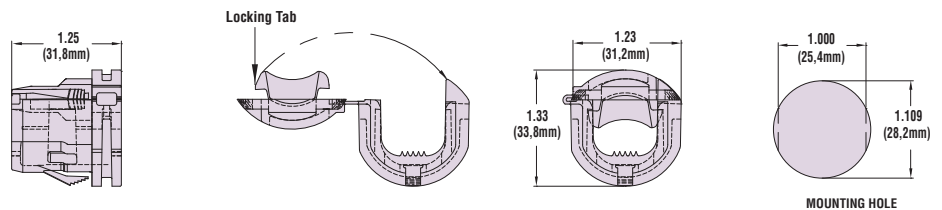

RDD 601

Quick Specs

Material
Certifications

Nylon 6/6

Recognized under UL File E15331

Certified by the Canadian Standards Association File 8919

Flammability Rating

94V-2

Material Temperature Index

257°F (125°C)–Maximum temperature on part not to exceed 221°F (105°C)