




Heyco® RDD Lockit™ Strain Relief Bushings – Right Angle

Snap onto **Flat Cables** for Faster Assembly into **Double D Mounting Holes** - *Semi-Automatic Equipment Available*




UL Type	WILL FIT THESE CABLES		PANEL DIMENSIONS				RDD LOCKIT STRAIN RELIEF for Faster Assembly				Corresponding Mounting Hole Plug	
	AWG/ Conductors	Approximate Size in. mm.	Mounting Hole Size in. mm.		Thickness in. mm.		Black	White	DESC.	PART NO.	DESC.	
SPT-1	18/2	.105 x .222	2,7 x 5,6	.625 w/ .500 flats	15,9 w/ 14,0 flats	.032	0,8	1806	1807	RDD 100A-90	2497	DD 625-550
	18/3	.116 x .315	2,9 x 8,0			.040	1,1					
SPT-2, HPN	18/2	.116 x .315	2,9 x 8,0	.625 w/ .500 flats	15,9 w/ 14,0 flats	.032	0,8	1808	1809	RDD 100-90	2497	DD 625-550
	18/3	.160 x .300	4,1 x 7,6			.040	1,1					
HPN	18/3	.15 x .34	3,8 x 8,6									
	16/3	.16 x .37	4,1 x 9,4									
SPT-2	18/3	.15 x .40	3,8 x 10,2	.875 w/ .770 flats	22,2 w/ 19,6 flats	.032	0,8	1810	1811	RDD 200-90	2509	DD 875-770
	16/3	.16 x .41	4,1 x 10,4			.063	1,6					
SPT-3	18/2	.19 x .35	4,8 x 8,9									
	18/3	.19 x .39	4,8 x 9,9									
	16/2	.20 x .37	5,1 x 9,4									
	16/3	.20 x .43	5,1 x 10,9									
	14/2	.24 x .42	6,1 x 10,7									

Standard color black. Consult Heyco for white and other colors.

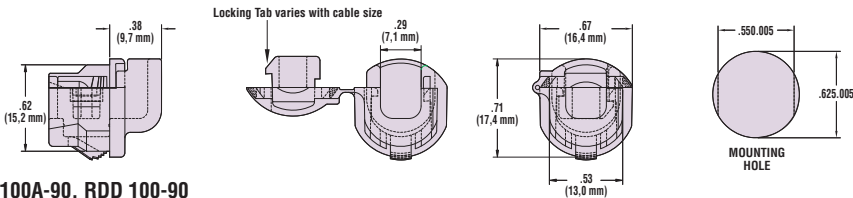

RDD 100A-90, RDD 100-90

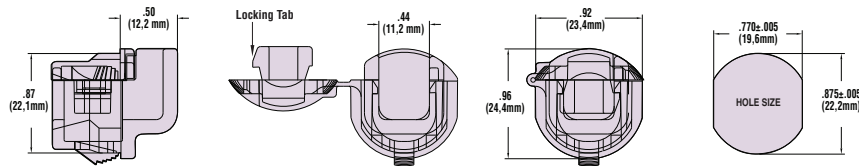

RDD 200-90

- **Right Angle design eases the cable into the bend**, prevents kinking and assures longest cable and product life.
- Assembly friendly! Independent of insertion into the panel, RDD Lockit™ Strain Reliefs self-lock onto the cable. Preassemble RDD Lockits off line for final assembly at a later time or remote location, for lower installed cost!
- Install easily with fingertip pressure into a standard round or Double D hole. No tools required, even for hand assembly.
- Protect the lifeline of your electric/electronic products by absorbing the forces of push and pull that may be exerted on the flexible power cord. Double D design eliminates the possibility of part rotation under forces of twist.
- Multiple panel locking steps secure Lockit Strain Reliefs into a wide range of panel thicknesses for a **flush, finished fit**.
- Heyco’s automated Pre-Assembly Equipment speeds assembly of the RDD onto the cable and thus lowers costs while greatly reducing risk of carpal tunnel syndrome. See pages 4-15 & 4-16.
- Consult Heyco for other wire types and sizes.
- See page 4-38 for corresponding **Mounting Hole Plugs** which can be used to fill blank/unused Mounting Holes and thus allow for a single panel design for multiple applications.

Material Nylon 6/6
Certifications Recognized under the Component Program of Underwriters’ Laboratories File E15331
 Certified by the Canadian Standards Association File 8919
Flammability Rating 94V-2
Material Temperature Index 257° (125°C)–Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs