



ALL NEW PRODUCTS!



Heyco® Threaded Vent Plugs

Open vent holes only

| THREAD Type/Size | PART NO. | | DESCRIPTION | PART DIMENSIONS | | | |
|---------------------|----------|------|-------------|---------------------------------|------|--------------------------------|------|
| | Black | Gray | | A Wrenching Flats in. mm. | | B Overall Length in. mm. | |
| NPT | | | | | | | |
| NPT 1/4 | 3551B | 3551 | TVP NPT 1/4 | .63 | 16,0 | .66 | 16,8 |
| NPT 3/8 | 3552B | 3552 | TVP NPT 3/8 | .83 | 21,0 | .69 | 17,5 |
| NPT 1/2 | 3553B | 3553 | TVP NPT 1/2 | .98 | 24,9 | .81 | 20,6 |
| NPT 3/4 | 3554B | 3554 | TVP NPT 3/4 | 1.29 | 32,8 | .86 | 21,8 |

PG - for PG Thread specifications, see page 3-37 in Heyco's Catalog 113


| | | | | | | | |
|---------|-------|------|-------------|------|------|-----|------|
| Pg 7 | 3566B | 3566 | TVP Pg 7 | .63 | 16,0 | .53 | 13,5 |
| Pg 9 | 3567B | 3567 | TVP Pg 9 | .83 | 21,0 | | |
| Pg 13.5 | 3568B | 3568 | TVP Pg 13.5 | .98 | 24,9 | .62 | 15,8 |
| Pg 21 | 3569B | 3569 | TVP Pg 21 | 1.29 | 32,8 | .76 | 19,3 |

Metric

| | | | | | | | |
|-----|-------|------|---------|-----|------|-----|------|
| M12 | 3557B | 3557 | TVP M12 | .63 | 16,0 | .53 | 13,5 |
| M16 | 3558B | 3558 | TVP M16 | .83 | 21,0 | | |
| M20 | 3559B | 3559 | TVP M20 | .98 | 24,9 | .62 | 15,8 |

Standard color Black. Consult Heyco for other colors.

- Permit the passage of air for ventilation and heat dissipation.
- Quick and easy installation into Threaded Holes.
- For multiple thread sizes and types.
- All sizes and types feature seven (7) .094" (2,4 mm) diameter vent holes.
- Threaded plugs for hydraulic and pneumatic applications.
- Lower cost option over brass or steel plugs.
- Non-corrosive-resist salt water, weak acids, gasoline, alcohol, oil, grease and common solvents. Resist oil and heat up to 221°F (105°C).
- Approximate Head Thickness: .21" (5,3 mm). Thickness may vary.
- Hex shaped head for wrench installation.
- Electrically non-conductive Nylon 6/6.
- For **Liquid Tight** Threaded Vent Plugs, see page 6-11.

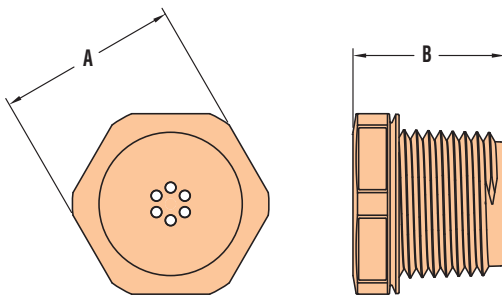

| | |
|---------------------|--------------------------------------|
| Material | Nylon 6/6 bodies with UL (f1) rating |
| Flammability Rating | 94V-2 |
| Temperature Rating | -40°F (-40°C) to 221°F (105°C) |

Quick Specs