




Heyco® Extra Dome Plugs

Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS					
in.	mm.	Black	White		A Head Diameter		B Overall Height		C Inside Height	
					in.	mm.	in.	mm.	in.	mm.
3.0	76,2	2442	2443	EDP 3.0	3.22	81,8	1.37	34,8	1.26	32,0
5.0	127,0	2444	2445	EDP 5.0	5.22	132,6	1.41	35,8	1.31	33,3

Standard colors black. Consult Heyco for other colors.

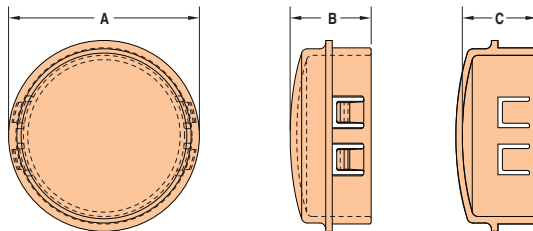

- **Extra dome height** for additional clearance under the top.
- Consult Heyco for additional sizes.
- Lock firmly into panels up to .250" (6,4 mm) thick.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Not UL Recognized.




Heyco® Snap-In Metric Dome Plugs

Multiple Locking Steps for Panel Thickness up to 2,5 mm (.098")
Mounting Hole Diameter Range: 16,0 mm (.630") to 32,0 mm (1.260")

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS			
mm.	in.	Black	White		A Head Diameter		B Overall Height	
					mm.	in.	mm.	in.
16,0	.630	2128	2130	MDP 16	18,5	.728	10,3	.406
20,0	.787	2131	2132	MDP 20	22,6	.890		
25,0	.984	2133	2134	MDP 25	29,8	1.173	11,5	.453
32,0	1.260	2135	2136	MDP 32	35,3	1.388		

Standard color black. Consult Heyco for other colors.



- Multiple sizes for use in **16,0 mm (.630") to 32,0 mm (1.260") diameter holes**. For other metric sizes, consult Heyco.
- Close unneeded panel holes.
- Quick and easy installation.
- Convex, matte finish head tapers to a thin edge.
- Lock firmly into panel up to 4,1 mm (.162") thick.
- Approximate Head Thickness: 1,6 mm (.062").
- For **Threaded Metric Plugs**, see page 6-26.
- For our complete range of Dome Plugs, see page 6-1.

Material Certifications

Nylon 6/6
 Recognized under the Component Program of Underwriters' Laboratories, File E51579 (MDP's only)
 Certified by Canadian Standards Association, File 8919 (MDP's only)

Flammability Rating
Temperature Rating

94V-2
-40°F (-40°C) to 221°F (105°C)

Quick Specs