



Heyco® Not All Plugs are Round

- **Fill uniquely sized panel holes.**
- Locking fingers in fractional increments up to the maximum panel thickness.
- Consult Heyco for other sizes. Our Axcell Rapid Response team is ready to meet your design requirements.
- **PN 1890** - UR Recognized under the Component Program of Underwriters' Laboratories File E15331.
- **PN 1892** - UR Recognized under the Component Program of Underwriters' Laboratories File E51579 and CSA Certified by the Canadian Standards Association File 8919.

Maximum Thickness in. mm.	PANEL DIMENSIONS Mounting Hole				PART NO.	DESCRIPTION	PART DIMENSIONS			
	C Length		D Width				A Head Dimensions		B Overall Height	
in. mm.	in. mm.	in. mm.	in. mm.	in. mm.	Black		in. mm.	in. mm.	in. mm.	
.040 1,0	.290 7,4	.270 6,9			2512	RP 69-74*	.37 x .37 9,4 x 9,4	.330 8,4		
.099 2,5	.453 11,5	.512 13,9			1890	RP 115-130	.58 x .58 14,7 x 14,7	.403 10,2		
.157 4,0	.690 17,5	.690 17,5			1892	RP 175-175	.83 x .83 21,1 x 21,1	.470 11,9		
.125 3,2	1.350 34,3	1.350 34,3			2546	RP 343-343-R**	2.31 dia. 58,7 dia.	.600 15,2		
	1.650 41,9	.940 23,9			2513	RP 239-419	1.38 x 2.17 35,1 x 55,1	.460 11,7		


*Your Strange, Beautiful Plug here****

Standard color black. Consult Heyco for other colors.

* Single locking step for Panel Thickness up to .040" (1,0 mm).

** Round Head and single thickness panel design.

*** Consult Heyco. Our Axcell Rapid Response Team is ready to meet your design requirements.

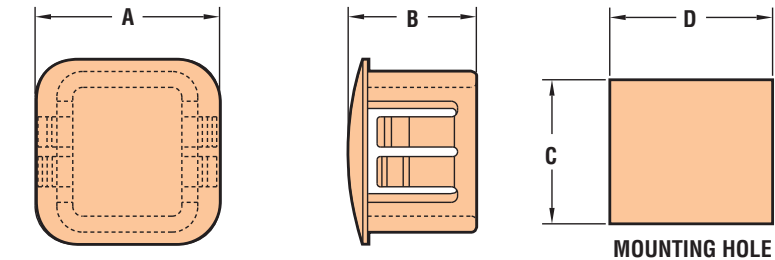

MOUNTING HOLE

2546

*Quick
Specs*

Material Nylon 6/6
 Flammability Rating 94V-2
 Temperature Rating -40°F (-40°C) to 221°F (105°C)