




Heyco® Shorty Window Plugs

Single Locking Step for Panel Thickness up to .062" (1,6 mm)
Mounting Hole Diameter Range: .510" (13,0 mm) to 1.010" (25,7 mm)

| MOUNTING HOLE DIAMETER | | PART NO. Clear* | DESCRIPTION | PART DIMENSIONS | | | |
|------------------------|------|--------------------|------------------------------|---------------------------|------|----------------------------|-----|
| in. | mm. | | | A Head Diameter in. | mm. | B Overall Height in. | mm. |
| .510 | 13,0 | 1292 | SWP 500 | .563 | 14,3 | .250 | 6,4 |
| .635 | 16,1 | 1293 | SWP 625 | .734 | 18,6 | | |
| .760 | 19,3 | 1294 | SWP 750 | .859 | 21,8 | | |
| .885 | 22,5 | 1295 1295AA | SWP 875 SWP 875 Infrared* | .953 | 24,2 | | |
| 1.010 | 25,7 | 1296 | SWP 1000 | 1.125 | 28,6 | | |

*Consult Heyco for Shorty Window Plugs in tinted colors.

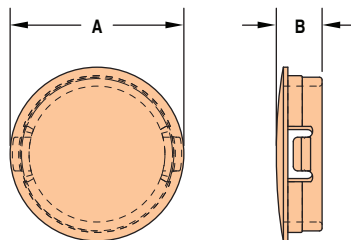


- Lock firmly into panels up to .062" (1,6 mm) thick, with **limited intrusion** inside the panel.
- Molded of transparent polycarbonate for internal viewing or light transmission.
- Snap into mounting holes with fingertip pressure—no tools required.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Multiple sizes for use in .510" (13,0 mm) to 1.010" (25,7 mm) diameter holes.
- Flammability Rating 94V-2.
- **Available in a variety of tints—consult Heyco.**

Heyco® Oval Window Plug

Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)

| MOUNTING HOLE DIAMETER | | PART NO. Clear* | DESCRIPTION | PART DIMENSIONS | | | |
|------------------------|-----|--------------------|--------------|----------------------|-------------|-----------------------|------|
| in. | mm. | | | Head Diameter in. | mm. | Overall Height in. | mm. |
| see schematic | | 1299 | OWP 875-2000 | 2.13 - 1.01 | 54,4 - 26,6 | .46 | 11,7 |

*Consult Heyco for Oval Window Plugs in tinted colors.

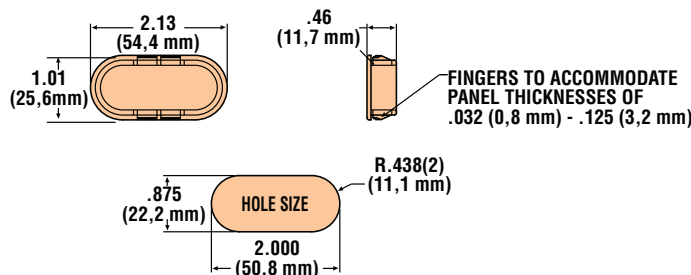

- **Large viewing window** for internal components.
- Locking fingers in fractional increments up to the maximum panel thickness.

Consult Heyco for Window Tints Other Than Clear

| | |
|---------------------|--------------------------------|
| Material | Polycarbonate |
| Flammability Rating | 94V-2 |
| Temperature Rating | -40°F (-40°C) to 239°F (115°C) |

Quick Specs