



## Heyco® Hose and Cable Wrap-Polyethylene

### Standard

- Easy to use: Just twist on wire!
- Allows breakouts of single/multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables and hose, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .13" (3,2 mm) to 7.00" (177,8 mm) diameters.
- Conforms to: Fed Spec LP390, Mil I-631D, Mil P-21922B
- For hose and cable **clamps** see pages 1 thru 4.

BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter		UV Black	Natural		A Outside Diameter		B Pitch		C Thickness	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	
.13	3,2	1.50	38,1	<b>8904</b>	<b>8905</b>	CW 187 PE*	.19	4,8	.25	6,3	.03	0,8
.19	4,8	2.00	50,8	<b>8908</b>	<b>8909</b>	CW 250 PE	.25	6,3	.38	9,5	.05	1,1
.31	7,9	3.00	76,2	<b>8912</b>	<b>8913</b>	CW 375 PE	.38	9,5	.44	11,1	.05	1,3
.38	9,5	4.00	101,6	<b>8916</b>	<b>8917</b>	CW 500 PE	.50	12,7	.50	12,7	.06	1,6
.50	12,7	4.50	114,3	<b>8920</b>	<b>8921</b>	CW 625 PE*	.63	15,9	.63	15,9	.06	1,6
		5.00	127,0	<b>8924</b>	<b>8925</b>	CW 750 PE	.75	19,1	.75	19,1	.07	1,7
1.00	25,4	7.00	177,8	<b>8928</b>	<b>8929</b>	CW 1000 PE	1.00	25,4	1.00	25,4	.08	2,0

Standard colors UV black or natural.

\* Parts are not UR recognized.




### Heavy Duty

- Designed to shield hydraulic, pneumatic, and high pressure hoses; cables and cable bundles.
- Available in a **variety of sizes** that fit cable, cable bundles and hoses from .75" (19,1 mm) to 6" (152,4 mm) in diameter.
- **Smooth finish interior** wall.
- May be **color coded** (see tabular chart).
- Packaged as one continuous piece, not spooled.
- May be **cut to desired length**, please consult Heyco.

BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS						
Minimum Diameter		Maximum Diameter		Black	Color Coded		A Outside Dia.		B Pitch		C Thickness		
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.		
.75	19,1	1.50	38,1	<b>8964</b>	<b>8965</b>	Red	CWG 99 PE	.93	23,6	.95	24,1	.12	3,0
1.00	25,4	2.00	50,8	<b>8966</b>	<b>8967</b>	Blue	CWG 126 PE	1.12	28,4	1.25	31,8	.13	3,3
1.25	31,8	2.50	63,5	<b>8968</b>	<b>8969</b>	Green	CWG 153 PE	1.37	34,8	1.35	34,3	.14	3,5
1.50	38,1	3.00	76,2	<b>8970</b>	<b>8971</b>	Yellow	CWG 181 PE	1.62	41,1	1.50	38,1	.15	3,9
2.00	50,8	3.50	88,9	<b>8972</b>	<b>8973</b>	Orange	CWG 234 PE	2.09	53,1	1.60	40,6	.17	4,3
3.50	88,9	6.00	152,4	<b>8974</b>	<b>8975</b>	Gray	CWG 401 PE	3.50	88,9	1.95	49,5	.25	6,4

\*Standard color black or color coded.

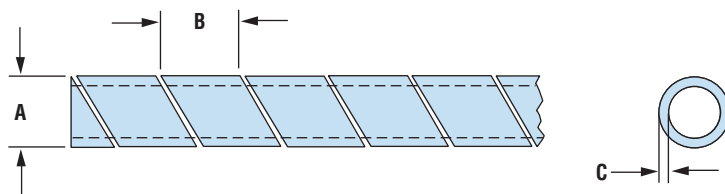

Quick Specs

Material Polyethylene (Standard), High Density Polyethylene (Heavy Duty)  
 Certifications Recognized under the Component Program of Underwriters' Laboratories File E173954. (Standard Only)  
 Temperature Range -76°F (-60°C) to 190°F (88°C) UL rated temp not to exceed 122°F (50°C) (Standard)  
 0°F (-18°C) to 165°F (74°C) (Heavy Duty)