




Heyco® Hose and Cable Wrap-Nylon

BUNDLE RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS					
Minimum Diameter		Maximum Diameter		UV Black	Natural		A Outside Diameter		B Pitch		C Thickness	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	
.13	3,2	1.50	38,1	8936	8937	CW 187 N*	.19	4,8	.25	6,3	.02	0,5
.19	4,8	2.00	50,8	8940	8941	CW 250 N	.25	6,3	.38	9,5	.03	0,6
.31	7,9	3.00	76,2	8944	8945	CW 375 N	.38	9,5	.44	11,1		
.38	9,5	4.00	101,6	8948	8949	CW 500 N	.50	12,7	.50	12,7	.04	0,9
.50	12,7	4.50	114,3	8952	8953	CW 625 N*	.63	15,9	.63	15,9	.03	0,8
		5.00	127,0	8956	8957	CW 750 N	.75	19,0	.75	19,1		
1.00	25,4	7.00	177,8	8960	8961	CW 1000 N	1.00	25,4	1.00	25,4		

Standard colors UV black or natural.

* Parts are not UL recognized.

- Easy to use: Just twist on wire!
- Allows breakouts of single/multiple wires and re-routing of replacement wires.
- Absorbs vibration, insulates cables, and resists abrasion.
- Multiple sizes bundle and protect cables, wires, tubing, and hoses from .13" (3,2 mm) to 7.00" (177,8 mm) diameters.
- Available in UV black or natural nylon color.
- Conforms to: ASTM D 4066, Group 2; Fed Spec LP410
- For hose and cable **clamps**, see pages 1 through 4.

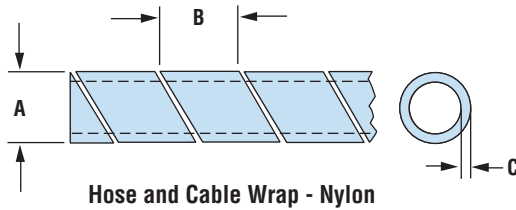

Material
Certifications

Nylon
 Recognized under the Component Program of Underwriters' Laboratories
 File E173954

Temperature Range -40°F (-40°C) to 250°F (121°C) – UL rated temp not to exceed 149°F (65°C)

*Quick
Specs*