




HEYClip™ Turn Fastener

- For use with combined panel thicknesses between .24" (6,0 mm) and .28" (7,0 mm).
- Part Description Key: TF X-YYY where XXX = Mounting Hole Diameter (inches) and YYY = minimum Panel Thickness (inches)

WILL FIT THESE PANELS PANEL THICKNESS				PART NO.	DESCRIPTION	PART DIMENSIONS					
Min.		Max.				A Length		B Head Height		C Head Length	
in.	mm.	in.	mm.	Black							
TF Series											
.24	6,0	.28	7,0	9087	TF 394-236	.44	11,1	.51	13,0	.59	15,0

Standard color black.

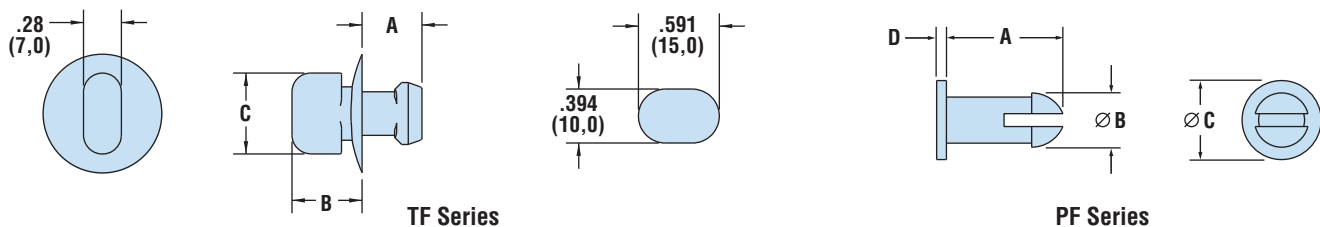

HEYClip™ Nylon Push-In Fasteners

PANEL THICKNESS		MOUNTING HOLE DIA.		PART NO.		DESCRIPTION	PART DIMENSIONS														
in.	mm.	in.	mm.	Natural	NEW! Black		A Length		B Clip Dia.		C Head Dia.		D Head Height								
														in.	mm.	in.	mm.	in.	mm.	in.	mm.

PF Series For combined Panel Thickness ≤ .250" (6,4 mm)

- **Slotted leg design** allows for both compression through the mounting hole and then expansion back to original shape—to lock assembled components securely.
- May be disassembled and reused.
- Offer a low cost way to assemble metal, plastic, composite, wood, and other thin gauge materials.
- Snap into mounting holes with fingertip pressure—no tools required.
- Vibration, abrasion, and corrosion resistant.

.07	1,7	.165	4,2	0351	0351B	PF 065-165	.20	5,1	.20	5,1	.34	8,7	.12	3,1	NEW!
.09	2,4	.093	2,4	0340	0340B	PF 093-093*	.17	4,3	.11	2,7	.28	7,1	.03	0,7	NEW!
.10	2,5	.245	6,2	0384	0384B	PF 098-245	.27	6,8	.28	7,1	.50	12,7	.06	1,4	NEW!
.12	2,9	.125	3,2	0339	0339B	PF 115-125	.20	5,1	.15	3,7	.25	6,4	.04	1,0	NEW!
.12	3,1	.089	2,3	0341	0341B	PF 121-089*	.21	5,3	.15	3,7	.31	7,9	.04	1,0	NEW!
		.115	2,9	0347	0347B	PF 121-115	.25	6,2	.14	3,6	.20	5,2	.04	1,0	NEW!
		.200	5,1	0358	0358B	PF 121-200	.27	6,9	.24	6,1	.47	11,9	.05	1,3	NEW!
.13	3,4	.175	4,4	0350	0350B	PF 133-175	.27	6,9	.20	5,1	.34	8,7	.04	1,0	NEW!
		.115	2,9	0343	0343B	PF 156-115	.29	7,4	.14	3,6	.20	5,2	.04	1,0	NEW!
.16	4,0	.210	5,3	0360	0360B	PF 156-210	.31	7,8	.23	5,8	.47	11,9	.05	1,3	NEW!
		.260	6,6	0370	0370B	PF 171-260	.36	9,1	.30	7,5	.59	15,1	.06	1,5	NEW!
.19	4,8	.155	3,9	0342	0342B	PF 190-155	.28	7,1	.18	4,6	.20	5,2	.04	1,0	NEW!
.24	6,0	.200	5,1	0352	0352B	PF 237-200	.39	9,8	.24	6,0	.47	11,9	.05	1,3	NEW!
		.200	5,1	0353	0353B	PF 250-200	.42	10,8	.22	5,7	.34	8,7	.06	1,5	NEW!
.25	6,4	.218	5,5	0362	0362B	PF 250-218	.36	9,1	.28	7,2	.41	10,3	.05	1,1	NEW!
		.240	6,1	0371	0371B	PF 250-240	.43	10,9	.30	7,5	.59	15,1	.06	1,5	NEW!

Standard color natural. Consult Heyco for black and other colors.

*No slot

Quick Specs

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	-4°F (-18°C) to 185°F (85°C) - TF Series 32°F (0°C) to 185°F (85°C) - PF Series