




# Heyco® Heavy Duty Ring and Spade Terminals

For Heyco Applicators, see page 8-57



- **Three up** and **two up** applicators allow operators to attach multiple terminals at once.
- .0315” and .040” gauge material.
- Available in strip form only.
- HD Spade features **90° bend** to lock screw in place.

Insulation Crimp?	PART DATA			PART NO.	APPLICATION TOOLING *				
	Hole Dia. in.	AWG Range	Material		Die **	Feed	Parts per Feed	Crimp Punch	Anvil
<b>Heavy Duty Ring Terminals</b>									
No	.265	12-8	Brass	<b>6072</b>	6072SXX5	Rear	3	0W29,	0W28,
				<b>6073</b>	6073SXX5	Rear	2	0W46,	0W45,
No	.265	8-6	Brass	<b>6070</b>	6070SXX5	Rear	3	0W29,	0W28
				<b>6071</b>	6071SXX5	Rear	2	0W49,	
<b>Heavy Duty Spade Terminals</b>									
No	.265	12-8	Brass	<b>6082</b>	6082SXX5	Rear	3	0W29,	0W28,
				<b>6083</b>	6083SXX5	Rear	2	0W46,	0W45,
No	.265	8-6	Brass	<b>6080</b>	6080SXX5	Rear	3	0W29,	0W28
				<b>6081</b>	6081SXX5	Rear	2	0W49,	


\* Use the Heyco Standard Applicator Die (indicated by “S” in the Die Part No.), page 8-57.  
 \*\* “XX” represents Wire Gauge. Please specify Wire Gauge when ordering.

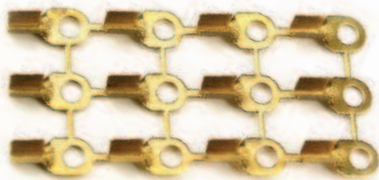

HD Ring

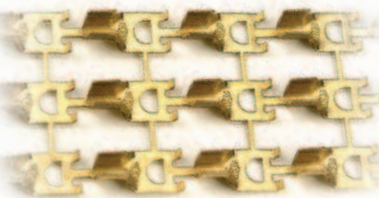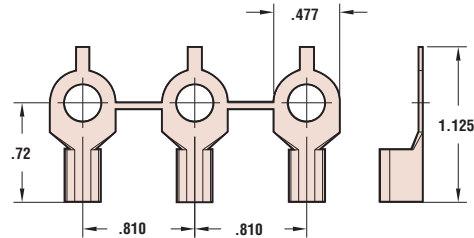

HD Spade

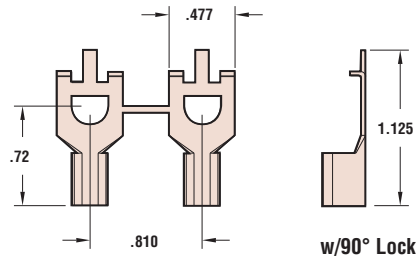

Quick Specs

Material  
Certifications

Alloy 260 Brass (70% Cu, 30% Zn. Higher Cu content resists dezincification)  
 (UL) Listed under Underwriters' Laboratories File E95474