



Heyco® Turn-2-Lock Cordset Contacts

For Finished, Custom Turn-2-Lock Cord and Plug Sets, see section 9

20 Amp


PART DATA			PART NO.	APPLICATION TOOLING*				
Type	AWG Range	Material		Die**	Feeds	Tool Packs	Crimp Punch	Anvil
Male - for snap together Male Nylon Premold Bridges see page 8-20								
TL-L5-20-B	18-14	Brass	6156	6156UXX5	Bulk	B958/B959	C663	C667
TL-L5-20-W	18-14	Brass	6154	6154UXX5				
TL-L20-G	18-14	Brass	6158	6158UXX5				
TL-L5-20-W†	16-10	Brass	6114	6114UXX5				
		Tin-PI	6115	6115UXX5				
TL-L5-20-B†	16-10	Brass	6116	6116UXX5				
		Tin-PI	6117	6117UXX5				
TL-L5-20-G	16-10	Brass	6118	6118UXX5				
		Tin-PI	6119	6119UXX5				
TL-L7-20-G	18-14	Brass	6162	6162UXX5				
	16-10	Brass	6132	6132UXX5				
TL-L24-20-G	18-14	Brass	6168	6168UXX5				
	16-10	Brass	6138	6138UXX5				
Female - for snap together Female Nylon Premold Shells see page 8-20								
TLR-L5-20	16-10	Brass	7552	7552UXX5	Left to Right	B972L/B973	C784	C783

* Use the Heyco Universal Applicator Die (indicated by "U" in the Die Part No.), page 8-57.

** "XX" represents Wire Gauge. Please specify Wire Gauge when ordering.

† Can be used for L7 and L24 configurations.

- **Easy loading for increased molding efficiency.**
- Use inexpensive Heyco load pins (consult Heyco for details on our complete line of blades and pins).
- **Reduce PVC usage** and allow more cavities per mold.
- All Ground blades feature 90° leg for **twist-locking mechanism.**
- .056" gauge material, cut-out shapes and radius are all UL Specified.

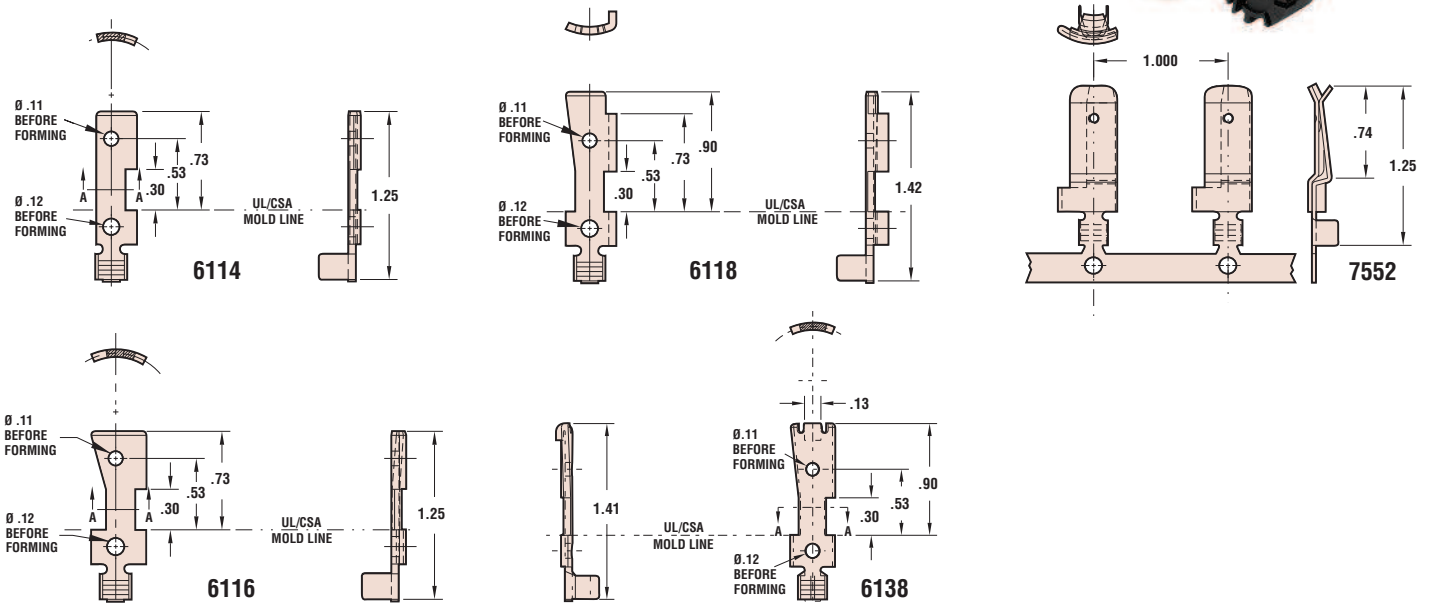

Materials Alloy 260 Brass (70% Cu, 30% Zn. Higher Cu content resists dezincification)
Tin-PI = Brass, Tin plated before or after stamping
6/6 Nylon

Certifications Listed under UL File E217650 for use with Cordsets under UL 817 applications

Quick Specs