




Heyco® Preassembled Cordset Components

For Heyco Application Equipment, see pages 8-57 and 8-58

Male Padded Bridge–NEMA 5-15P

ALL NEW PRODUCTS!

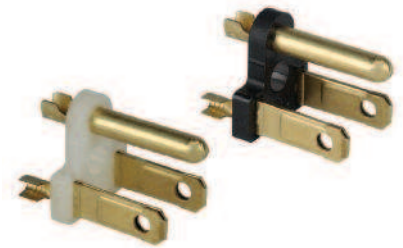


PART DATA			PART NO.	APPLICATION TOOLING*			CRIMP DIMENSIONS		
Type	Color	AWG Range		Die	Feeds	Crimp Punch	Anvil	A in.	B in.
5-15P Male Padded Bridge	Black	18-14	S7568	Z294	Semi-Auto*	Z318, Z291	Z290	.26	.40
	Natural	18-14	S7569						

*Semi-Automatic Terminating Equipment is available, see page 8-58.

- Heyco Padded Blades are **far less expensive** than their Full Thickness counterparts (pages 8-27 thru 8-30), yet they are functionally equivalent.
- Thinner gauge material lowers cost, yet full pad configuration meets UL power cord requirements, including **UL 1659**.
- Heyco Padded Blades utilize less brass but retain all of the strength of our Full Thickness Blades, at a **lower cost**.
- Our Padded Bridge design **accommodates existing overmolds** designed for Padded Blades.
- Automated terminating equipment is available, see page 8-58.
- See page 8-58 for wire stripper information.

S7568

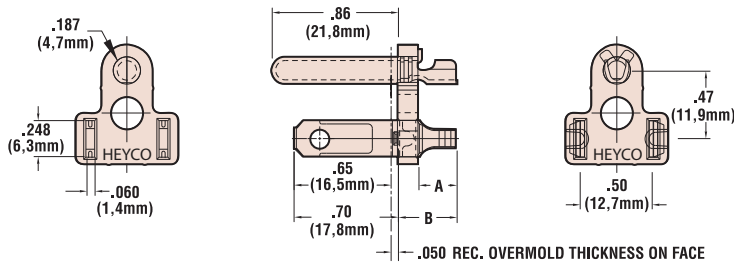

Materials	Alloy 260 Brass (70% Cu, 30% Zn. Higher Cu content resists dezincification) Nylon 6/6
Certifications	UL Recognized Component under UL File E164169 (Component Blades only) CSA Certified by the Canadian Standards Association File 91824
Standards	NEMA 5-15P

Quick Specs