



Now Available
in Single Reel
Order Quantities!



Heyco® Female Pin Connectors

Round Barrel

For mating Male Pins, see pages 8-43 & 8-44
For Female Ground Pins, see pages 8-39 & 8-42

TVR Series

- .56" (14,2 mm) Overall Length.
- .31" (7,9 mm) Round Barrel Length.
- Wide inside diameter range: from .077" (2,0 mm) to .151" (3,8 mm).
- 1/4" (6,4 mm) spacing between connectors for quick, easy attachment.
- Conductor crimp ears only.
- Available only in continuous strip form, regular (left to right) wind.

SC Series

- .63" (16,0 mm) Overall Length.
- .28" (7,1 mm) Round Barrel Length.
- 1/4" (6,4 mm) spacing between connectors for quick, easy attachment.
- Conductor crimp ears only.
- Available only in continuous strip form, regular (left to right) wind.
- SC Series not CSA certified

1200 Series

- .56" (14,2 mm) Overall Length.
- D-Shape Barrel with "trap door".
- .109" (2,8 mm) mating Pin diameter for all Part Nos. in Series 1200.
- Mold with D-Shape load pin.
- 1/4" (6,4 mm) spacing between connectors for quick, easy attachment.
- Conductor crimp ears only.
- Available only in continuous strip form, regular (left to right) wind.
- 1200 Series not CSA certified.

Inside Dia. in.	PART DATA		PART NO.	Die**	APPLICATION TOOLING*			
	AWG Range	Material			Feeds	Tool Packs	Crimp Punch	Anvil

TVR Series - .560" Overall Length

.077	14-18	Brass	7333 †	7333UXX5	Left to Right	B502L/B503L	C180	C181
.089	14-18	Brass	7319	7319UXX5				
.091, .122	14-18	Brass Tin-PI	7301	7301UXX5				
			7298 †	7298UXX5				
.091	14-18	Brass Tin-PI	7300	7300UXX5				
			7299 †	7299UXX5				
.093	14-18	Brass	7335	7335UXX5				
.105	14-18	Brass Tin-PI	7304	7304UXX5				
			7311 †	7311UXX5				
.107	14-18	Brass	7305 †	7305UXX5				
			7308	7308UXX5				
.111	14-18	Brass	7307	7307UXX5				
			7315	7315UXX5				
.122	14-18	Brass	7318	7318UXX5				
			7302	7302UXX5				
.131	14-18	Brass	7318	7318UXX5				
			7302	7302UXX5				
.138	14-18	Brass	7318	7318UXX5				
			7302	7302UXX5				
.138, .091	14-18	Brass	7302	7302UXX5				
			7302	7302UXX5				
.151	14-18	Brass	7303	7303UXX5				


SC Series - .630" Overall Length†

.077	26-22	Tin-PI	7668	7668UXX5	Left to Right	B530L/B531L	C449	C450
.091	26-22	Brass Tin-PI Post-Ni	7670	7670UXX5				
			7672	7672UXX5				
			7671	7671UXX5				

1200 Series - .560" Overall Length†

.103	14-18	Brass	7270	7270UXX5	Left to Right	B502L/B503L	C180	C181
.105	14-18	Brass Tin-PI	7283	7283UXX5				
			7284	7284UXX5				
	14-12	Brass	7267	7267UXX5				
.111	14-18	Brass	7291	7291UXX5				

* Heyco high volume Application Tooling, designed for 3-5 ton presses - see page 8-57.
Heyco Mini Applicators, designed for 1.5-3 ton bench top presses, are available - see page 8-57.
** "XX" represents Wire Gauge. Please specify Wire Gauge when ordering.
† Not CSA certified.

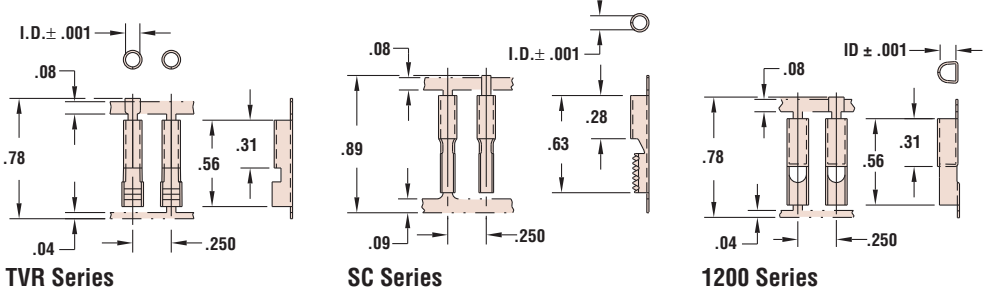

Quick Specs

Materials Alloy 260 Brass (70% Cu, 30% Zn. Higher Cu content resists dezincification)
Tin-PI = Brass, Tin plated before or after stamping
Post-Ni = Brass, Nickel plated after stamping

Certifications Certified by the Canadian Standards Association File 91824