


IOVU-752S

7" TFT WVGA LCD with resistive touchscreen




Features

- 7" TFT WVGA LCD with resistive touchscreen
- Samsung S3C6410 ARM11 677MHz CPU
- Powered by Windows® CE 6.0
- Built-in Ethernet LAN
- Built-in RS-232/422/485 Port
- Supports Power over Ethernet (PoE)
- Multimedia support for MPEG-4/H.263/H.264

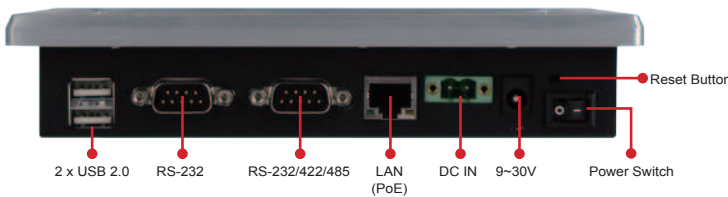

2 x USB 2.0 RS-232 RS-232/422/485 LAN (PoE) DC IN 9~30V Power Switch Reset Button

IOVU-752S Dimensions (Unit: mm)

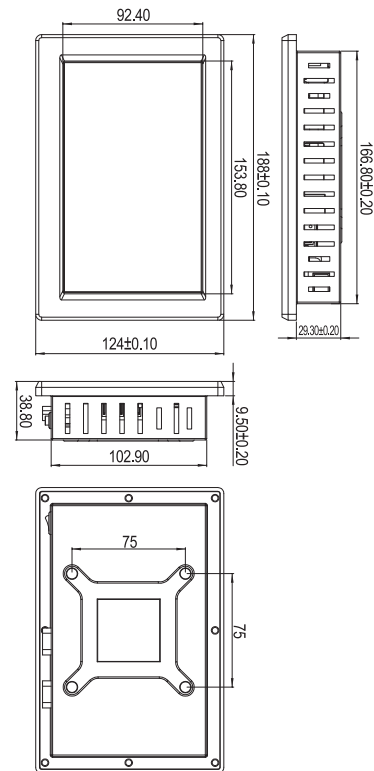

Packing List

- 1 x Utility CD includes application tools, SDK, and technical document
- 1 x Null modem cable
- 1 x Touch pen
- 1 x Screw kit

Ordering Information

Part No.	Description
IOVU-752S-CE6/R10	7" LCD, SAMSUNG S3C6410X66-YB40 667MHz with PoE function, WIN CE6.0, RoHS

Options

Part No.	Description
AFLPK-12	Panel mounting kit
AFLWK-12	VESA 75 wall mounting kit
ARM-11-RS	LCD monitor/PPC arm kit, loading capacity from 3kg~7kg
STAND-A08-RS	LCD monitor/PPC Stand kit for VESA 75 and supports up to 5 kg
VSTAND-A07	LCD monitor/PPC Stand V type for VESA 75, 0~90 degree adjustable hinge and support up to 2.5 Kg
AFLP-12BMSR-U	USB magnetic card reader
AFLP-BRW01-U / AFLPBRB01-U	USB barcode reader (white / black)
AFLP-CDB01 / AFLP-CDW01	VFD customer display (green) 5 x 7 dot matrix (black / white)
63000-FSP060DBAB1553-RS	Power adapter; FSP; FSP060-DBAB1; active PFC; Vin: 90~264VAC; 60W; Dim: 62*110*31.5mm; plug=9.5mm; cable=1500mm; Erp (no loading 0.5W); vout:12VDC; Φ2.5/Φ5.5; CCL; RoHS
63040-010060-060-RS	12V/5A DC 60W power adapter with bare wire, 90~264V AC input