



Model Number

GLK18-8-200-S/25/161/166

Diffuse mode sensor
Plastic connector Micro AC 1/2", 4-pin

Features


- Short design in M18 plastic housing
- Sidelookerversion
- 4 LEDs indicator for 360° visibility
- Optimal price/power ratio
- Optimized potentiometer design for a clear control button layout in the application
- Universell usage at different power supplies

Product information


The GLV/GLK18 series sensors help improve the efficiency of machines and systems. The design of the M18 plastic housing, the connection technology, and sensor properties are highly standardized. Concentrating on the key sensor requirements has produced a robust and reliable product series for DC and AC/DC voltage systems without any over-engineering. The mounting set included in the scope of delivery and the optimized potentiometer design ensure fast assembly and easy configuration.

Release date: 2013-01-09 16:20 Date of issue: 2013-01-23 199806_eng.xml

Dimensions

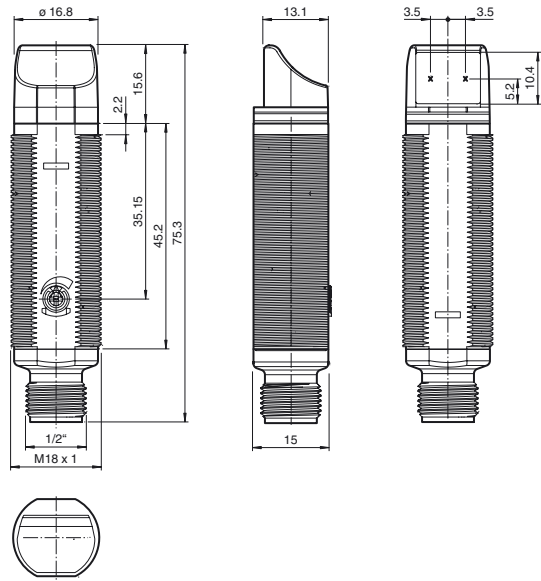


Electrical connection




○ = Light on
● = Dark on

Pinout



Indicators/operating means

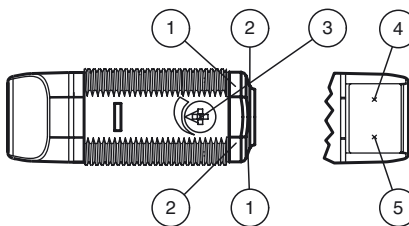

| | | |
|---|------------------------|--------|
| 1 | Operating display | green |
| 2 | Signal display | yellow |
| 3 | Sensitivity adjustment | |
| 4 | Emitter | |
| 5 | Receiver | |

Technical data**General specifications**

| | |
|----------------------------|--|
| Detection range | 50 ... 200 mm adjustable |
| Detection range max. | 0 ... 200 mm |
| Reference target | 100 mm x 100 mm Kodak white |
| Light source | LED |
| Light type | modulated visible red light , 640 nm |
| Approvals | CE |
| Diameter of the light spot | approx. 15 mm at 200 mm |
| Angle of divergence | approx. 4 ° |
| Optical face | lateral |
| Ambient light limit | 30000 Lux ; according to EN 60947-5-2:2007 |
| Hysteresis | H < 15 % |
| Accessories provided | Mounting aids |

Indicators/operating means

| | |
|-------------------|--|
| Operating display | LED green, statically lit Power on |
| Function display | LED yellow: lights when object is detected ; flashes when falling short of the stability control |
| Controls | sensitivity adjustment |

Electrical specifications

| | | |
|------------------------|-------|--------------------|
| Operating voltage | U_B | 20 ... 250 V AC/DC |
| No-load supply current | I_0 | < 2.5 mA |

Output

| | | |
|---------------------|---|--------------------|
| Switching type | light on | |
| Signal output | N-channel MOSFET, short circuit protected | |
| Switching voltage | max. 250 V AC/DC | |
| Switching current | max. 200 mA | |
| Voltage drop | U_d | ≤ 3.5 V AC/DC |
| Switching frequency | f | 50 Hz |
| Response time | | ≤ 10 ms |

Ambient conditions

| | |
|---------------------|--------------------------------|
| Ambient temperature | -20 ... 60 °C (-4 ... 140 °F) |
| Storage temperature | -40 ... 70 °C (-40 ... 158 °F) |

Mechanical specifications


| | |
|-------------------|---------------------------------------|
| Protection degree | IP67 |
| Connection | Micro AC connector, 1/2" V124 ; 4-pin |
| Material | |
| Housing | PC-PBT |
| Optical face | PMMA |
| Mass | approx. 10 g |

Compliance with standards and directives

| | |
|---------------------|--|
| Standard conformity | |
| Product standard | EN 60947-5-2:2007 ; IEC 60947-5-2:2007 |
| Standards | UL 508 |

Approvals and certificates

| | |
|------------------|---|
| Protection class | II, rated insulation voltage ≤ 250 V AC with pollution degree 1-2 according to IEC 60664-1 |
| UL approval | cULus Listed, Type 1 enclosure |
| CCC approval | Certified by China Compulsory Certification (CCC) |

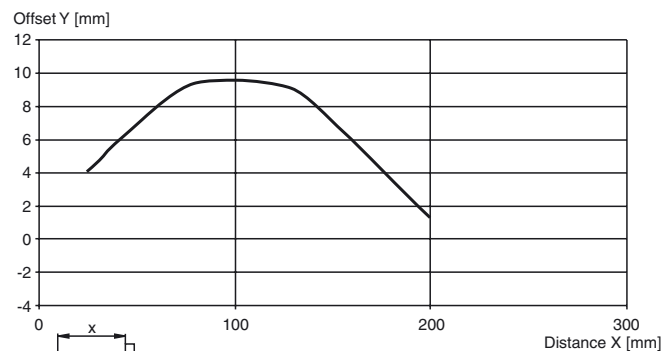Curves/Diagrams**Characteristic response curve****Accessories****CPZ18B03**

Mounting Bracket with swivel nut

BF 18

Mounting flange, 18 mm

BF 18-F

Mounting flange with dead stop, 18 mm

BF 5-30

Universal mounting bracket for cylindrical sensors with a diameter of 5 ... 30 mm



V124-G-YE2M-PVC

Connecting cable, 1/2" - 20 UNF, 4-pin, PVC cable

V124-W-YE2M-PVC

Connecting cable, 1/2" - 20 UNF, 4-pin, PVC cable

Other suitable accessories can be found at www.pepperl-fuchs.com

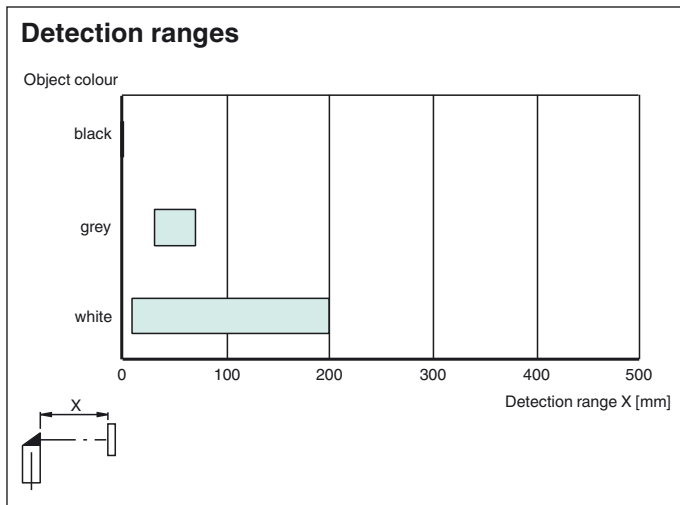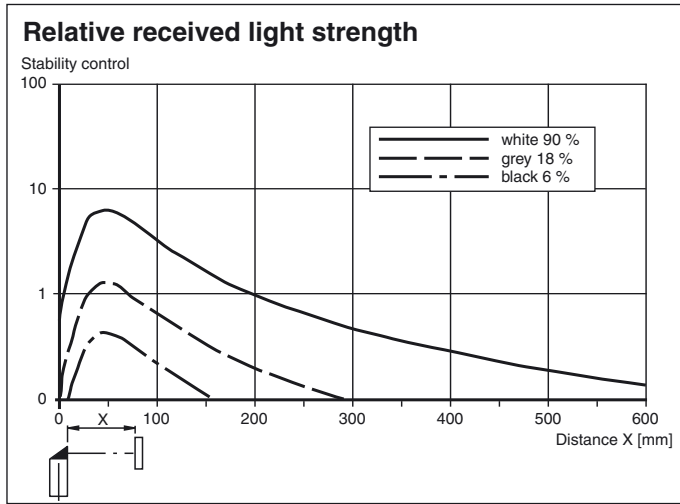

Release date: 2013-01-09 16:20 Date of issue: 2013-01-23 199806_eng.xml