



Model Number


V15-G-BK10M-PUR-U

Female cordset, M12, 5-pin, PUR cable

Features

- UL Recognized Component
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Protection degree IP67 / IP68 / IP69K
- Flame resistant cable
- Halogen-free
- Appropriate for conveyor chains

Dimensions

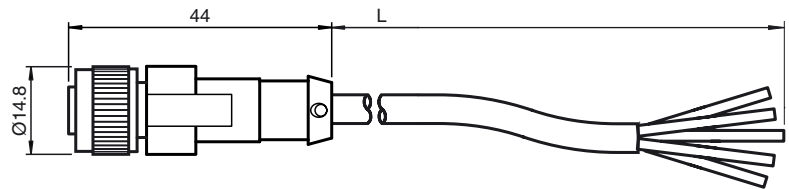

Technical data

General specifications

Number of pins	5
Connection 1	female connector
Construction type 1	straight
Threading 1	M12
Connection 2	cable end

Electrical specifications

Operating voltage	U_B	max. 60 V AC/DC
Operating current		max. 4 A
Volume resistance		< 5 m Ω

Ambient conditions

Ambient temperature	Body: -25 ... 90 °C (-13 ... 194 °F) cable, flexing: -25 ... 80 °C (-13 ... 176 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F)
Pollution Degree	3

Mechanical specifications

Protection degree	IP65 / IP68 / IP69K	
Material		
Contacts	CuSn	
Contact surface	Ni/Au	
Body	TPU, black	
Cable	PUR	
Slotted nut	Zinc die-casting, nickel-plated	
Core insulation	PP	
Cable	extra-fine wire, flexible	
Sheath diameter	Ø 5 mm	
Bending radius	> 10 x cable diameter, moving > 5 x cable diameter, fixed	
Color	dark grey (RAL 7021)	
Cores	5 x 0.34 mm ² , 22 AWG	
Conductor construction	42 x 0.1 mm Ø	
Length	L	10 m
Flammability		
Cable	FT2	

Compliance with standards and directives

Standard conformity	
Protection degree	EN 60529:2000
Standards	IEC 61076-2-101:2008
Flammability	Body: UL 94 Line: UL 1581 Section 1061; IEC 60332-1-2:2004

Approvals and certificates

UL approval	UL Recognized General purpose
-------------	-------------------------------

Electrical connection

