

### DUAL SCHOTTKY RECTIFIERS

VOLTAGE RANGE: 80 - 100 V

CURRENT: 10 A


#### FEATURES

- ◇ High surge capacity.
- ◇ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.
- ◇ Metal silicon junction, majority carrier conduction.
- ◇ High current capacity, low forward voltage drop.
- ◇ Guard ring for over voltage protection.

#### MECHANICAL DATA

- ◇ Case: JEDEC TO-220AB, molded plastic body
- ◇ Terminals: Solderable per MIL-STD-750, Method 2026
- ◇ Polarity: As marked
- ◇ Weight: 0.071 ounce, 2.006 grams
- ◇ Position: Any

#### TO-220AB

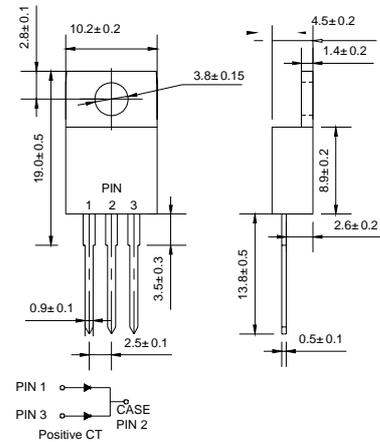

Dimensions in millimeters

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

		MBR 1080CT	MBR 1090CT	MBR 10100CT	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	80	90	100	V
Maximum RMS Voltage	$V_{RMS}$	56	63	70	V
Maximum DC blocking voltage	$V_{DC}$	80	90	100	V
Maximum average forward rectified current @ $T_c = 105^\circ C$ total device per leg	$I_{F(AV)}$	10 5.0			A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per leg	$I_{FSM}$	120			A
Maximum forward voltage per leg (NOTE 1) ( $I_F=5.0A, T_c=125^\circ C$ )	$V_F$	0.75			V
( $I_F=5.0A, T_c=25^\circ C$ )		0.85			
Maximum reverse current at rated DC blocking voltage @ $T_j=25^\circ C$	$I_R$	0.1			mA
@ $T_j=100^\circ C$		6.0			
Maximum thermal resistance per leg	$R_{\theta JC}$	4.4			$^\circ C/W$
Operating junction temperature range	$T_J$	- 55 ---- + 150			$^\circ C$
Storage temperature range	$T_{STG}$	- 55 ---- + 150			$^\circ C$


NOTE: 1. Pulse test: 300µs pulse width, 1% duty cycle.

2. 2.0µs pulse width, f=1.0KHz


3. Thermal resistance from junction to case.

www.galaxycn.com


**FIG.1 – FORWARD CURRENT DERATING CURVE**

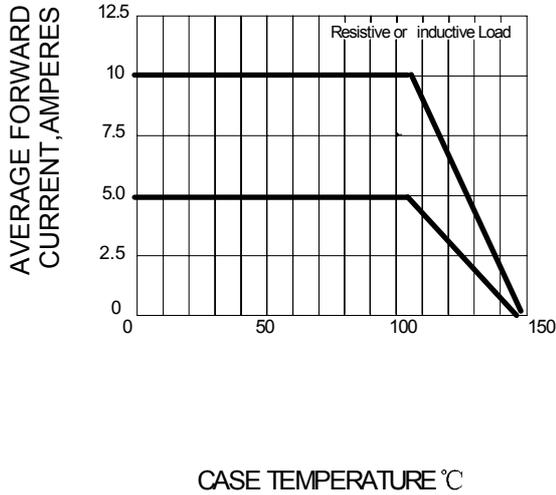

**FIG.2 – MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PERLEG**

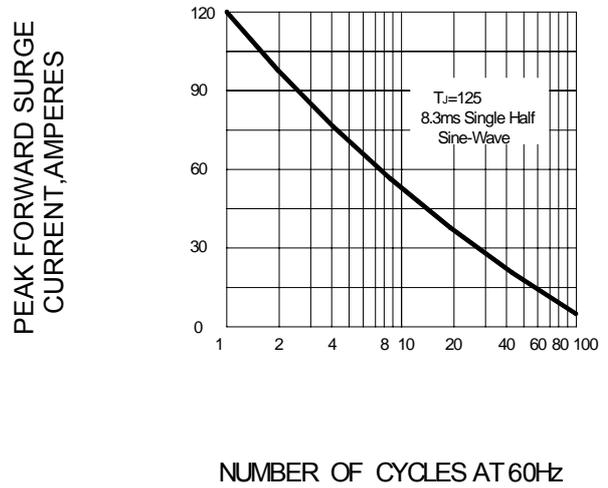

**FIG.3 – TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC PERLEG**

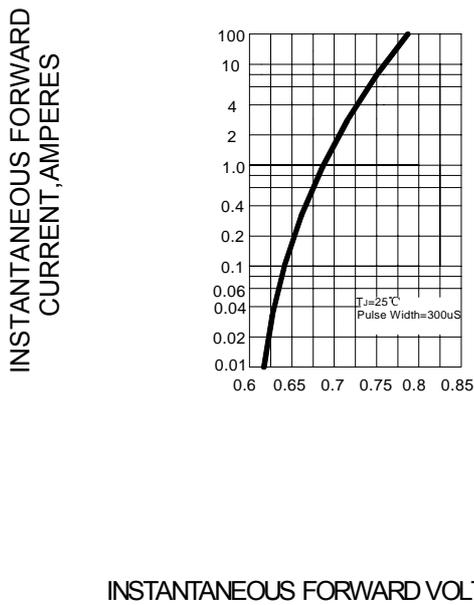

**FIG.4 – TYPICAL REVERSE CHARACTERISTICS**

