

## Surface mount schottky barrier diode

## BAS70/-04/-05/-06

### FEATURES


- Low turn-on voltage.
- Fast switching.
- PN Junction guard ring for transient and ESD protection.
- Ultra-small surface mount package.
- Also available in lead free version.



Lead-free

### APPLICATIONS

- High speed switching applications.
- Circuit protecting.
- Voltage clamping.

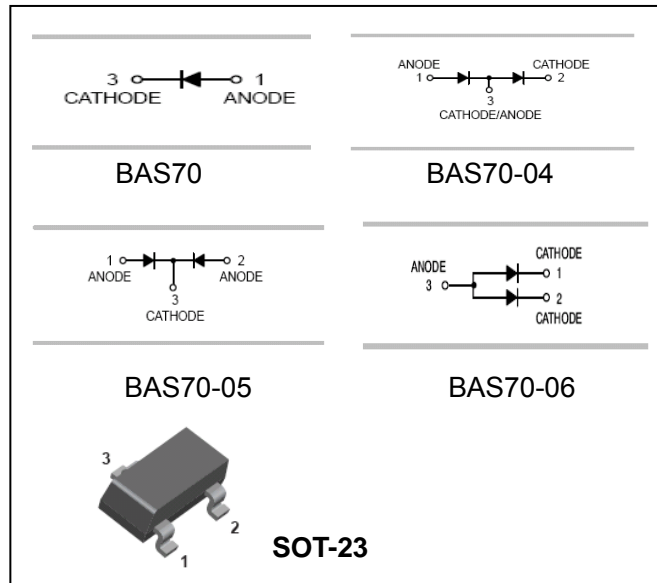

### ORDERING INFORMATION

Type No.	Marking	Package Code
BAS70	73	SOT-23
BAS70-04	74	SOT-23
BAS70-05	75	SOT-23
BAS70-06	76	SOT-23

### MAXIMUM RATING @ Ta=25°C unless otherwise specified

Characteristic	Symbol	Limits	Unit
Peak Repetitive Reverse Voltage	$V_{RRM}$		
Working Peak Reverse Voltage	$V_{RWM}$	70	V
DC Reverse Voltage	$V_R$		
RMS Reverse voltage	$V_{R(RMS)}$	49	V
Forward Continuous Current	$I_F$	70	mA
Non-Repetitive Peak Forward Surge Current @t <sub>p</sub> <1.0s	$I_{FSM}$	100	mA
Power Dissipation	$P_d$	200	mW
Thermal Resistance, Junction to Ambient Air	$R_{\theta JA}$	625	°C/W
Operating Junction Temperature Range	$T_j$	-55 to +125	°C
Storage Temperature Range	$T_{STG}$	-65 to +150	°C

## Surface mount schottky barrier diode

## BAS70/-04/-05/-06

### ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Characteristic	Symbol	Min	MAX	UNIT	Test Condition
Reverse Breakdown Voltage	$V_{(BR)R}$	70	-	V	$I_{(BR)} = 10\mu A$
Forward Voltage	$V_F$	-	410 1000	mV	$t_P < 300\mu s, I_F = 1.0mA$ $t_P < 300\mu s, I_F = 15mA$
Reverse Leakage Current	$I_R$	-	100	nA	$t_P < 300\mu s, V_R = 50V$
Junction Capacitance	$C_j$	-	2.0	pF	$V_R = 0V, f = 1.0MHz$
Reverse Recovery Time	$t_{rr}$	-	5.0	ns	$I_F = I_R = 10mA$ to $I_R = 1.0mA, R_L = 100\Omega$

### TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

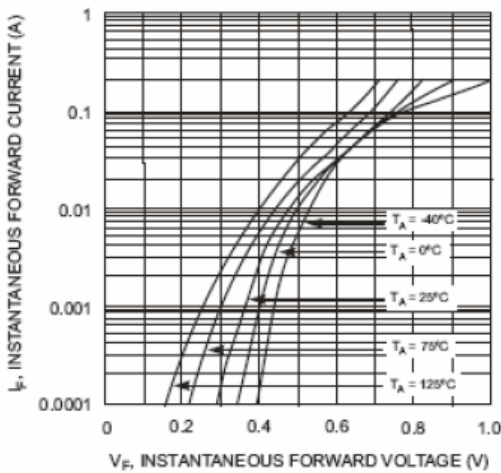


Fig. 1 Typical Forward Voltage

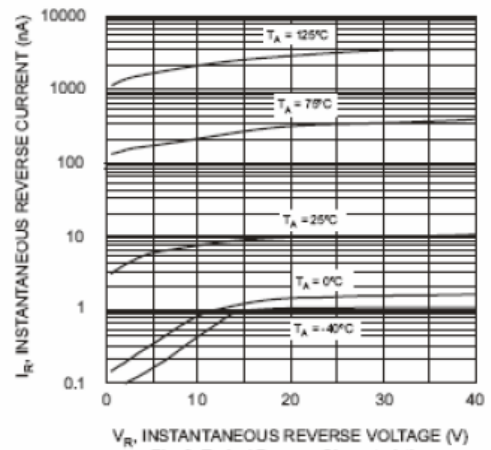


Fig. 2 Typical Reverse Characteristics

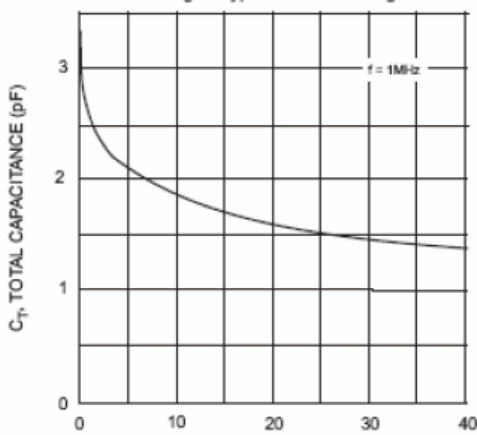


Fig. 3 Typical Capacitance

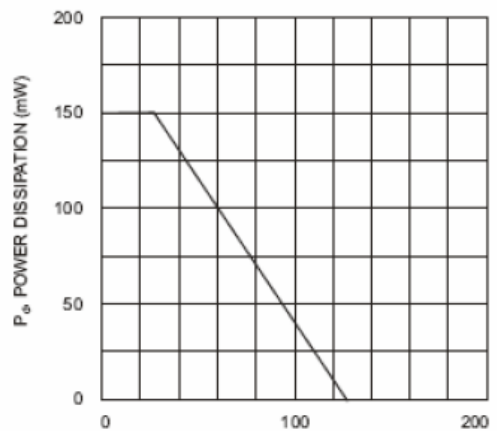


Fig. 4 Power Derating Curve, Total Package


## Surface mount schottky barrier diode

## BAS70/-04/-05/-06


### PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

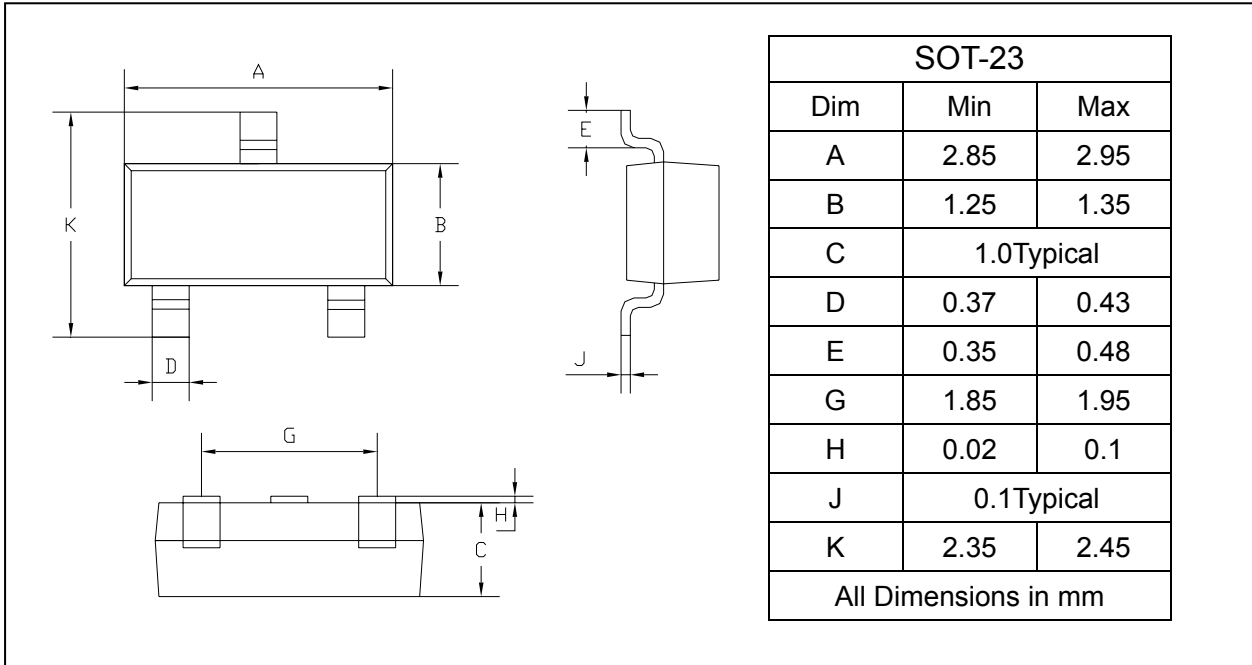

### SOLDERING FOOTPRINT

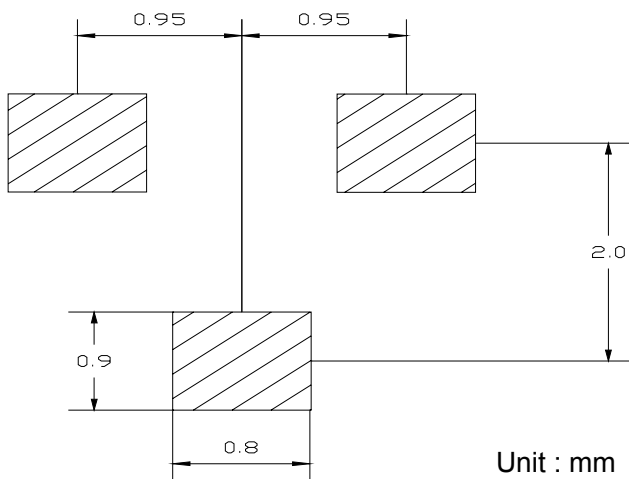

### PACKAGE INFORMATION

Device	Package	Shipping
BAS70/-04/-05/-06	SOT-23	3000/Tape&Reel