



Smart Technology. Delivered.

# Industrial Wireless RFID Antenna Solutions

*Laird Technologies designs and manufactures customized, performance-critical products for wireless and other advanced electronics applications.*





Smart Technology. Delivered.

## About Laird

Laird is a global technology business focused on enabling wireless communication and smart systems, and providing components and systems that protect electronics. Laird operates through two divisions, Wireless Systems and Performance Materials. Wireless Systems solutions include antenna systems, embedded wireless modules, telematics products and wireless automation and control solutions. Performance Materials solutions include electromagnetic interference shielding, thermal management and signal integrity products. As a leader in the design, supply and support of innovative technology, our products allow people, organisations, machines and applications to connect effectively, helping to build a world where smart technology transforms the way of life. Custom products are supplied to major sectors of the electronics industry including the handset, telecommunications, IT, automotive, public safety, consumer, medical, rail, mining and industrial markets. Providing value and differentiation to our customers through innovation, reliable fulfilment and speed, Laird PLC is listed and headquartered in London, and employs over 9,000 people in more than 58 facilities located in 18 countries.

## A Brief Introduction to RFID

Radio frequency identification (RFID) is a generic term for technologies that use radio waves to automatically identify people or objects. There are several methods of identification, the most common being a stored serial number that identifies a person or object, and perhaps other information, on a microchip that is integrated with an antenna on an RFID "tag". The tag antenna enables the chip to transmit the identification information back to a reader. The reader then converts the radio waves reflected back from the RFID tag into digital information that can then be passed onto computers, which can then process that information.

## World-Leading Solutions

Laird Technologies is the leading provider of RFID antennas for high-performance reader applications throughout the world. With end-to-end system knowledge, Laird Technologies adds value to their customers in every RFID antenna application by employing advanced and proprietary design tools, including Artificial Intelligence Optimization (AIO), bringing novel designs to market with unmatched performance.

## Depend on Laird Technologies

The RFID technology platform provides the means to significantly enhance user rate accuracy via the use high-performance, optimized antennas. Laird supports RFID use at OEMs and their customers by better understanding the RFID environment and its challenges. We will test the RFID antenna/reader systems for optimization of read capability and range performance and by providing test antennas and AIO analysis for application development.

## Benefits of RFID Technology

RFID antennas are used to read RFID tags in warehouses, production lines, retail stores, medical facilities, etc. Benefits include:

- Multiple frequency bands
- Indoor/outdoor mounting options
- Low axial ratio - defines the quality of the circular polarization and improves RFID tag read reliability
- Rugged design - RFID antennas typically used in tough environments like warehouses and production lines
- All-metal construction
- Left-hand (LH) and right-hand (RH) circular polarization
- Vertical linear polarization (VPOL) and horizontal linear polarization (HPOL)

# Industrial Wireless RFID Antennas

## General Purpose Antennas

Laird Technologies' robust general purpose RFID antennas provide high-performance functions across all popular domestic and international UHF RFID frequencies for indoor and outdoor use. Industry-renowned design methodology achieves maximum efficiency and performance across the entire frequency band.



PART	FREQUENCY	GAIN	VSWR	POLARIZATION	BEAMWIDTH (3 DB, DEGREES)		AXIAL RATIO (DB)	DIMENSIONS (MM)	CONNECTORS	CONFIGURATION WITH MOUNTING OPTION		
					HORIZONTAL	ELEVATION				4-Post with HDMNT Mount	2-Post with Rack Mount	Flush with Flush Mount
S9028PCR	902-928 MHz	9 dBic	1.3:1	RH CP	70	70	1	259 x 259 x 33.5	pigtail with multiple choices	4-Post with HDMNT Mount	2-Post with Rack Mount	Flush with Flush Mount
S9028PCL	902-928 MHz	9 dBic	1.3:1	LH CP	70	70	1	259 x 259 x 33.5	pigtail with multiple choices			
S8658PR	865-868 MHz	8.5 dBic	1.5:1	RH CP	70	70	1	259 x 259 x 33.5	pigtail with multiple choices	4-Post with HDMNT Mount		2-Post with Rack Mount
S8658PL	865-868 MHz	8.5 dBic	1.5:1	LH CP	70	70	1	259 x 259 x 33.5	pigtail with multiple choices			
S8658WPR	865-965 MHz	8.5 dBic	1.4:1	RH CP	70	70	1	259 x 259 x 33.5	pigtail with multiple choices	4-Post with HDMNT Mount	4-Post with VESA Mount	Flush with Flush Mount
S8658WPL	865-965 MHz	8.5 dBic	1.4:1	LH CP	70	70	1	259 x 259 x 33.5	pigtail with multiple choices			
S9025PL	902-928 MHz	5.5 dBic	1.5:1	LH CP	100	100	2	132 x 132 x 18	bulkhead with multiple choices	2-Post with HKIT-S9025P-001 Mount		2-Post with ALLPMTE Mount
S9025PR	902-928 MHz	5.5 dBic	1.5:1	LH CP	100	100	2	132 x 132 x 18	bulkhead with multiple choices			
S8655PR	865-868 MHz	5.5 dBic	1.5:1	RH CP	100	100	2	132 x 132 x 18	bulkhead with multiple choices			
S8655PL	865-868 MHz	5.5 dBic	1.5:1	LH CP	100	100	2	132 x 132 x 18	bulkhead with multiple choices			
S2406MPC	2400-2500 MHz	6.5 dBic	1.5:1	RH CP	65	65	-	148 x 97 x 38	pigtail with multiple choices	Flush with Flush Mount		
S2408PC	2400-2500 MHz	8 dBic	1.5:1	RH CP	55	55	-	155 x 155 x 32	pigtail with multiple choices			
S9028P	902-928 MHz	8 dBi	1.5:1	Linear vertical	70	65	-	307 x 205 x 53	pigtail with multiple choices			
PAL90209H	902 - 928 MHz	9 dBic	1.3:1	RH CP	70	70	1	259 x 259 x 38.5	fixed N-female	4-Post with HDMNT Mount		
PAR90209H	902 - 928 MHz	9 dBic	1.3:1	LH CP	70	70	1	259 x 259 x 38.5	fixed N-female			



# Industrial Wireless RFID Antennas

## Near Field Antennas

Laird Technologies' RF system engineering and antenna design technologies improve RFID read rates by optimizing the reader-tag communication link in this unique application environment.



PART	FREQUENCY	GAIN	VSWR	POLARIZATION	MOUNTING STYLE	DIMENSIONS (MM)	CONNECTORS	CABLE(S)
PNS902065C	902-928 MHz	6 dBi	1.5:1	Dual-slant 45 degrees	Table top, flush (in cut-out hole or underneath surface)	261 x 261 x68	pigtail with multiple choices	Side entry
PNS90206BC	902-928 MHz	6 dBi	1.5:1	Dual-slant 45 degrees	Table top, flush (in cut-out hole or underneath surface)	261 x 261 x68	pigtail with multiple choices	Bottom entry
PNL902065C	902-928 MHz	6 dBi	1.5:1	LH CP	Table top, flush (in cut-out hole or underneath surface)	261 x 261 x68	pigtail with multiple choices	Side entry
PNL90206BC	902-928 MHz	6 dBi	1.5:1	LH CP	Table top, flush (in cut-out hole or underneath surface)	261 x 261 x68	pigtail with multiple choices	Bottom entry
PNS865065C	865-868 MHz	6 dBi	1.5:1	Dual-slant 45 degrees	Table top, flush (in cut-out hole or underneath surface)	261 x 261 x68	pigtail with multiple choices	Side entry
PNS86506BC	865-868 MHz	6 dBi	1.5:1	Dual-slant 45 degrees	Table top, flush (in cut-out hole or underneath surface)	261 x 261 x68	pigtail with multiple choices	Bottom entry
PNL865065C	865-868 MHz	6 dBi	1.5:1	LH CP	Table top, flush (in cut-out hole or underneath surface)	261 x 261 x68	pigtail with multiple choices	Side entry
PNL86506BC	865-868 MHz	6 dBi	1.5:1	LH CP	Table top, flush (in cut-out hole or underneath surface)	261 x 261 x68	pigtail with multiple choices	Bottom entry

## Mounting Options

Laird Technologies offers various mounting options providing flexibility and maximum performance from your antenna.



• Fork Lift Mount



• HDMNT with 4-Post Configuration

• Rack Mount



• VESA Mount (Hole Pattern Only)

• Flush Mount



PART	OFFERED FOR	MECHANICAL FEATURES
HDMNT	S9028PR/L, S8658PR/L, S8658WPR/L, PAL90209H-FNF	IP54 with bottom exit cable, IP67 with Fixed N connector
ALLPMTE-002	S9025PR/L, S8655PR/L	Articulating mount
Rack Mount	S9028PCL/R, S8658PL/R	IP54 with bottom exit cable
VESA (Hole Pattern)	S8658WPR/L	IP54 with bottom exit cable
Flush Mount	S9028PR/L	IP54 with bottom exit cable
HKIT-S9025P-001	S9025PL/R, S8655PL/R	IP67 fixed connector
Fork Lift	S9026XRRN, S8656XRRN	IP67 with Fixed mount connector



• HKIT-S9025P-001



• ALLPMTE-002

## Accessories

Laird supplies accessories that compliment its antennas systems. Cable assemblies, surge suppressors, lightning arrestors, POE inserters and splitters, connector adapters and die-cast aluminum enclosures are available.

# Industrial Wireless RFID Antennas

## Special Application Antennas


Laird Technologies offers innovative antenna systems that give the operator ultimate system flexibility.



PART	DESCRIPTION/ APPLICATION	FREQUENCY	GAIN	VSWR	POLARIZATION	BEAMWIDTH (3 DB, DEGREES)		AXIAL RATIO (DB)	MOUNTING STYLE	DIMENSIONS (MM)	CONNECTORS
						HORIZONTAL	ELEVATION				
DCE9028PLFSMF	Die-cast enclosure	902-928 MHz	9 dBic	1.3:1	LH CP	70	70	1	Mast, wall	317 x 264 x 99	SMA
DCE9028PRFSMF	Die-cast enclosure	902-928 MHz	9 dBic	1.3:1	RH CP	70	70	1	Mast, wall	317 x 264 x 99	SMA
DCE8658PLFSMF	Die-cast enclosure	865-870 MHz	8.5 dBic	1.5:1	LH CP	70	70	1	Mast, wall	317 x 264 x 99	SMA
DCE8658PRFSMF	Die-cast enclosure	865-870 MHz	8.5 dBic	1.5:1	RH CP	70	70	1	Mast, wall	317 x 264 x 99	SMA
DCE8658WPRFSMF	Die-cast enclosure	865-960 MHz	8.5 dBic	1.4:1	RH CP	65	65	1	Mast, wall	317 x 264 x 99	SMA
DCE8658WPLFSMF	Die-cast enclosure	865-960 MHz	8.5 dBic	1.4:1	LH CP	65	65	1	Mast, wall	317 x 264 x 99	SMA
S9026X	All metal/fork lift, high impact	902-928 MHz	6 dBic	1.5:1	RH CP	80	80	3	Flush	192 x 192 x 24	N
S8656X	All metal/fork lift, high impact	865-868 MHz	6 dBic	1.5:1	RH CP	80	80	3	Flush	192 x 192 x 24	N

## Internal Antennas (located inside device)

Laird Technologies provides advanced internal high-performance RFID antenna designs that function across all popular domestic and international UHF RFID frequencies for indoor and outdoor use.

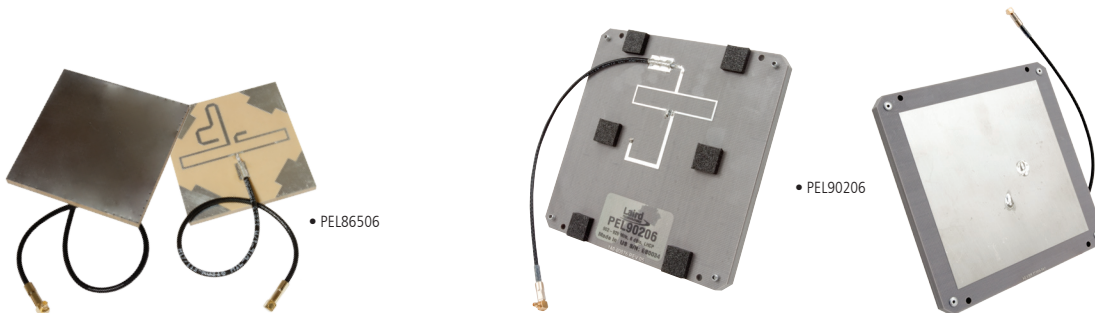

PART	FREQUENCY	GAIN	VSWR	POLARIZATION	BEAMWIDTH (3 DB, DEGREES)		AXIAL RATIO (DB)	MOUNTING STYLE	DIMENSIONS (MM)	CONNECTORS
					HORIZONTAL	ELEVATION				
PEL90206	902-928 MHz	6 dBic	1.5:1	LH CP	90	90	1	Standoff	120 x 120 x 7	pigtail with multiple choices
PEL86506	865-868 MHz	6 dBic	1.5:1	LH CP	100	100	1	Standoff	61 x 61 x 4	pigtail with multiple choices



# Laird™

Smart Technology. Delivered.

[www.lairdtech.com](http://www.lairdtech.com)

Americas: +1.847.839.6907

Europe: +44.1628.858941

Asia: +86.21.5855.0827.127

IAS-BRO-INDUSTRIAL-RFID 1213

Any information furnished by Laird and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird, Laird Technologies, Inc or any of its affiliates or agents shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2013 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.

**ANTENNAS & RECEPTION | EMBEDDED WIRELESS | EMI | TELEMATICS | THERMAL | WIRELESS AUTOMATION & CONTROL**