

Customer Information Sheet

DRAWING No.: D01-994XXXX

SHEET 2 OF 2


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

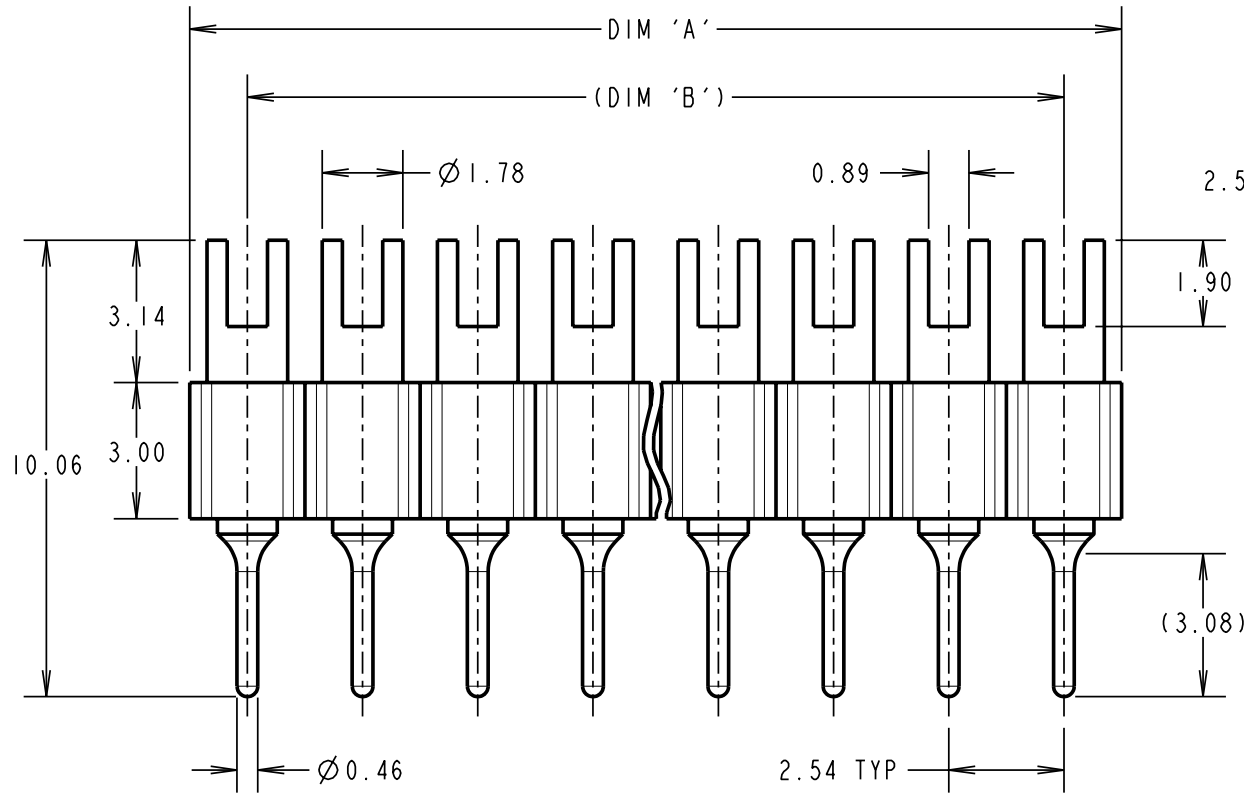

SPECIFICATION:

MATERIAL:
MOULDING:
 01 = 30% G/F POLYESTER, UL94V-0, BLACK
MOULDING:
 46 = 30% G/F POLYAMIDE 46, UL94V-0, BLACK
CONTACT = BRASS
FINISH:
 CONTACT = 3.5-5.0µ 100% TIN OVER 2µ NICKEL
ELECTRICAL:
 CURRENT RATING AT 25°C = 1.5A
 CURRENT RATING AT 85°C = 0.25A
 CONTACT RESISTANCE:
 INITIAL = 15 mΩ MAX
 AFTER CONDITIONING = 23 mΩ MAX
 INSULATION RESISTANCE:
 INITIAL = 1,000 MΩ MIN
 AFTER CONDITIONING = 100 MΩ MIN
MECHANICAL:
 DURABILITY = 1,000 OPERATIONS
ENVIRONMENTAL:
 TEMPERATURE RANGE = -55°C TO +125°C
PACKING: BAG
 FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C004XX (LATEST ISSUE)

ORDER CODE:
D01-994XXXX
 No. OF CONTACTS
 20, 32
 FINISH _____
 01 = TIN
 46 = 100% TIN (RoHS COMPLIANT)

PART No.	No. OF CONTACTS	DIM 'A'	DIM 'B'
D01-99420XX	20	51.10-50.70	(48.26)
D01-99432XX	32	81.20-81.60	(78.74)

NOTES:
 1. RECOMMENDED PCB HOLE SIZE = Ø0.80mm MIN.

RA	9	14.01.09	10257
NAME	ISS.	DATE	C/NOTE
APPROVED:		R. ADDE	
CHECKED:		M.G. PLESTED	
DRAWN:		B. CORNER	
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

HARWIN USA
 TEL: 603 893 5376
 FAX: 603 893 5396
 mis@harwin.com

HARWIN Europe (UK)
 TEL: 023 9231 4545
 FAX: 023 9231 4590
 mis@harwin.co.uk

HARWIN Asia
 TEL: +65 6 779 4909
 FAX: +65 6 779 3868
 mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
 X. = ±1mm
 X.X = ±0.25mm
 X.XX = ±0.10mm
 X.XXX = ±0.01mm
ANGLES = ±5°
 UNLESS STATED

MATERIAL:
 SEE ABOVE
FINISH:
 SEE ABOVE
S/AREA:
 mm²

TITLE:
 I.C. SIL SLOTTED HEADER
DRAWING NUMBER:
D01-994XXXX
 SHT 2 OF 2