


NOTES: ALL DIMENSIONS AND NOTES  
MARKED \* ARE CRITICAL AND  
MUST BE CHECKED IN ACCORDANCE  
WITH QUALITY DOC. QI-02A

## TOLERANCES

X.X =  $\pm 0.25$ mm  
X.XX =  $\pm 0.20$ mm

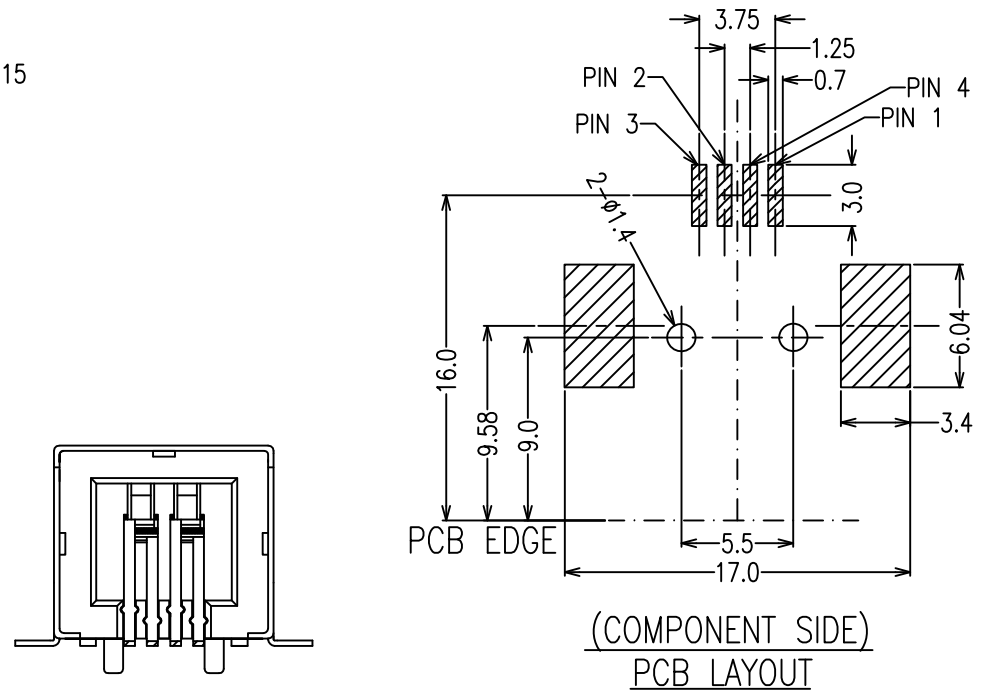

## SPECIFICATIONS:

## MATERIAL:-

① HOUSING: NYLON PA9T G.F. (UL 94V-0), WHITE, QTY: 1

② PIN TERMINAL: PHOSPHOR BRONZE,  
T=0.25mm, QTY: 4

③ SHELL: BRASS, T=0.3mm, QTY: 1

## FINISH:-

② PIN TERMINAL: GOLD/TIN PLATED OVER NICKEL

③ SHELL: Ni PLATED

## Technical Specification: -

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage: 750V AC (rms) for 1 Minute(Rev. 1.1)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

Soldering Temp.: 260 $\pm$ 5°C.

Leo	2	03.03.14	A423
Allan	1	01.08.06	-
NAME	ISS.	DATE	C/NOTE

## APPROVED:

CHECKED: D.P

DRAWN: Leo

CUSTOMER REF.:

ASSEMBLY DRG:

# HARWIN

HARWIN USA  
TEL: 603 893 5376  
FAX: 603 893 5396  
mis@harwin.com

HARWIN Europe (UK)  
TEL: 023 9231 4545  
FAX: 023 9231 4590  
mis@harwin.co.uk

HARWIN Asia  
TEL: +65 6 779 4909  
FAX: +65 6 779 3868  
mis@harwin.com.sg

THIS DRAWING AND ANY  
INFORMATION OR DESCRIPTIVE  
MATTER SET OUT HEREON ARE  
CONFIDENTIAL AND COPYRIGHT  
PROPERTY OF THE HARWIN  
GROUP AND MUST NOT BE  
DISCLOSED, LOANED, COPIED  
OR USED FOR MANUFACTURING,  
TENDERING OR FOR ANY  
OTHER PURPOSE WITHOUT  
THEIR WRITTEN PERMISSION.

## TOLERANCES

X. =  $\pm 1$ mm  
X.X =  $\pm 0.25$ mm  
X.XX =  $\pm 0.10$ mm  
X.XXX =  $\pm 0.01$ mm

ANGLES =  $\pm 5^\circ$

UNLESS STATED

## MATERIAL:

SEE NOTES

## FINISH:

SEE NOTES

## S/AREA:

mm?

## TITLE:

USB B TYPE FEMALE SMT

## DRAWING NUMBER:

M701-370442

SHT  
1  
OF  
1