


## Thick Film Semi-Precision Metal Glaze™ Power Resistors

### GS-3 Series

- Superior surge performance
- Resistance range from 1Ω - 3MΩ
- Standard tolerances of ±1%, ±2%, ±5%
- Power rating of 3W @25°C; 2W @70°C
- Effective as carbon composite replacement

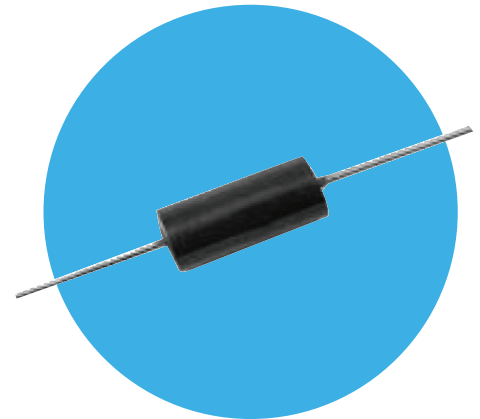

 All Pb-free parts comply with EU Directive 2011/65/EU (RoHS2)

### Electrical Data

Part Number	Power Rating (Watts)	Resistance Range (Ohms)	Tolerance (±%)	TCR (±ppm/°C)	Maximum Operating Voltage (Volts)	Dielectric Withstanding Voltage (Volts)
GS-3	2.0 (@ 70°C) 3.0 (@ 25°C)	1.0 - 3M	1, 2, 5	50 (>10Ω) 100, 200 (≥ 1Ω)	1000	1000

### Environmental Data


Test		Maximum ΔR Limits			
		MIL-R-26	MIL-R-10509D	MIL-R-22684	GS-3
TCR	±ppm/°C	30	100	200	100/50
Load life	%ΔR	0.5	1.0	2.0	2.0
Short term overload	%ΔR	0.20	0.50	0.50	0.20
Moisture	%ΔR	0.20	1.50	1.50	0.40
Temperature Cycling	%ΔR	0.20	0.50	-	0.20
Solder Effect	%ΔR	-	0.50	0.50	0.20
Termination Strength	%ΔR	0.10	0.20	0.50	0.10
Shock	%ΔR	0.10	0.50	0.50	0.10
Vibration	%ΔR	0.10	0.50	0.50	0.10
Operating Temperature		-55°C to +175°C			

#### General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

GS-3 Series


Physical Data

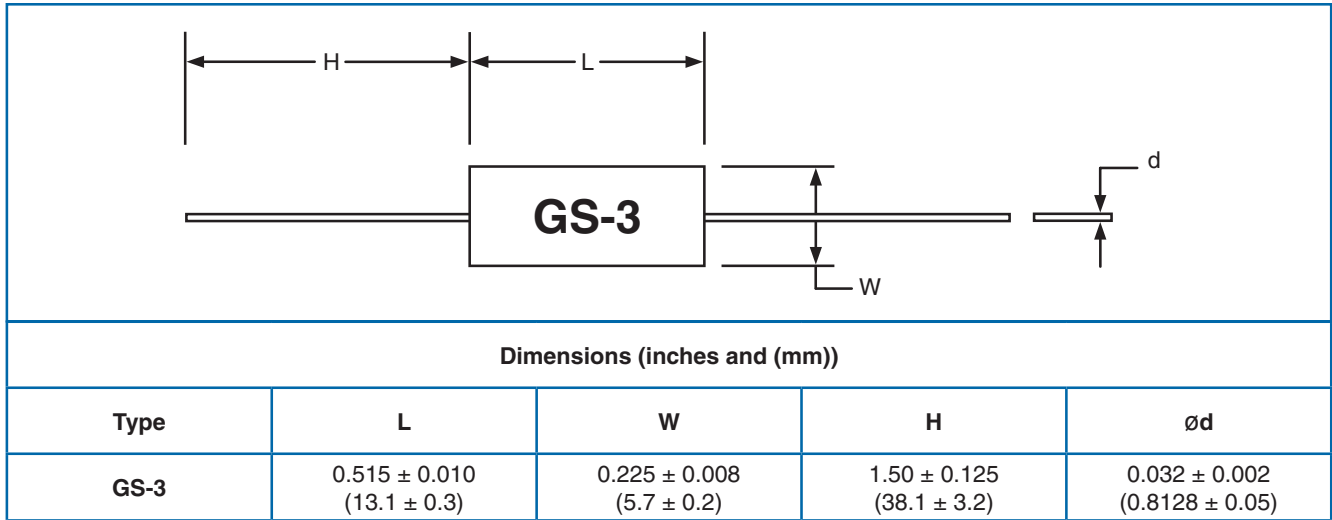

Power Derating Chart

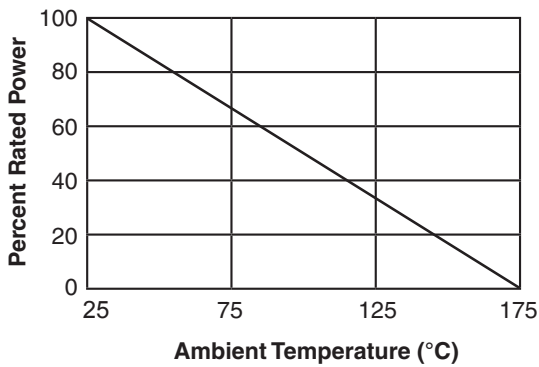

Hot Spot Temperature +25°C Ambient

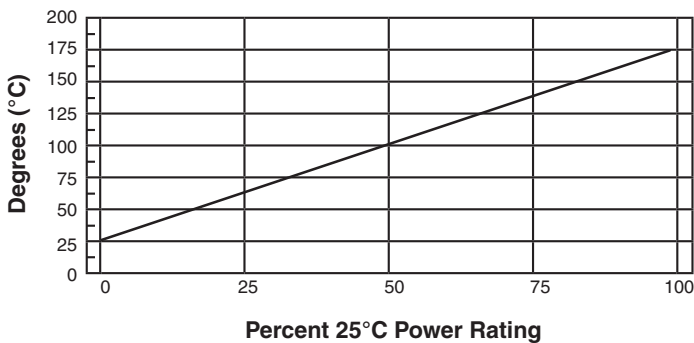


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

GS-3 Series

## Ordering Data

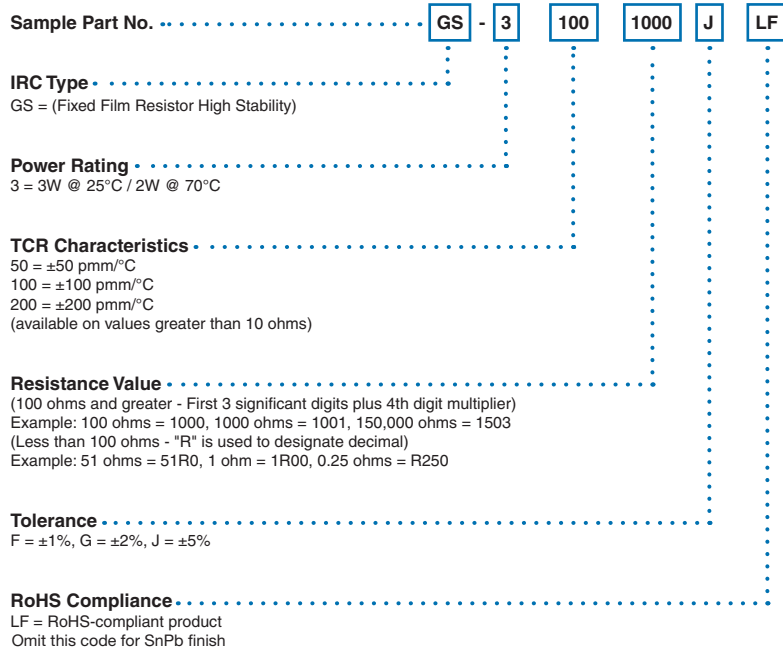

**General Note**

TT Electronics reserves the right to make changes in product specification without notice or liability.  
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.