
Resistors



Single-In-Line Conformal Coated Resistor/Capacitor Networks

CR Series

- 4 to 14 Leads
- Standard and custom circuits
- Space saving design





All parts are Pb-free and comply with EU Directive 2011/65/EU (RoHS2)

Electrical (Capacitor)

Rated Voltage				25Vdc, 50Vdc, 100Vdc
Capacitance Range				Custom 2.2pF to 10pF max.)
Tolerance	J Tol. ±5%	K Tol. ±10%	M Tol. ±20%	Z Tol. +80% to -20%
Temperature Coefficient (% of Change)				Refer to Dielectric Table
Operating Temperature Range			CG	i, SL & X7R: -55°C to +125°C Y5V: -30°C to +85°C

Electrical (Resistor)

Power Dissipation, Watts, at 70°C			1/8 to 1/4 per resistor
Operating Voltage, Maximum			100Vdc
Standard Resistance Range, Ohms			10 to 2.2 Meg
Standard Resistance Tolerance	G. Tol. ±2%	J Tol. ±5%	K Tol. ±10%
Temperature Coefficient of Resistance			100 to 300ppm/°C
Operating Temperature Range			-55°C to +125°C

Dielectric Table

Dielectric	Code	Characteristics	Values
SL	S	+350/-1,000/°C	10pF to 3,300pF
X7R	Х	±15% (-55 to +125°C)	680pF to 47nF, (50V: 100pF to 1μF)
Y5V	Υ	+22% to -82% (-30 to +85°C)	10pF to 1,500pF
CG (NPO)	CG	±30ppm/°C	10pF to 1,500pF


Specifications subject to change without notice.

Single-In-Line Conformal Coated Resistor/Capacitor Networks





Schematics

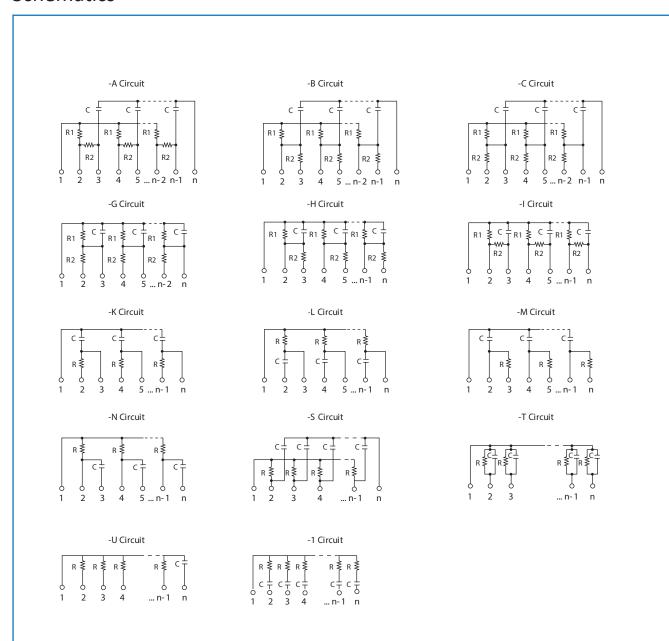


Specifications subject to change without notice.






Outline Dimensions (Inch/mm)

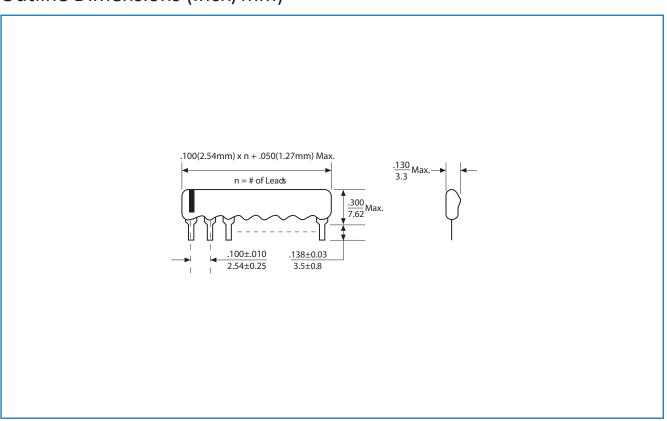

Typical Part Marking

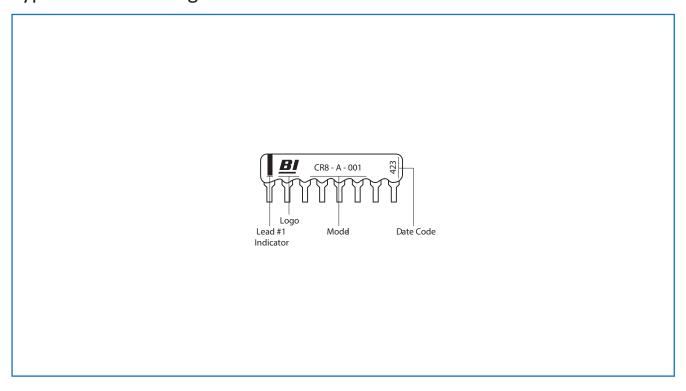


Single-In-Line Conformal Coated Resistor/Capacitor Networks





Ordering Information

Circuit 1

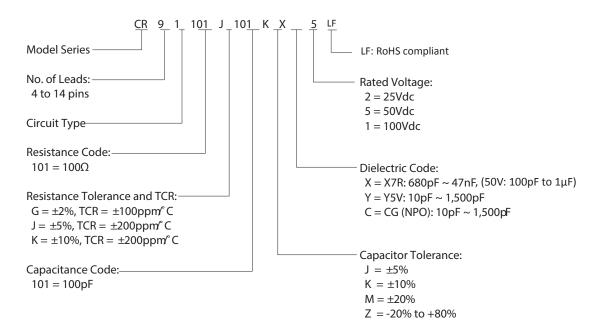

Custom Circuits A to U

