



High Voltage Planar Resistors

HVP Series

- Excellent reliability
- Ideally suited for medical applications
- Voltages up to 20kV
- Resistance values up to 10G
- Small footprint
- RoHS compliant
- Planar construction gives low inductance and capacitance

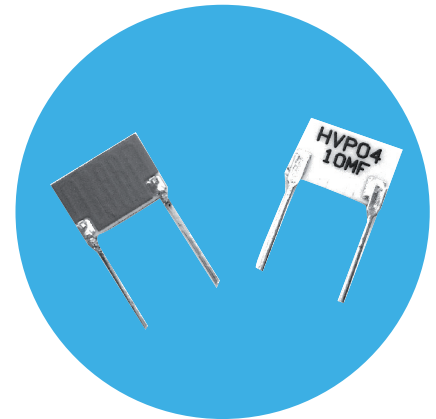

 All parts are Pb-free and comply with EU Directive 2011/65/EU (RoHS2)

Electrical Data


		HVP04	HVP06	HVP08	HVP10	HVP15	HVP20
Power rating at 70°C	watts	0.4	0.6	0.8	1	1.5	2
Resistance range	ohms	1K0 to 250M	1K5 to 1G0	2K0 to 1G0	3K0 to 2G0	4K0 to 5G0	5K0 to 10G
Limiting element voltage (dc or ac peak)	kV	2	5	7.5	10	15	20
TCR (20°C to 70°C)	ppm/°C	100			100, 50, 25		
Resistance tolerance	%	0.5, 1, 5			0.25, 0.5, 1, 5		
Values					E24 preferred		
Ambient temperature range	°C				-55 to 155		

Other resistance, tolerance and TCR values are available on request.

Size	TCR(ppm/°C)	Tolerance (%)	
		0.25	0.5, 1, 5
HVP04	100	-	1K0 to 250M
HVP06	25		1K5 to 500M
	50, 100	1K5 to 500M	1K5 to 1G0
HVP08	25		2K0 to 500M
	50, 100	2K0 to 500M	2K0 to 1G0
HVP10	25		3K0 to 1G0
	50, 100	3K0 to 1G0	3K0 to 2G0
HVP15	25		4K0 to 1G0
	50, 100	4K0 to 1G0	4K0 to 5G0
HVP20	25		5K0 to 1G0
	50, 100	5K0 to 1G0	5K0 to 10G

Physical Data

Dimensions (mm)					
Type	L ±0.75	H ±0.5	W ±0.5	P ±0.5	Wt Nom
HVP04	10.16	6.35	2	7.62	0.208g
HVP06	12.7	6.35	2	10.16	0.251g
HVP08	19.05	6.35	2	15.24	0.352g
HVP10	25.4	6.35	2	22.86	0.454g
HVP15	38.1	6.35	2	35.56	0.654g
HVP20	50.8	6.35	2	48.26	0.854g

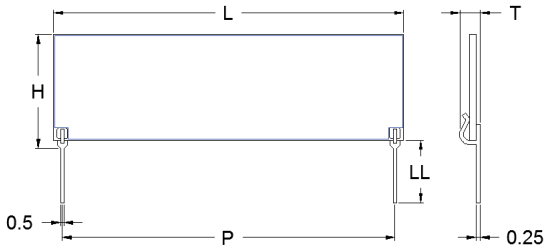

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

HVP Series

Construction

Conductor pads are printed to the rear and front faces of a 96% alumina substrate. A specially selected high voltage thick film resistor ink, based on a ruthenium oxide/glass system, is printed between the front face conductors and then covered in an overglaze before being protected with a special screen printed material which gives excellent high voltage and climatic performance.

Marking

Type, resistance value and tolerance are legend marked in black ink on the rear of the component. The resistance value conforms to IEC 62.

Solvent Resistance

The component protection and marking are resistant to all normal industrial cleaning solvents suitable for printed circuit boards

Terminations

Solder coated phosphor bronze leadframe terminations are solder dipped in SnAgCu and meet the following IEC requirements:

- IEC 68.2.21 – Strength
- IEC 115-1, Clause 4.17.3.2 – Solderability

Packaging

Packed in foam within a box. See Ordering Procedure for box quantities.

Performance Data

		Maximum	Typical
Load at rated power: 1000 hours at 70°C	ΔR%	1	0.1
Dry heat: 1000 hours at 155°C	ΔR%	1	0.1
Shelf life: 12 months at room temperature	ΔR%	0.3	<0.1
Derating from power at 70°C		Zero at 155°C	
Climatic	ΔR%	1	0.1
Climatic category -		-55/155/56	
Long term damp heat	ΔR%	1	0.1
Temperature rapid change	ΔR%	0.25	0.02
Resistance to solder heat	ΔR%	0.25	0.02
Voltage coefficient of resistance ppm/V	HVP04, HVP06, HVP08	-2.5	-1
	HVP10, HVP15, HVP20	-1.5	-0.5

Application Notes

Due to the high voltage which can appear between the resistor body and any adjacent metal part, resistors should be mounted at an adequate distance from other conducting parts.

Due to the possibility of surface condensation it is recommended that high voltages are not applied to resistors in areas of high humidity without the application of suitable moisture resistant lacquer

Design Flexibility

The experience of Welwyn engineers has been used to design this generation of high voltage planar resistors to be suitable for a majority of applications. However, should an application require particular consideration, Welwyn designers are able to provide advice and where applicable, to recommend a non-standard product. Special sizes, designs etc, can be prototyped at short notice.

Ordering Procedure

Example: HVP06 at 100 megohms, 50ppm/°C and 1% tolerance and packed in a box with a standard quantity of 160 pieces:

HVP	06	C	-	100M	F	B016
1	2	3		4	5	6

1	2	3		4	5		6		
Type	Size	TCR (Optional)		Value	Tolerance		Packing		
HVP	04		100ppm/°C	K = kilohms	J	5%	B02	HVP04	200/box
	06	C	50ppm/°C	M = megohms	F	1%	B016	HVP06	160/box
	08	D	25ppm/°C	G= gigohms	D	0.5%	B012	HVP08	120/box
	10				C	0.25%	B008	HVP10	80/box
	15						B006	HVP15	60/box
	20						B004	HVP20	40/box

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.