


MATERIALS AND FINISHES

2.92 PLUG:
SEE SD-73252-011

CABLE:
TEMP-FLEX AIR CORE 086-2201

LABEL:
BRADY PERMASLEEVE

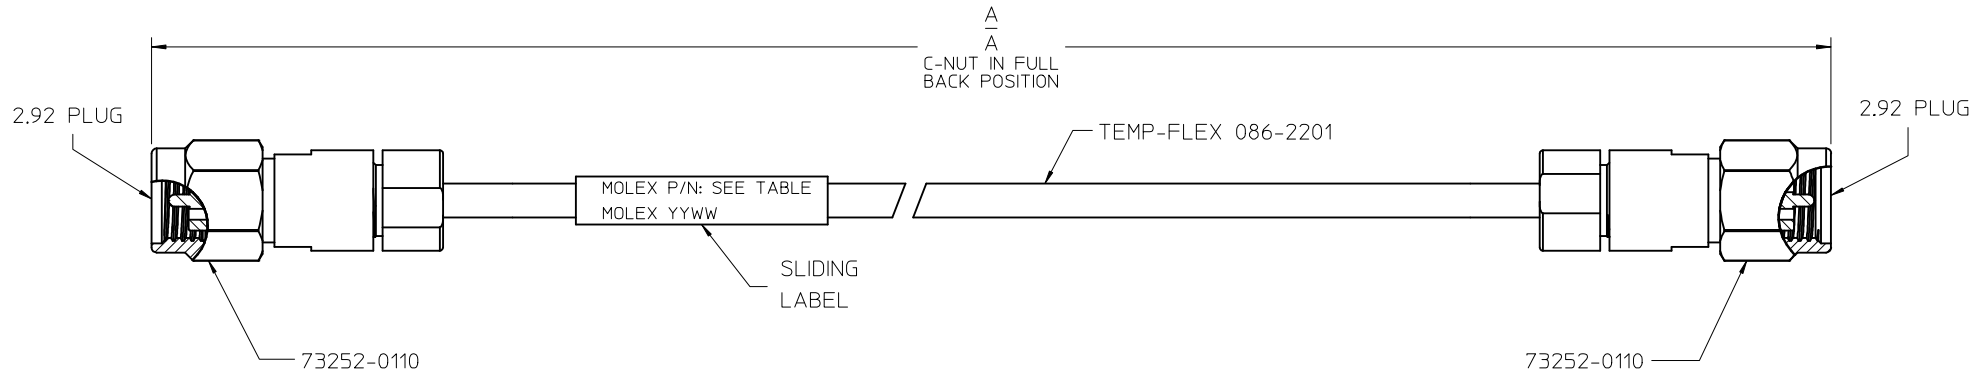

89762-1325	120.0	3048	16.0
89762-1324	18.00	457.2	2.40
89762-1323	15.00	381.0	2.00
89762-1322	12.00	304.8	1.60
89762-1321	9.00	228.6	1.20
89762-1320	6.00	152.4	0.90
PART NO.	IN	MM	INSERTION LOSS MAX TO 40 GHz (dB)
A			

VSWR 1.40 MAX TO 40 GHz

MIL-STD-348B, FIG. 323.1		INTERFACE	
SPECIFICATION		DESCRIPTION	
DIMENSION STYLE MM/IN		SCALE INCH	DESIGN UNITS INCH
DRAWN BY AROBERTSON		DATE 2013/03/20	TITLE 2.92 PLUG ST X2 ON TEMP-FLEX 086-2201 CABLE CA-292/292, EWR-4902
CHECKED BY SSS		DATE 2013/03/20	molex
APPROVED BY JWIENER		DATE 2013/03/27	
MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-89762-132	SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

CHG: UPDATE
INSERTION LOSS
AND MIL-STD SPECS

EC NO: URF2016-0037	2015/07/21
DRW: BOMALLEY	2015/07/21
CHKD: LLM	2015/07/21
APPR: AROBERTSON	2015/07/22
REV	DESCRIPTION
A2	

QUALITY SYMBOLS	=0
	=0
	=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm
	INCH
4 PLACES	± .005
3 PLACES	± .005
2 PLACES	± .005
1 PLACE	± .005
0 PLACE	± .005
ANGULAR ± 2°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	