


MATERIALS AND FINISHES

2.92 PLUG:
SEE SD-73252-014

CABLE:
TEMP-FLEX 086SC-2401

LABEL:
BRADY PERMASLEEVE

SHRINK TUBE:
VERSAFIT OR EQUIVALENT

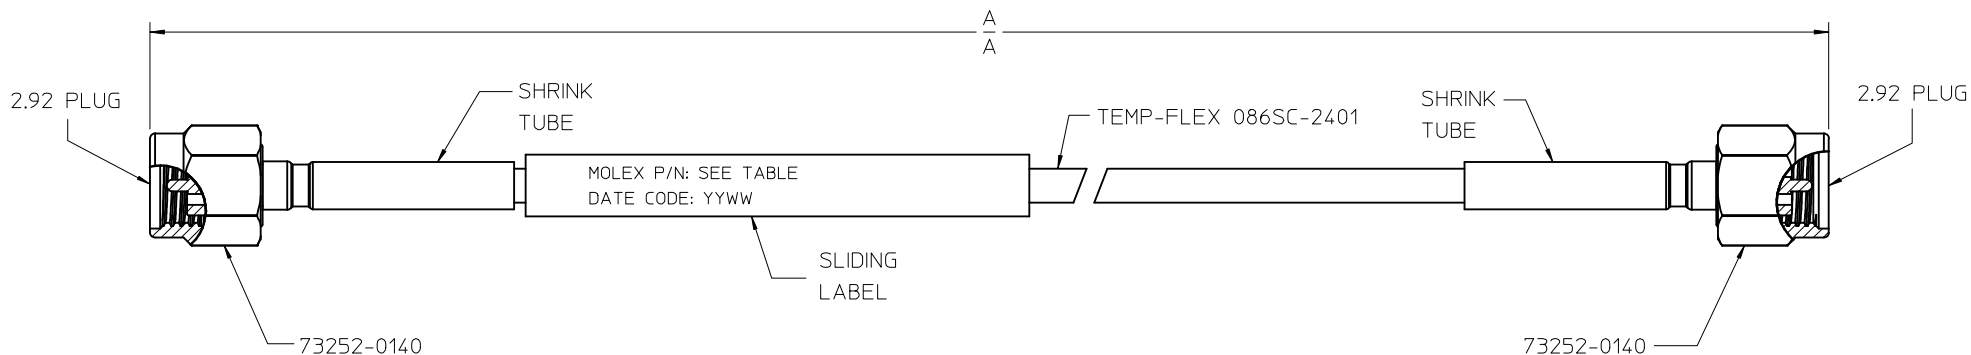

89762-1545	120.0	3048	16.50
89762-1544	18.00	457.2	2.56
89762-1543	15.00	381.0	2.15
89762-1542	12.00	304.8	1.74
89762-1541	9.00	228.6	1.33
89762-1540	6.00	152.4	0.92
PART NO.	IN	MM	
A			INSERTION LOSS MAX TO 40 GHz (dB)

VSWR 1.50 MAX TO 40 GHz

MIL-STD-348A, FIG. 323.1		INTERFACE	
SPECIFICATION		DESCRIPTION	
DIMENSION STYLE MM/IN		SCALE INCH	DESIGN UNITS INCH
DRAWN BY AROBERTSON		DATE 2013/05/07	TITLE 2.92 PLUG ST X2 ON TEMP-FLEX 086SC-2401 CA-292/292, EWR-5144
CHECKED BY SSS		DATE 2013/05/07	molex
APPROVED BY JWIENER		DATE 2013/05/08	
MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-89762-154	SHEET NO. 1 OF 1
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

CHG: UPDATED VIEW OF REVISED 2.92. EC NO: URF2014-0551 DRWN: AROBERTSON 2014/03/27 CHKD: SSS 2014/03/28 APPR: WSP/INK 2014/03/28	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)
	▽=0	mm INCH
	▽=0	4 PLACES ± --- ± ---
	▽=0	3 PLACES ± --- ± ---
		2 PLACES ± --- ± ---
		1 PLACE ± --- ± ---
		0 PLACE ± --- ± ---
		ANGULAR ± 2°
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS