


7 6 5 4 3 2 1

E

E

View on mating side

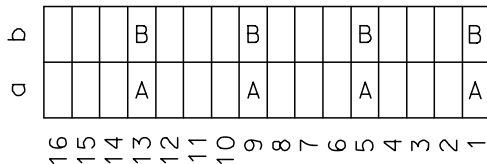

A = 4 standard contacts L=3
 B = 4 standard contacts L=3
 S = 8 total number of contacts

D

D

Marking	Standard
Performance level	G2/0 = Contact area level2 / Termination tin
Flux proof	no
Fixing clip	YES
Dimensions	SDA-85001-0002 sht.1
Technical Data	PS-85003-0001

C

C

B	G2/0	b1, b5, b9, b13
A	G2/0	a1, a5, a9, a13
Contact symbol	Perform. level	Contact position number

B

B

A

A

EC NO: 12005-0303 DRWN: SIVAKUMAR 2005/03/01 CHKD: SSUDHIR 2005/03/02 APPR: KPRASAD 2005/03/03 DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0 □=0	mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.1 ± --- 1 PLACE ± 0.2 ± --- ANGULAR ± 1/2°	MM ONLY	1:1	METRIC	DRAWN BY: SIVAKUMA DATE: 2004/12/09 CHECKED BY: SSUDHIR DATE: 2004/12/09 APPROVED BY: SSUDHIR DATE: 2004/12/09 MATERIAL NO. 85001-9011
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				TITLE: 32 POS. MALE DIN CONNECTOR DIN 41612 STYLE B/2 MOLEX INCORPORATED DOCUMENT NO. SD-85001-9011 SHEET NO. 1 OF 1
				SIZE A/4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

6

5

4

3

2

1