
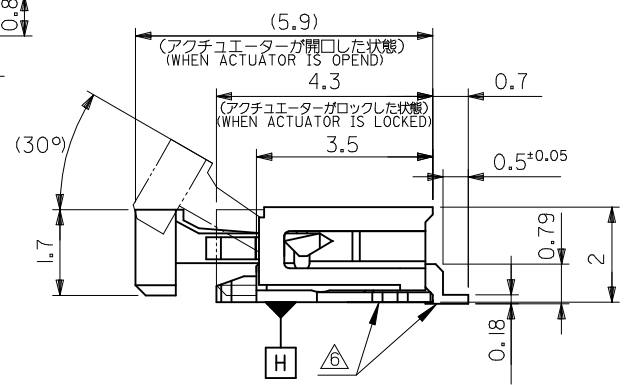


VIEW K  
(金具部投影図)  
(DETAIL OF FITTING NAIL)

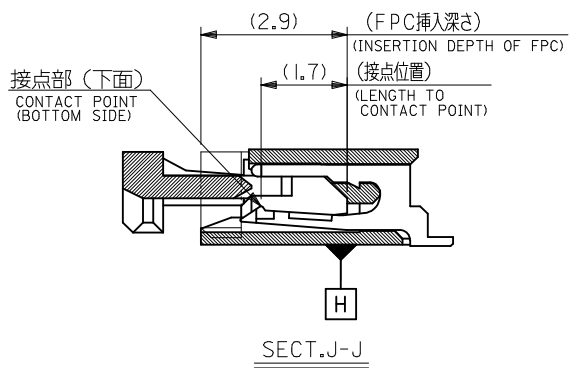


注記(NOTES)

- 材質 MATERIAL
    - ハウジング: ポリアミド (PA), ガラス充填, 白色, UL94V-0
    - HOUSING: POLYAMIDE, GLASS FILLED, WHITE, UL94V-0
    - アクチュエータ: ポリフェニレンサルファイド (PPS), ガラス充填, 茶色, UL94V-0
    - ACTUATOR: POLYPHENYLENE SULFIDE, GLASS FILLED, BROWN, UL94V-0
    - ターミナル: リン青銅 (t = 0.2)
    - TERMINAL: PHOSPHOR BRONZE (t = 0.2)
    - 金具: リン青銅 (t = 0.2)
    - NAIL: PHOSPHOR BRONZE (t = 0.2)
  - メッキ仕様 PLATING
    - ターミナル
      - 鍍銀: スマスマメッキ (1.0μm以上)
      - TIN SILVER BISMUTH PLATING (1.0MICROMETER MINIMUM)
      - 下地メッキ: ニッケルメッキ (1.0μm以上)
      - UNDER PLATING: NICKEL PLATING (1.0MICROMETER MINIMUM)
    - 金具
      - 鍍銀メッキ (1.0μm以上)
      - TIN PLATING (1.0MICROMETER MINIMUM)
      - 下地メッキ: ニッケルメッキ (1.0μm以上)
      - UNDER PLATING: NICKEL PLATING (1.0MICROMETER MINIMUM)
    - NAIL
      - 鍍銀メッキ (1.0μm以上)
      - TIN PLATING (1.0MICROMETER MINIMUM)
      - 下地メッキ: ニッケルメッキ (1.0μm以上)
      - UNDER PLATING: NICKEL PLATING (1.0MICROMETER MINIMUM)
- △ R0.3はFPCの導体部にかからないこと  
R0.3 MUST NOT BE OVERLAPED TO PATTERN OF FPC.
- △ 偶数極に適用  
APPLY FOR EVEN CIRCUIT.
- △ パターン剥離止め金具  
FITTING NAIL FOR PREVENTION OF PEELING OF P.W.B. PATTERN.
- △ ソルダータール半田付け面のスレ量, 及び金具半田付け面のスレ量は,  
基準面Hに対して上方向に0.1MAXIMUM, 下方向に0.15MAXIMUMとする。  
MISALIGNMENT OF SOLDER TAILS AND FITTING NAILS FROM DATUM-H  
UPPER DIRECTION: 0.1MAXIMUM  
LOWER DIRECTION: 0.15MAXIMUM
- エンボスマーク埋め時は, アクチュエーターがロックした状態になります。  
IN THE PACKAGE, ACTUATOR OF PART NO.52746-\*\*\*22 SHOULD BE LOCKED.
  - ELV及びRoHS適合品  
ELV AND RoHS COMPLIANT

16.1	14.3	10.65	9.5	52746-2033	20
15.6	13.8	10.15	9	52746-1933	19
15.1	13.3	9.65	8.5	52746-1833	18
14.6	12.8	9.15	8	52746-1733	17
14.1	12.3	8.65	7.5	52746-1633	16
13.6	11.8	8.15	7	52746-1533	15
13.1	11.3	7.65	6.5	52746-1433	14
12.6	10.8	7.15	6	52746-1333	13
12.1	10.3	6.65	5.5	52746-1233	12
11.6	9.8	6.15	5	52746-1133	11
11.1	9.3	5.65	4.5	52746-1033	10
10.6	8.8	5.15	4	52746-0933	9
10.1	8.3	4.65	3.5	52746-0833	8
9.6	7.8	4.15	3	52746-0733	7
9.1	7.3	3.65	2.5	52746-0633	6
8.1	6.3	2.65	1.5	52746-0433	4
D	C	B	(A)	EMBOSSED PACKAGE ORDER No. オート番号	極数 CKT.


CONNECTOR SERIES NO. : 52746-\*\*\*22

REVISED EC NO: J2014-0096 DRW: AISHI 2013/07/18 CHK: KAKAHASHI 2013/07/18 APPR: YNOGAWA 2013/08/19	DESCRIPTION 10 UNDER ±0.2 10 OVER 30 UNDER ±0.25 30 OVER ±0.3 ANGULAR ±3 ° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM ONLY	SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		DRAWN BY KNAGUMO	DATE 2012/08/31	TITLE 0.5MM FPC CONN ZIF R/A HOUSING ASSY (BOTTOM CONTACT)			
		CHECKED BY KTAKAHASHI	DATE 2012/09/06	MATERIAL NO. SEE CHART			
		APPROVED BY KMORIKAWA	DATE 2013/04/16	DOCUMENT NO. SD-52746-031			
SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

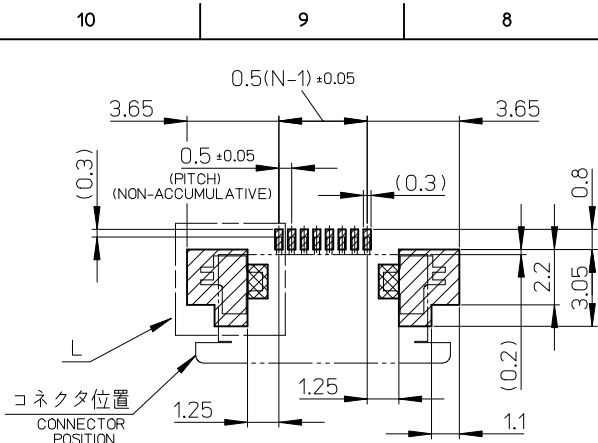


推奨基板レイアウト (マウント面)  
 RECOMMENDED P.C. BOARD PATTERN DIMENSION (REF.) (MOUNTING SIDE)


マスク厚 : 100 μm  
 マスク開口率 : 100%  
 SCREEN THICKNESS : 100 μm  
 SCREEN OPEN RATIO : 100%

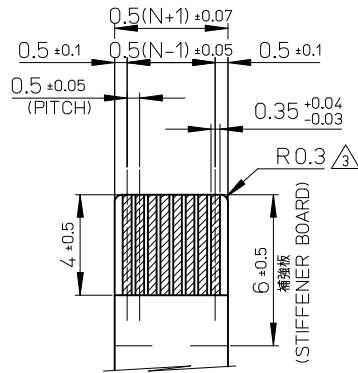

適合半田めっきFPC推奨寸法  
 APPLICABLE FPC OF TIN-LEAD PLATING RECOMMENDED DIMENSION  
 仕上がり厚さ : 0.3±0.03  
 THICKNESS: 0.3+0.03/-0.03




適合半田めっきFFC推奨寸法  
 APPLICABLE FFC OF TIN-LEAD PLATING RECOMMENDED DIMENSION  
 仕上がり厚さ : 0.3±0.03  
 THICKNESS: 0.3+0.03/-0.03

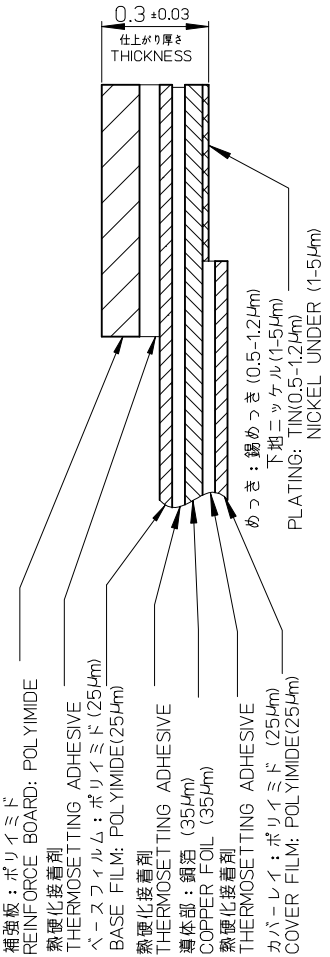

FPC構成推奨仕様  
 STRUCTURE OF FPC

FPC/FFCについて ABOUT FPC/FFC  
 打ち抜き方向は導体側から補強板側を推奨します。  
 導体部については軟烙銅35 μmまたは50 μmを推奨します。  
 RECOMMENDED PUNCHING DIRECTION:  
 FROM CONDUCTOR SIDE TO STIFFENER SIDE  
 RECOMMENDED CONDUCTOR SPEC:  
 SOFT COPPER FOIL  
 RECOMMENDED CONDUCTOR THICKNESS:  
 35 MICROMETER OR 50 MICROMETER

FPCについて ABOUT FPC  
 補強フィルム材質はポリイミドを推奨します。ベースフィルムは25 μmを推奨します。  
 接着剤は熱硬化接着剤を推奨します。  
 尚、接着剤の接点部への付着は導通不良の原因になりますので、  
 染み出しが無い様、お願い致します。  
 RECOMMENDED STIFFENER MATERIAL:  
 POLYIMIDE  
 RECOMMENDED BASE FILM THICKNESS:  
 25 MICROMETER  
 RECOMMENDED ADHESIVE:  
 THERMOSETTING ADHESIVE  
 NOTE: PLEASE PUT APPROPRIATE  
 AMOUNT OF ADHESIVE ON ADHEREND  
 BECAUSE THERE IS A POSSIBILITY  
 THAT THE EXTRA ADHESIVE CAUSES  
 THE DEFECT IN ELECTRICAL CONTINUITY.

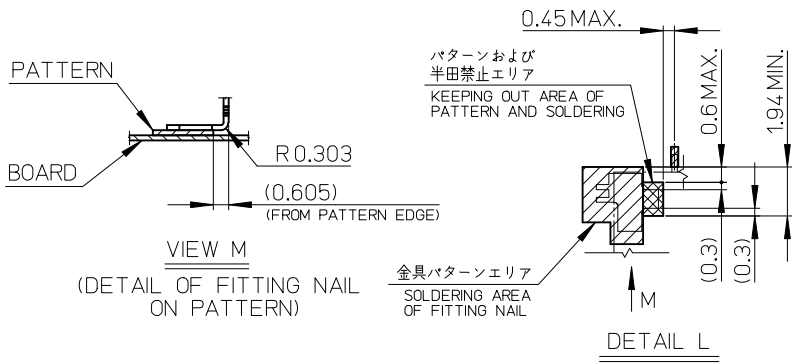



SEE SHEET 1 OF 2 EC NO: J2014-0096 DRW: AISHI 2013/07/18 CHK: KAKAHASHI 2013/07/18 APPR: YNOGAWA 2013/08/19	DESCRIPTION REV: A	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	DRAWN BY KNAGUMO	DATE 2012/08/31	TITLE 0.5MM FPC CONN ZIF R/A HOUSING ASSY (BOTTOM CONTACT)				
		10 OVER 30 UNDER	± ---	CHECKED BY KTAKAHASHI	DATE 2012/09/06					
		30 OVER	± ---	APPROVED BY KMORIKAWA	DATE 2013/04/16					
ANGULAR ± --- °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-52746-031		SHEET NO. 2 OF 2		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

注記 NOTES

1. 製品番号52746-\*\*22の梱包状態はアクチュエータがロックした状態とする。  
 詳細寸法については図面SD-52746-031を参照下さい。  
 IN THE PACKAGE, ACTUATOR OF PART NO.52746-\*\*22 SHOULD BE LOCKED  
 DETAIL DIMENSIONS, SEE SD-52746-031

2. 梱包数量：1000個/リール  
 NUMBER OF CONNECTORS:1000PCS/REEL


3. リードテープ長さ LEAD TAPE LENGTH

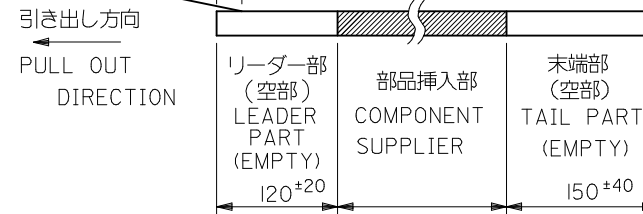



4. トップテープの剥離強度については、IEC60286-3に準拠  
 TOP TAPE PEEL FORCE IS DEFINED BY IEC60286-3.

5. 材料 キャリアテープ：ポリプロピレン (PP)  
 トップテープ：PET, PE, PEF  
 リール：ポリスチレン (PS) <リサイクル材を含む>  
 MATERIAL CARRIER TAPE:POLYPROPYLENE  
 TOP TAPE:PET,PE,PEF  
 REEL:POLYSTYREN(PS)  
 <RECYCLE MATERIAL CONTAINED>

6. ELV及びRoHS適合品  
 ELV AND RoHS COMPLIANT

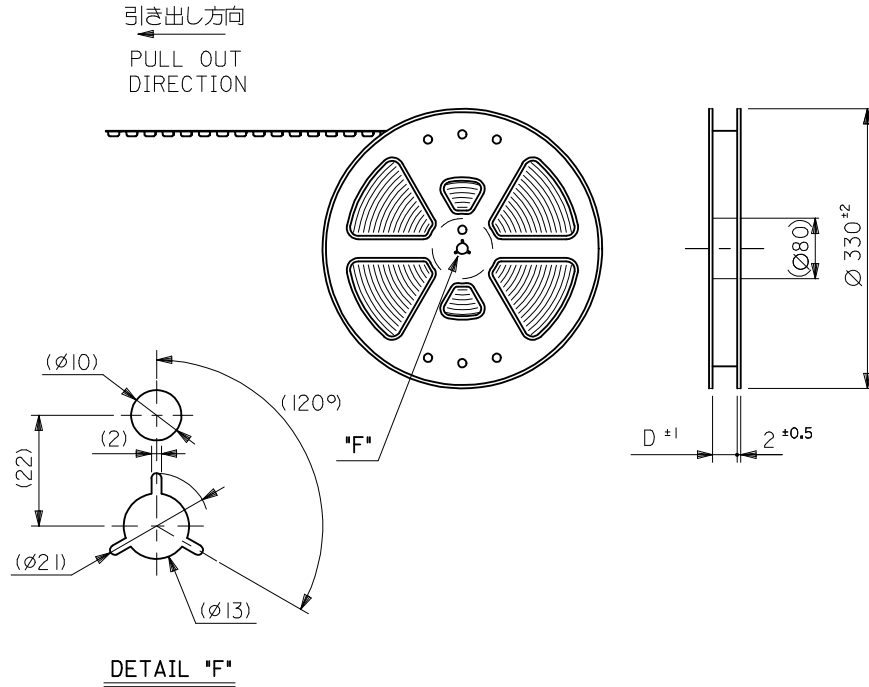


RELEASED EC NO: J2013-1133 DRWN:KNAGUMO 2012/09/05 CHKD:KTAKAHASHI 2012/09/06 APP:KMORIKAWA 2013/04/16	DESCRIPTION REV 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± ---	DRAWN BY KNAGUMO	DATE 2012/09/05	TITLE EMBOSS TAPE PACKAGED FOR 0.5MM FPC CONN ZIF R/A HOUSING ASSY <b>molex</b>				
		10 OVER 30 UNDER	± ---	CHECKED BY KTAKAHASHI	DATE 2012/09/06					
		30 OVER	± ---	APPROVED BY KMORIKAWA	DATE 2013/04/16					
ANGULAR ± --- °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-52746-032		SHEET NO. 1 OF 3		
SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

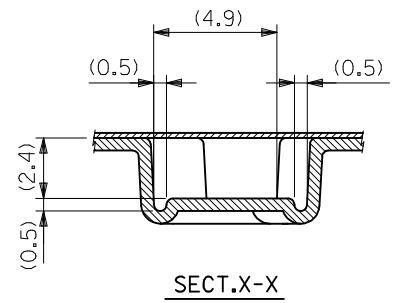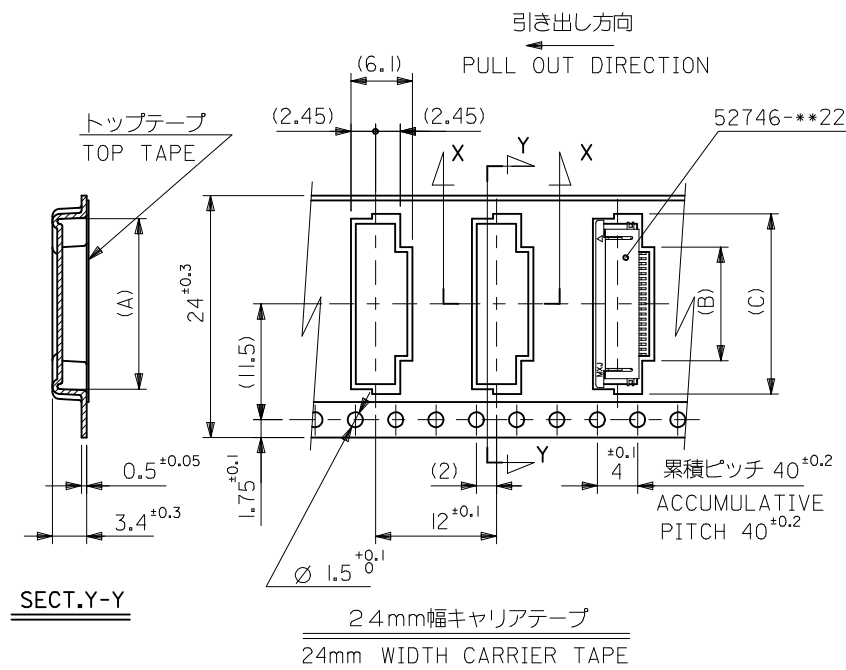

24	25.5	17.4	10.8	16.4	52746-2033	20
		16.9	10.3	15.9	-1933	19
		16.4	9.8	15.4	-1833	18
		15.9	9.3	14.9	-1733	17
		15.4	8.8	14.4	-1633	16
		14.9	8.3	13.9	-1533	15
		14.4	7.8	13.4	-1433	14
		13.9	7.3	12.9	-1333	13
		13.4	6.8	12.4	-1233	12
		12.9	6.3	11.9	-1133	11
		12.4	5.8	11.4	-1033	10
		11.9	5.3	10.9	-0933	9
11.4	4.8	10.4	-0833	8		
10.9	4.3	9.9	-0733	7		
10.4	3.8	9.4	52746-0633	6		
キャリアテープ幅 CARRIER TAPE WIDTH	D	(C)	(B)	(A)	MATERIAL NO.	極数 CIRCUIT

SEE SHEET 1 OF 3 EC NO.: J2013-1133 DRWN:KNAGUMO 2012/09/05 CHKD:KAKAHASHI 2012/09/06 APPR:KMORIKAWA 2013/04/16	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM ONLY	SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	10 UNDER ± ---	DRAWN BY KNAGUMO	DATE 2012/09/05	TITLE EMBOSS TAPE PACKAGED FOR 0.5MM FPC CONN ZIF R/A HOUSING ASSY	
	10 OVER 30 UNDER ± ---	CHECKED BY KAKAHASHI	DATE 2012/09/06		
	30 OVER ± ---	APPROVED BY KMORIKAWA	DATE 2013/04/16		
	ANGULAR ± --- °	MATERIAL NO.	SEE CHART	DOCUMENT NO. SD-52746-032	SHEET NO. 2 OF 3
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

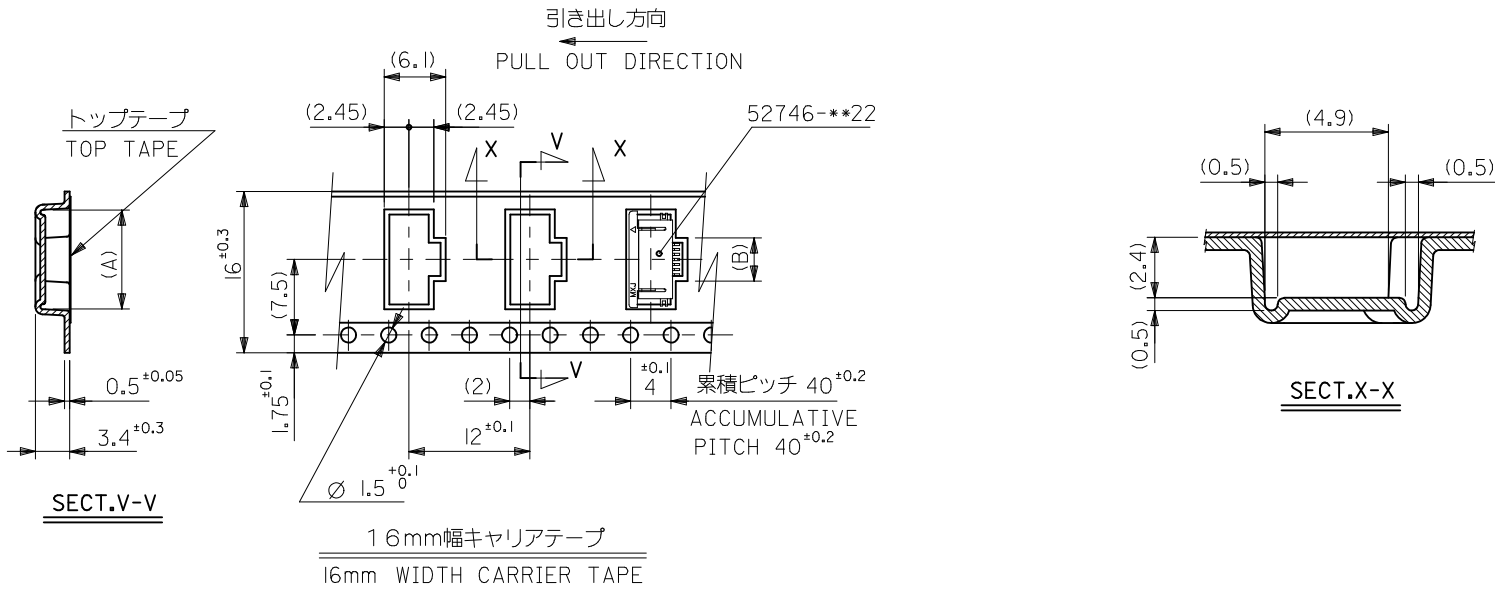

16	17.5	2.8	8.4	52746-0433	4
キャリアテープ幅 CARRIER TAPE WIDTH	D	(B)	(A)	MATERIAL NO.	極数 CIRCUIT

SEE SHEET 1 OF 3 EC NO.: J2013-1133 DRW:KNAGUMO 2012/09/05 CHKD:KTAKAHASHI 2012/09/06 APPR:KMORIKAWA 2013/04/16	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
	10 UNDER	±---	DRAWN BY	DATE	TITLE					
	10 OVER 30 UNDER	±---	KNAGUMO	2012/09/05	EMBOSS TAPE PACKAGED FOR 0.5MM FPC CONN ZIF R/A HOUSING ASSY					
	30 OVER	±---	CHECKED BY	DATE	<b>molex</b> DOCUMENT NO. SD-52746-032 SHEET NO. 3 OF 3					
	ANGULAR	±---°	KTAKAHASHI	2012/09/06						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY	DATE	SEE CHART						
		KMORIKAWA	2013/04/16	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						