

FACTORY I.D. CIRCUIT NUMBERS

CIRCUIT I.D. NUMBERS

.87
(22.1)



.63
(16.1)

1.02±.03
(25.9±0.8)

OPTIONAL LOCKING RAMPS

.69
(17.6)



OPTIONAL MOUNTING EAR (PREBENT EAR SHOWN)

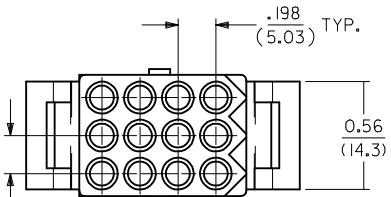

.198
(5.03) TYP.

0.56
(14.3)

RECEPTACLE



FACTORY I.D.

CIRCUIT NUMBERS

CIRCUIT I.D. NUMBERS


.84
(21.4)

.63
(16.1)

.98±.03
(24.9±0.8)

0.42
(10.7)

OPTIONAL MOUNTING EAR (PREBENT EAR SHOWN)




.98
(24.8)

.74
(18.8)

0.56
(14.3)

.198
(5.03) TYP.

PLUG



| | | | | | | |
|--|---------------------|--|--------------------------|---|----------------------|---|
| OBSOLETE 1360-R1* IEC NO: UCP2015-1850 DRWN:JDOX 2014/11/03 CHKD:HK/PPER 2014/11/03 APPR:FSMITH 2014/11/13 | QUALITY SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED) | DIMENSION STYLE IN/MM | SCALE 2:1 | DESIGN UNITS INCH | THIRD ANGLE PROJECTION |
| | ▽=0 | 4 PLACES ± --- ± --- | mm INCH | DRAWN BY KBW | DATE 3/1/89 | TITLE .093/(2.36) HOUSINGS PLUG AND RECEPTACLE 12 CKT, .198/(5.03)CTR. |
| | ▽=0 | 3 PLACES ± --- ±.010 | | CHECKED BY RW | DATE 3/1/89 | molex DOCUMENT NO. SD-1360-* SHEET NO. 1 OF 2 |
| | ▽=0 | 2 PLACES ± 0.25 ±.014 | | APPROVED BY FSMITH | DATE 2014/11/13 | |
| | ▽=0 | 1 PLACE ± 0.35 ± --- | | | | |
| 0 | 0 PLACE ± --- ± --- | ANGULAR ± 2° | MATERIAL NO. | | | |
| 0 | | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | SEE CHART | | | |
| AE2 | | | SIZE | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | |

