
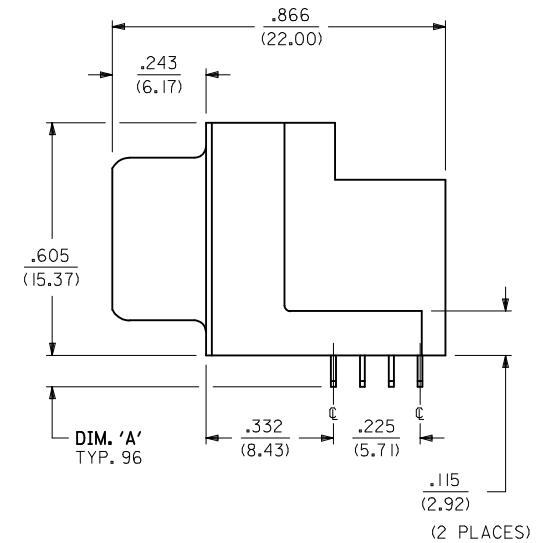


**NOTES:**

- 1) CONNECTOR MATERIALS:  
HOUSING, INSERT-MOLDED STICKS, AND RIGHT ANGLE BRACKET ARE MADE OF GLASS FILLED LCP, UL 94V-0, COLOR IS BLACK. TERMINALS ARE .013/(0.33) THICK BERYLLIUM COPPER; TERMINAL PLATING IS 30 MICROINCHES/(0.76 MICRO METERS) MINIMUM GOLD IN CONTACT AREA, AND 100 MICROINCHES/(2.54 MICROMETERS) MINIMUM TIN ON P.C. TAILS, OVER NICKEL UNDER PLATE OVERALL.
- 2) FRONT SHELL:  
DRAW QUALITY STEEL, .016/(0.4) THICK;  
PLATING: 150-250 MICROINCHES/(3.81-6.35 MICROMETERS) BRIGHT NICKEL OVER 50 MICROINCHES/(1.27 MICROMETERS) MAXIMUM COPPER OVERALL.
- 3) THREADED INSERT (2 PLACES):  
BRASS, M3 X 0.5 (METRIC) INTERNAL THREAD.
- 4) ALL DIMENSIONS ARE SHOWN FOR REFERENCE ONLY UNLESS SPECIFIED OTHERWISE.
- 5) THIS CONNECTOR CONFORMS TO PRODUCT SPECIFICATION PS-70660.
- 6) PART COMPLIES WITH CLASS B OF COSMETIC SPECIFICATION PS-45499-002


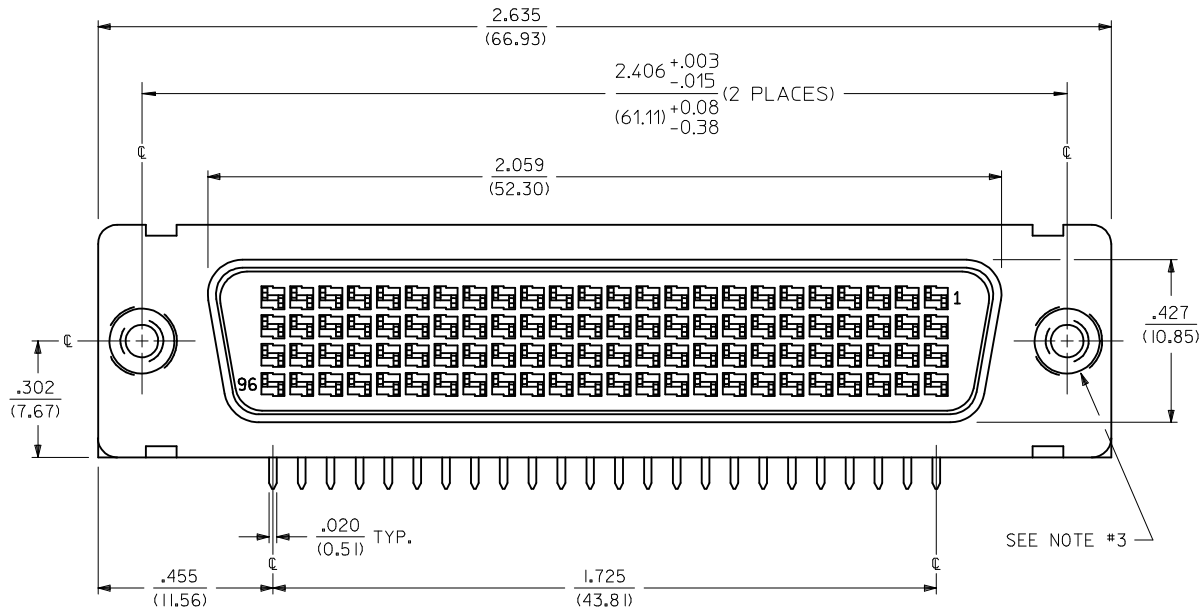


051-26-0003	70660-0002	.135 (3.43)
051-26-0000	70660-0001	.092 (2.34)
PART NUMBER	ENGINEERING NUMBER	DIM. 'A'

<b>MODIFY TOLERANCE</b> EC NO: UCP2009-2682 DRWING:MORGAN 2009/05/13 CHKD:SDANNELLEY 2009/05/14 APPR:SMILLER 2009/05/14	QUALITY SYMBOLS
	▼=0 ▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE
	IN/MM
4 PLACES ± --- ± ---	DRAWN BY DATE
3 PLACES ± --- ± .010	GLT 1991/09/30
2 PLACES ± 0.25 ± ---	CHECKED BY DATE
1 PLACE ± --- ± ---	CAB 1991/09/30
ANGULAR ±1/2°	APPROVED BY DATE
	CAB 1991/09/30
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO.
	SEE TABLE
	SIZE
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
INCH	INCH	
TITLE		
LFH, .075 PITCH, 96		
CIRCUIT, RIGHT ANGLE I/O		
RECEPTACLE CONNECTOR		
MOLEX MOLEX INCORPORATED		
DOCUMENT NO.	SHEET NO.	
SDA-70660-0001	1 OF 2	

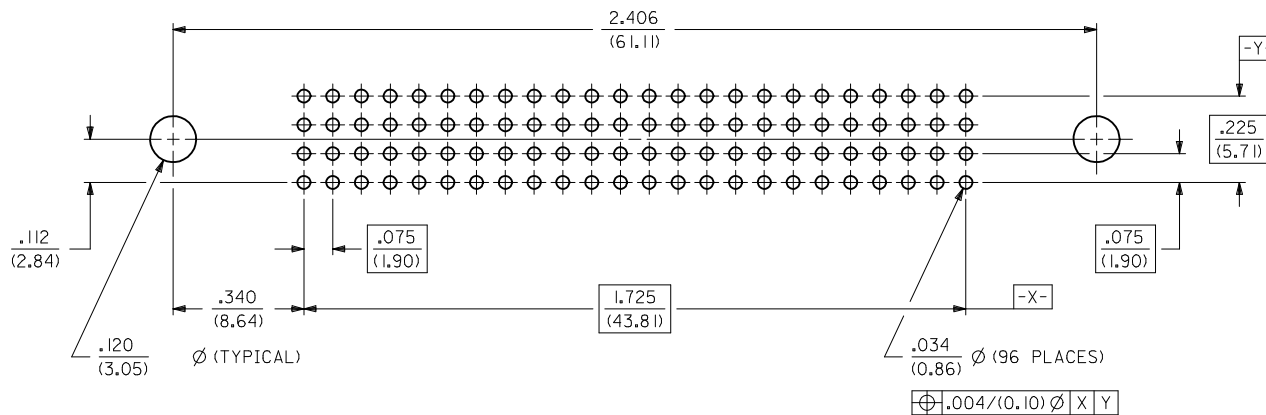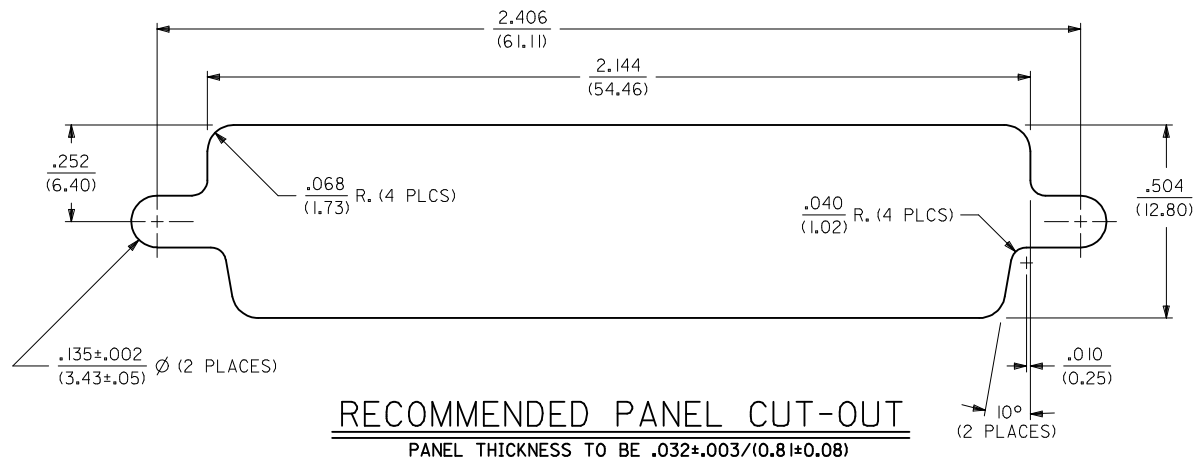

RECOMMENDED PCB AND MTG HOLE LAYOUT

SEE SHEET 1 EC NO: UCP2009-2682 DRWN:DMORGAN 2009/05/13 CHKD:SDANNELLEY 2009/05/14 APPR:SMILLER 2009/05/14	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES ±</td> <td>---</td> <td>±---</td> </tr> <tr> <td>3 PLACES ±</td> <td>---</td> <td>±.003</td> </tr> <tr> <td>2 PLACES ±</td> <td>0.08</td> <td>±---</td> </tr> <tr> <td>1 PLACE ±</td> <td>---</td> <td>±---</td> </tr> </table>		mm	INCH	4 PLACES ±	---	±---	3 PLACES ±	---	±.003	2 PLACES ±	0.08	±---	1 PLACE ±	---	±---	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
			mm	INCH																	
	4 PLACES ±		---	±---																	
	3 PLACES ±		---	±.003																	
2 PLACES ±	0.08	±---																			
1 PLACE ±	---	±---																			
REV	DESCRIPTION	ANGULAR ± 1°	IN/MM	4:1	INCH	☉															
H		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	DRAWN BY DATE GLT 1991/09/30 CHECKED BY DATE CAB 1991/09/30 APPROVED BY DATE CAB 1991/09/30	TITLE <b>LFH, .075 PITCH, 96 CIRCUIT, RIGHT ANGLE I/O RECEPTACLE CONNECTOR</b>																	
			MATERIAL NO. <b>SEE SHEET #1</b> SIZE C	DOCUMENT NO. <b>SDA-70660-0001</b> SHEET NO. <b>2 OF 2</b>																	