


注記
NOTES

1. 各部の反りは0.5最大。
WARPING : 0.5 MAX.
2. サークットNO.はNO."1"のみ表示。
CIRCUIT NO. : 1 ONLY.
3. ELV及びRoHS適合品。
ELV AND RoHS COMPLIANT.

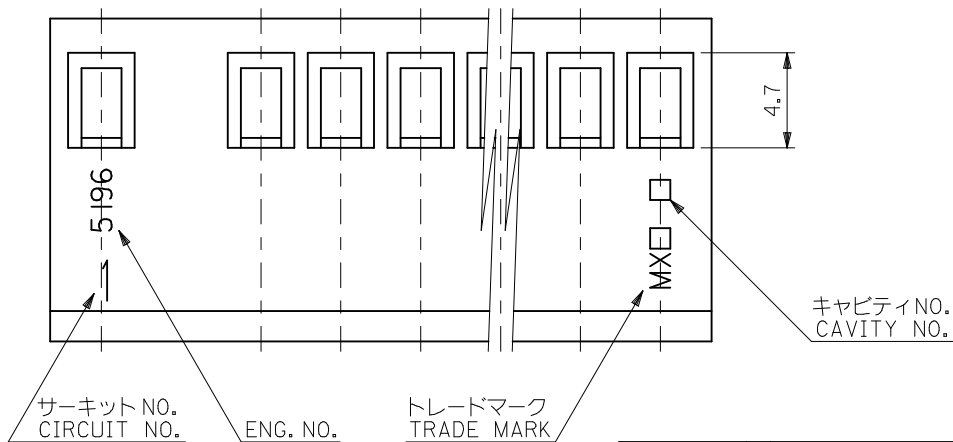

52.62	47.52	09-50-1123	5196-12	12
48.66	43.56	↑ -1113	↑ -11	11
44.7	39.6	-1103	-10	10
40.74	35.64	-1093	-09	9
36.78	31.68	-1083	-08	8
32.82	27.72	-1073	-07	7
28.86	23.76	-1063	-06	6
24.9	19.8	-1053	-05	5
20.94	15.84	-1043	-04	4
16.98	11.88	↓ -1033	↓ -03	3
13.02	7.92	09-50-1023	5196-02	2
B		A	EDP. NO.	ENG. NO.

REVISED EC NO: J2009-2074 DRWN: CARIZONO 2009/04/15 CHKD: T. HIRUYAMA 2009/04/16 APPR: NUKITA 2009/04/16	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	10 UNDER	±0.2	DRAWN BY M. FUJIKURA	DATE 1992/09/07	TITLE SPOX 7.92/3.96 REC HSG		
	10 OVER 30 UNDER	±0.25	CHECKED BY H. HIRAMOTO	DATE 1992/09/08	MATERIAL NO. SD-5196-001		
	30 OVER	±0.3	APPROVED BY M. FUKUSHIMA	DATE 1992/09/08	SHEET NO. 1 OF 1		
	ANGULAR ±3 °	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				MATERIAL NO. DOCUMENT NO.			

材料 MATERIAL
ナイロン66, UL94V-2
色: オフホワイト
NYLON66, UL94V-2
COLOR: OFFWHITE