



PART NUMBER	ENGINEERING NO.	LENGTH ± TOLERANCE
1300480114	E11A06010M010	3' 3" +2.19'/-0" [ 1M +55.6/-0 mm ]
1300480116	E11A06010M050	16' 4" +6.5'/-0" [ 5M +165.0/-0 mm ]

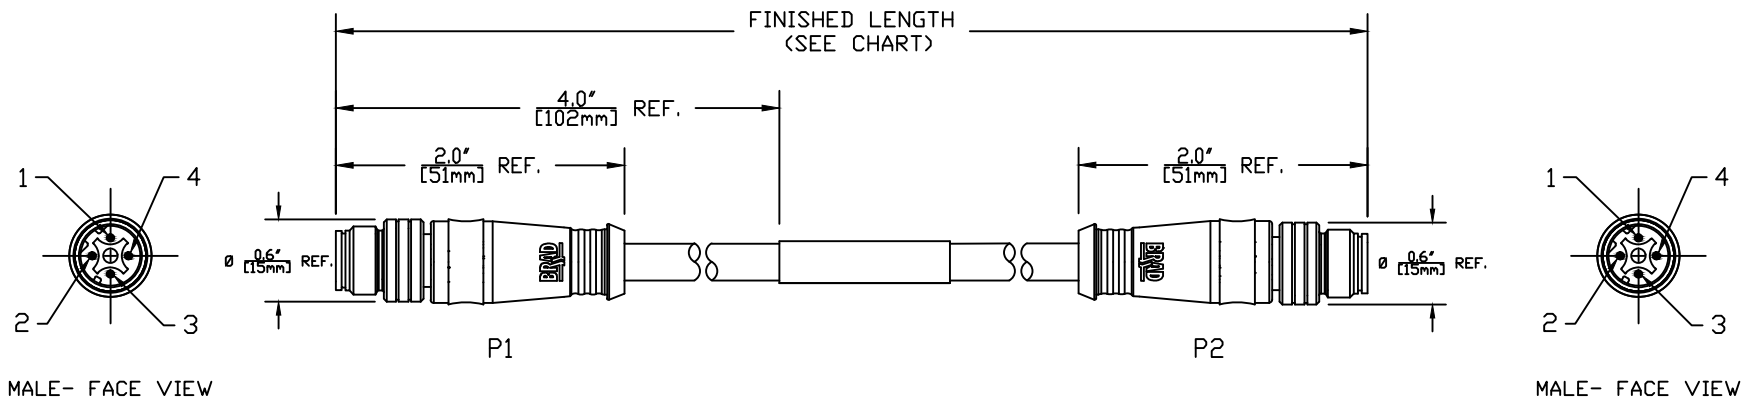

WIRING DIAGRAM

SPECIFICATION DATA

COMPONENT	MATERIAL	FINISH
LABEL	NYLON	BLACK/YELLOW
COUPLER	BRASS	NICKEL PLATED
CONTACT	COPPER ALLOY	Au OVER Ni
INSERT	PUR	BLACK
OVERMOLD	PUR	BLACK
CABLE-CAT5E	PUR	TEAL
VOLTAGE RATING:	30V	
AMPERAGE RATING:	1.5A	
PROTECTION CLASS:	IP 67	
OPERATING TEMPERATURE:	-20°C / 75°C	

RELEASE	QUALITY SYMBOLS
EC NO: IFC2014-0099	▽=0
DRWN: GGUSTAFS 12/27/13	▽C=0
CHKD: BARDEN	
APPR: BWOODMAN	
REV	
A	

DESCRIPTION	
GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ±---	±---
3 PLACES ±---	±.005
2 PLACES ±.13	±.010
1 PLACE ±.25	±.020
ANGULAR ±1/2°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
IN/MM		NTS	INCH	
DRAWN BY	DATE	TITLE		
VOU	2009/07/06	MICRO-CHANGE CABLE ASSY		
CHECKED BY	DATE	4P M/MP ST/ST D-CODE		
BWOODMAN	2009/07/31	#22/4 SHIELDED PUR		
APPROVED BY	DATE	MOLEX INCORPORATED		
---	---	MATERIAL NO.		
SEE CHART		DOCUMENT NO.		SHEET NO.
SIZE A		SD-120108-019		1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
---	--	--	--	--

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
---	--	--	--	--