

2578 - \* - \* \* \*





MATERIAL CODE  
 (.28)/.0106 THK  
 BLANK=BRASS  
 B=PHOS BRONZE

WINDING SPEC.  
 A=CHAIN, PER WINDING DETAIL "A"  
 BLANK=CHAIN, PER WINDING DETAIL "B"  
 L=LOOSE

PLATING CODE  
 (PER SDES-88)

OPTIONS  
 BLANK=AS SHOWN  
 1 = WITH CAT EARS

(122) - OVERALL TIN: (0.00381)/.000150 MIN.  
 OVER (0.00076)/.000030 MIN. NICKEL  
 (154) - OVERALL TIN (0.00254)/.000100 MIN.  
 OVER (0.00127)/.000050 MIN. NICKEL  
 (224) - OVERALL MATTE TIN: (0.00508)/.000200 MIN.  
 OVER (0.00127)/.000050 MIN. NICKEL  
 (550) - SELECT GOLD: (0.00038)/.000015 MIN.  
 OVERALL GOLD FLASH: (0.00005)/.000002 MIN.  
 OVERALL NICKEL UNDERPLATE: (0.00076)/.000030 MIN.  
 (555) - SELECT GOLD: (0.00038)/.000015 MIN.  
 OVERALL NICKEL UNDERPLATE: (0.00076)/.000030 MIN.  
 (558) - SELECT GOLD: (0.00076)/.000030 MIN.  
 OVERALL GOLD FLASH: (0.00005)/.000002 MIN.  
 OVERALL NICKEL UNDERPLATE: (0.00127)/.000050 MIN.  
 (P909) - OVERALL HOT TIN DIP: (0.00254)/.000100 MIN

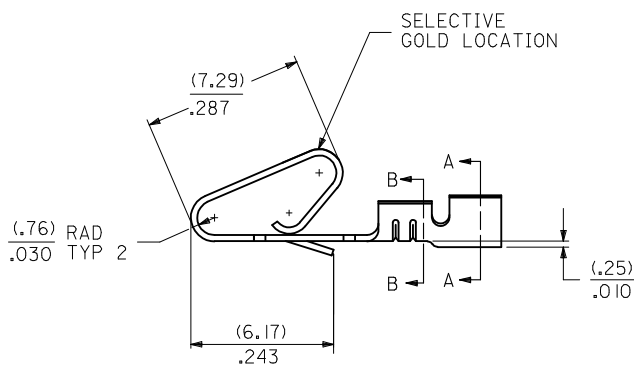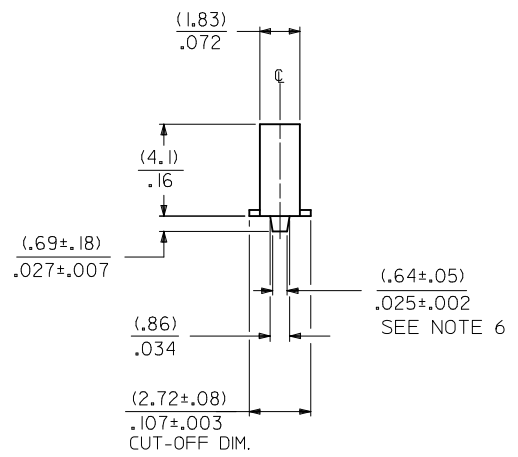

1. MATERIAL: SEE LEGEND
2. FINISH: SEE LEGEND
3. PRODUCT SPECIFICATION: PS-08-50
4. CRIMP ACCEPTS 22 TO 26 GA. WIRE WITH (1.65)/0.65 MAX INSULATION DIA.
5. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
6. OPTIONAL DESIGN (.86±.05)/.034±.002
7. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002

REV	DESCRIPTION	QUALITY SYMBOLS
ADD WINDING VIEW		
EC NO: UCP2014-4131	2014/04/07	
DRW:WIKI PPR	2014/04/07	
CHK:DI NGUYEN	2014/04/07	
APPR:FSMITH	2014/04/21	

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ± --- ± ---	± .010
3 PLACES ± --- ± ---	± .014
2 PLACES ± 0.25 ± ---	± ---
1 PLACE ± 0.36 ± ---	± ---
0 PLACE ± --- ± ---	± ---
ANGULAR ±1/2°	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM/IN	
DRAWN BY	DATE
PEREZ/AR	01/29/87
CHECKED BY	DATE
PATEL	01/29/87
APPROVED BY	DATE
FSMITH	2014/04/21

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
---	INCH	
<b>CRIMP TERMINAL</b> <b>(3.96)/.156 CENTERS</b> <b>22 TO 26 GA WIRE</b> 		
MATERIAL NO.	DOCUMENT NO.	SHEET NO.
SEE CHART	SD-2578	1 OF 2
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX. INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

