

**BD643 – 645 – 647 – 649 – 651**

## SILICON DARLINGTON POWER TRANSISTORS

NPN epitaxial-base transistors in a monolithic Darlington circuit and housed in a TO-220 envelope.

They are intended for output stages in audio equipment, general amplifiers, and analogue switching application.

PNP complements are BD644, BD646, BD648, BD650 and BD652

Compliance to RoHS.

### ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings	Value	Unit	
$V_{CBO}$	Collector-Base Voltage	BD643	60	V
		BD645	80	
		BD647	100	
		BD649	120	
		BD651	140	
$V_{CEO}$	Collector-Emitter Voltage	BD643	45	V
		BD645	60	
		BD647	80	
		BD649	100	
		BD651	120	
$V_{EBO}$	Emitter-Base Voltage	BD643	5	V
		BD645		
		BD647		
		BD649		
		BD651		
$I_C$	Collector Current	BD643	8	A
		BD645		
		BD647		
		BD649		
		BD651		
$I_{CM}$	Collector Peak Current	BD643	12	A
		BD645		
		BD647		
		BD649		
		BD651		

## BD643 – 645 – 647 – 649 – 651

### ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value	Unit
$I_B$	Base Current	BD643	300	mA
		BD645		
		BD647		
		BD649		
		BD651		
$P_T$	Power Dissipation	@ $T_{mb} < 25^\circ$	62.5	Watts
		BD643		
		BD645		
		BD647		
		BD649		
$T_J$	Junction Temperature	BD643	150	$^\circ\text{C}$
		BD645		
		BD647		
		BD649		
		BD651		
$T_s$	Storage Temperature range	BD643	-65 to +150	$^\circ\text{C}$
		BD645		
		BD647		
		BD649		
		BD651		

Limiting values in accordance with the Absolute Maximum System (IEC 134)

### THERMAL CHARACTERISTICS

Symbol	Ratings	Value	Unit
$R_{thJ-MB}$	From junction to mounting base	2	K/W
$R_{thJ-A}$	From junction to ambient in free air	62.5	K/W

## BD643 – 645 – 647 – 649 – 651

### ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted

Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit	
$I_{CBO}$	Collector Cutoff Current	$I_E=0, V_{CB}=V_{CE0Max}$	BD643	-	-	0.2	mA
			BD645				
			BD647				
			BD649				
			BD651				
		$I_E=0, V_{CB}=1/2 V_{CBOMax}$ $T_J=150^\circ C$	BD643	-	-	2	mA
			BD645				
			BD647				
			BD649				
			BD651				
$I_{CEO}$	Collector Cutoff Current	$I_E=0, V_{CE}=1/2 V_{CE0Max}$	BD643	-	-	0.5	mA
			BD645				
			BD647				
			BD649				
			BD651				
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=5 V, I_C=0$	BD643	-	-	5.0	mA
			BD645				
			BD647				
			BD649				
			BD651				
$V_{CE0}$	Collector-Emitter Breakdown Voltage	$I_C=30 mA, I_B=0$	BD643	45	-	-	V
			BD645	60	-	-	
			BD647	80	-	-	
			BD649	100	-	-	
			BD651	120	-	-	
$V_{CE(SAT)}$	Collector-Emitter saturation Voltage (*)	$I_C=4 A, I_B=16 mA$	BD643	-	-	2	V
			BD645				
			BD647				
			BD649				
		$I_C=3 A, I_B=12 mA$	BD643	-	-	2	
			BD645				
			BD647				
			BD649				
		$I_C=5 A, I_B=50 mA$	BD643	-	-	2.5	
			BD645				
			BD647				
			BD649				
$V_{BE(SAT)}$	Base-Emitter Saturation Voltage (*)	$I_C=5 A, I_B=50 mA$	BD643	-	-	3	V
			BD645				
			BD647				
			BD649				
			BD651				

## BD643 – 645 – 647 – 649 – 651

### ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted


Symbol	Ratings	Test Condition(s)	Min	Typ	Max	Unit	
$V_{BE}$	Base-Emitter Voltage (*)	$I_C=4\text{ A}, V_{CE}=3\text{ V}$	BD643	-	-	2.5	V
		$I_C=3\text{ A}, V_{CE}=3\text{ V}$	BD645	-	-	2.5	
			BD647				
			BD649				
			BD651				
$h_{FE}$	DC Current Gain (*)	$V_{CE}=3.0\text{ V}, I_C=0.5\text{ A}$	BD643	-	1900	-	
			BD645				
			BD647				
			BD649				
			BD651				
		$V_{CE}=3.0\text{ V}, I_C=4\text{ A}$	BD643	750	-	-	
			BD645	750	-	-	
							BD647
							BD649
		BD651					
		$V_{CE}=3.0\text{ V}, I_C=8\text{ A}$	BD643	-	1800	-	
			BD645				
BD647							
BD649							
BD651							
$h_{fe}$	Small Signal Current Gain	$V_{CE}=3.0\text{ V}, I_C=4\text{ A}$ $f=1\text{ MHz}$	BD643	10	-	-	-
			BD645	10	-	-	
		BD647					
		BD649					
		BD651					
$V_{CE}=3.0\text{ V}, I_C=3\text{ A}$ $f=1\text{ MHz}$	BD643	10	-	-			
	BD645	10	-	-			
	BD647	10	-	-			
	BD649	10	-	-			

(\*) Pulse Width  $\approx 300\ \mu\text{s}$ , Duty Cycle  $\angle 2.0\%$

## BD643 – 645 – 647 – 649 – 651

### MECHANICAL DATA CASE TO-220

DIMENSIONS (mm)		
	Min.	Max.
A	9,90	10,30
B	15,65	15,90
C	13,20	13,40
D	6,45	6,65
E	4,30	4,50
F	2,70	3,15
G	2,60	3,00
H	15,75	17,15
L	1,15	1,40
M	3,50	3,70
N	-	1,37
P	0,46	0,55
R	2,50	2,70
S	4,98	5,08
T	2,49	2,54
U	0,70	0,90

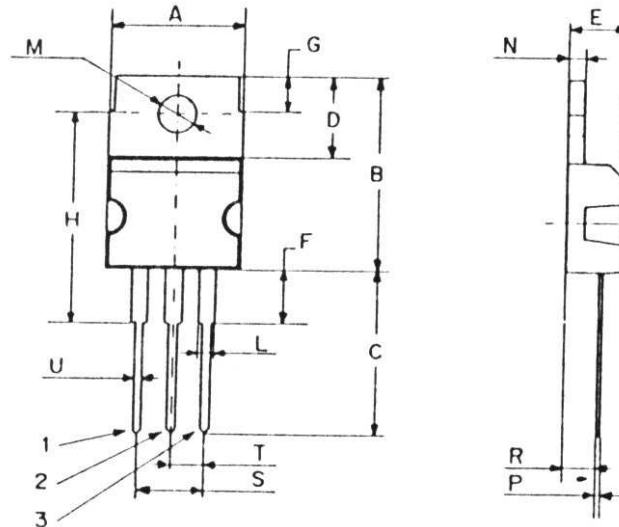

Pin 1 :	Base
Pin 2 :	Collector
Pin 3 :	Emitter
Case :	Collector

Revised September 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.