

BD909 – BD911

SILICON POWER TRANSISTORS

The BD909 and DB911, are silicon epitaxial-base NPN power transistors in a TO-220 envelope. They are intended for use in power linear and switching applications. Compliance to RoHS.

ABSOLUTE MAXIMUM RATINGS

Symbol	Ratings		Value		Unit
			BD909	BD911	
V_{CBO}	Collector-Base Voltage	$I_E = 0$	80	100	V
V_{CEO}	Collector-Emitter Voltage	$I_B = 0$	80	100	V
V_{EBO}	Emitter-Base Voltage	$I_C = 0$	5		V
I_C	Collector Current		15		A
I_E	Emitter Current		15		A
I_B	Base Current		5		A
P_t	Power Dissipation		90		W
T_j	Junction Temperature		150		°C
T_{stg}	Storage Temperature range		-65 to 150		

Limiting values in accordance with the Absolute Maximum System (IEC 134)

THERMAL CHARACTERISTICS

Symbol	Ratings	Value	Unit
R_{thJ-mb}	From junction to mounting base	1.4	°C/W

BD909 – BD911

ELECTRICAL CHARACTERISTICS

TC=25°C unless otherwise noted


Symbol	Ratings	Test Condition(s)		Value			Unit	
				Min	Typ	Max		
I_{CBO}	Collector Cutoff Current	$V_{CB} = 80\text{ V}$	$T_J = 25^\circ\text{C}$	BD909	-	-	0.5	mA
		$V_{CB} = 100\text{ V}$		BD911				
		$V_{CB} = 80\text{ V}$	$T_J = 150^\circ\text{C}$	BD909	-	-	5	
		$V_{CB} = 100\text{ V}$		BD911				
I_{CEO}	Collector Cutoff Current	$V_{CE} = 40\text{ V}$		BD909	-	-	1	mA
		$V_{CE} = 50\text{ V}$		BD911				
I_{EBO}	Emitter Cutoff Current	$V_{EB} = 5\text{ V}, I_C = 0$		BD909	-	-	1	mA
				BD911				
$V_{CE0sust}$	Collector-Emitter Sustaining Voltage (*)	$I_B = 0, I_C = 0.1\text{ A}$		BD909	80	-	-	V
				BD911	100	-	-	
$V_{CE(SAT)}$	Collector-Emitter saturation Voltage (*)	$I_C = 5\text{ A}, I_B = 500\text{ mA}$		BD909	-	-	1	V
				BD911				
		$I_C = 10\text{ A}, I_B = 2.5\text{ A}$		BD909	-	-	3	
				BD911				
$V_{BE(SAT)}$	Base-Emitter Saturation Voltage (*)	$I_C = 10\text{ A}, I_B = 2.5\text{ A}$		BD909	-	-	2.5	V
				BD911				
V_{BE}	Base-Emitter Voltage (*)	$I_C = 5\text{ A}, V_{CE} = 4\text{ V}$		BD909	-	-	1.5	V
				BD911				
h_{FE}	DC Current Gain (*)	$I_C = 0.5\text{ A}, V_{CE} = 4\text{ V}$		BD909	40	-	250	-
				BD911				
h_{FE}	DC Current Gain (*)	$I_C = 5\text{ A}, V_{CE} = 4\text{ V}$		BD909	15	-	150	
				BD911				
h_{FE}	DC Current Gain (*)	$I_C = 10\text{ A}, V_{CE} = 4\text{ V}$		BD909	5	-	-	
				BD911				
f_T	Transition Frequency	$I_C = 0.5\text{ A}, V_{CE} = 4\text{ V}$		BD909	3	-	-	MHz
				BD911				

(*) Pulse Width $\approx 300\ \mu\text{s}$, Duty Cycle $\angle 1.5\%$

BD909 – BD911

MECHANICAL DATA CASE TO-220

DIMENSIONS (mm)		
	Min.	Max.
A	9,90	10,30
B	15,65	15,90
C	13,20	13,40
D	6,45	6,65
E	4,30	4,50
F	2,70	3,15
G	2,60	3,00
H	15,75	17,15
L	1,15	1,40
M	3,50	3,70
N	-	1,37
P	0,46	0,55
R	2,50	2,70
S	4,98	5,08
T	2.49	2.54
U	0,70	0,90

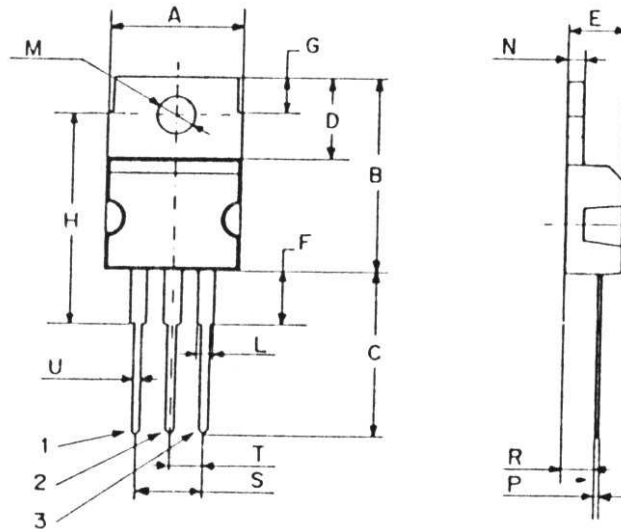

Pin 1 :	Base
Pin 2 :	Collector
Pin 3 :	Emitter
Package	Collector

Revised August 2012

Information furnished is believed to be accurate and reliable. However, Comset Semiconductors assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Data are subject to change without notice. Comset Semiconductors makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Comset Semiconductors assume any liability arising out of the application or use of any product and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Comset Semiconductors' products are not authorized for use as critical components in life support devices or systems.