



Phase Control Thyristor

V_{RRM} = 1200-1600 V
I_{T(RMS)} = 75 A
I_{T(AV)M} = 48 A

V _{RSM}	V _{RRM}	Part Number
V _{DSM}	V _{DRM}	
V	V	
1300	1200	CS 60-12io1
1500	1400	CS 60-14io1
1700	1600	CS 60-16io1



PLUS247



C = Cathode, A = Anode, G = Gate

Symbol	Test Conditions	Maximum Ratings		
I _{T(RMS)}	T _{VJ} = T _{VJM}	(lead current limit)	75	A
I _{T(AV)M}	T _C = 105°C; 180° sine		48	A
I _{TSM}	T _{VJ} = 45°C; V _R = 0 V	t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine	1400	A
	T _{VJ} = T _{VJM} V _R = 0 V	t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine	1500	A
i ² t	T _{VJ} = 45°C V _R = 0 V	t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine	9800	A ² s
	T _{VJ} = T _{VJM} V _R = 0 V	t = 10 ms (50 Hz), sine t = 8.3 ms (60 Hz), sine	9500	A ² s
(di/dt) _{cr}	T _{VJ} = T _{VJM} f = 50Hz, t _p = 200μs V _D = 2/3 V _{DRM} I _G = 0.3 A di _G /dt = 0.3 A/μs	repetitive, I _T = 60 A non repetitive, I _T = I _{T(AV)M}	150	A/μs
(dv/dt) _{cr}	T _{VJ} = T _{VJM} R _{GK} = ∞; method 1 (linear voltage rise)	V _{DR} = 2/3 V _{DRM}	1000	V/μs
P _{GM}	T _{VJ} = T _{VJM} I _T = I _{T(AV)M}	t _p = 30 μs t _p = 300 μs	10 5 0.5	W W W
P _{G(AV)}				
V _{RGM}			10	V
T _{VJ}			-40...+140	°C
T _{VJM}			140	°C
T _{stg}			-40...+125	°C
F _c	Mounting Force	20...120/4.5...27	N/lbs	
Weight		6	g	

Features

- Thyristor for line frequency applications
- Junction coated, planar passivated die
- Long-term stability of blocking currents and voltages
- RoHS compliant
- Epoxy meets UL 94V-0
- International standard package

Applications

- Motor control
- Power converter
- AC power controller
- Light and temperature controls

Advantages

- Easy to mount
- Tab tin plated for surface mount
- Space and weight savings
- Simple mounting

Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions

20090602

Symbol	Test Conditions	Characteristic Values		
I_R, I_D	$T_{VJ} = T_{VJM}$; $V_R = V_{RRM}$; $V_D = V_{DRM}$ $T_{VJ} = 25^\circ\text{C}$	\leq	10	mA
		\leq	0.2	mA
V_T	$I_T = 100 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$	\leq	1.4	V
V_{T0}	For power-loss calculations only ($T_{VJ} = 125^\circ\text{C}$)	0.85	V	
r_T		3.7	$\text{m}\Omega$	
V_{GT}	$V_D = 6 \text{ V}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$	\leq	1.5	V
		\leq	1.6	V
I_{GT}	$V_D = 6 \text{ V}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$	\leq	100	mA
		\leq	200	mA
V_{GD}	$T_{VJ} = T_{VJM}$; $V_D = 2/3 V_{DRM}$	\leq	0.2	V
I_{GD}		\leq	10	mA
I_L	$T_{VJ} = 25^\circ\text{C}$; $t_p = 10 \mu\text{s}$ $I_G = 0.45 \text{ A}$; $di_G/dt = 0.45 \text{ A}/\mu\text{s}$	\leq	450	mA
I_H	$T_{VJ} = 25^\circ\text{C}$; $V_D = 6 \text{ V}$; $R_{GK} = \infty$	\leq	200	mA
t_{gd}	$T_{VJ} = 25^\circ\text{C}$; $V_D = 1/2 V_{DRM}$ $I_G = 0.45 \text{ A}$; $di_G/dt = 0.45 \text{ A}/\mu\text{s}$	\leq	2	μs
R_{thJC}	DC current	0.32	K/W	
R_{thJK}	DC current	0.47	K/W	

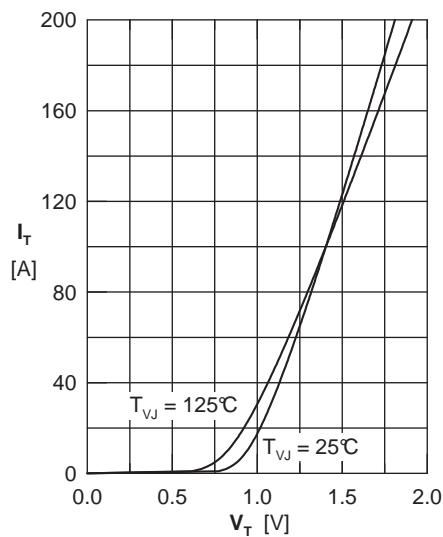



Fig. 1 Forward characteristics

PLUS247™ Outline

Terminals:
1 - Cathode
2 - Anode
3 - Gate
Tab - Anode

All leads and backside tab are tin plated.

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.83	5.21	.190	.205
A_1	2.29	2.54	.090	.100
A_2	1.91	2.16	.075	.085
b	1.14	1.40	.045	.055
b_1	1.91	2.13	.075	.084
b_2	2.92	3.12	.115	.123
C	0.61	0.80	.024	.031
D	20.80	21.34	.819	.840
E	15.75	16.13	.620	.635
e	5.45	BSC	.215	BSC
L	19.81	20.32	.780	.800
L1	3.81	4.32	.150	.170
Q	5.59	6.20	.220	.244
R	4.32	4.83	.170	.190