



**FEATURES:**

- RoHS compliant
- 24 Pin DIP Package
- Wide 4:1 input range
- Power modules for PCB mounting
- Operating temperature -40°C to + 75°C
- Regulated output
- Low ripple and noise
- Input/Output Isolation voltage 1500VDC

**Models**  
**Single output**

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Ripple & Noise typ.	Efficiency (%)
AM8TW-2403SIZ	9-36	3.3	1400	80mV p-p	76
AM8TW-2405SIZ	9-36	5	1500	80mV p-p	82
AM8TW-2412SIZ	9-36	12	620	120mV p-p	84
AM8TW-2415SIZ	9-36	15	500	150mV p-p	84
AM8TW-4803SIZ	18-75	3.3	1400	80mV p-p	76
AM8TW-4805SIZ	18-75	5	1500	80mV p-p	82
AM8TW-4812SIZ	18-75	12	620	120mV p-p	84
AM8TW-4815SIZ	18-75	15	500	150mV p-p	84

**Models**  
**Dual output**

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Ripple & Noise typ	Efficiency (%)
AM8TW-2405DIZ	9-36	±5	±750	80mV p-p	82
AM8TW-2412DIZ	9-36	±12	±310	120mV p-p	84
AM8TW-2415DIZ	9-36	±15	±250	150mV p-p	84
AM8TW-4805DIZ	18-75	±5	±750	80mV p-p	82
AM8TW-4812DIZ	18-75	±12	±310	120mV p-p	84
AM8TW-4815DIZ	18-75	±15	±250	150mV p-p	83

**Input Specifications**

Parameters	Conditions	Typical	Maximum	Units
Voltage range	24	9-36		VDC
	48	18-75		
Filter	π (Pi) Network			
Absolute Maximum Rating	24 Vin		40	VDC
	48 Vin		83	
Permissible absolute maximum duration			2	h

**Isolation Specifications**

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	60 sec		1500	VDC
Resistance		> 1000		MOhm
Capacitance		1000		pF

**Output Specifications**

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±2		%
Short Circuit protection	Continuous			
Short Circuit restart	Auto recovery			
Over voltage protection	Zener diode clamp			
Over load protection	Over 110% full load with auto recovery			
Line voltage regulation (Single)	HL-LL	±0.5		%
Line voltage regulation (Dual)	HL-LL	±0.5		%

### Output Specifications (continued)

Parameters	Conditions	Typical	Maximum	Units
Load voltage regulation (Single)	10-100%	±0.5		%
Load voltage regulation (Dual)	10-100%	±2		%
Temperature coefficient		±0.05		%/°C

### General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	300		KHz
Operating temperature	Derating above 70		-40 to +75	°C
Storage temperature			-55 to +115	°C
Max Case temperature			95	°C
Derating	Above 70			°C
Cooling		Free air convection		
Humidity			95	%
Case material		Nickel coated copper		
Weight		16		g
Dimensions (L x W x H)	Tolerance ±0.5mm	1.25 x 0.80 x 0.40 inches	31.80 x 20.30 x 10.20 mm	
MTBF		> 800 000 hrs (MIL-HDBK -217F, Ground Benign, t=+25°C)		

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.


### Safety Specifications

Standards	
Agency approvals	CE
Safety	EN 55011 (Industrial, scientific and medical radio frequency equipment- radio disturbance)


### Pin Out Specifications

Pin	Single	Dual
2	-V Input	-V Input
3	-V Input	-V Input
9	N.C.	Common
10	Omitted	Omitted
11	N.C.	-V Output
14	+V Output	+V Output
15	Omitted	Omitted
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

### Dimensions

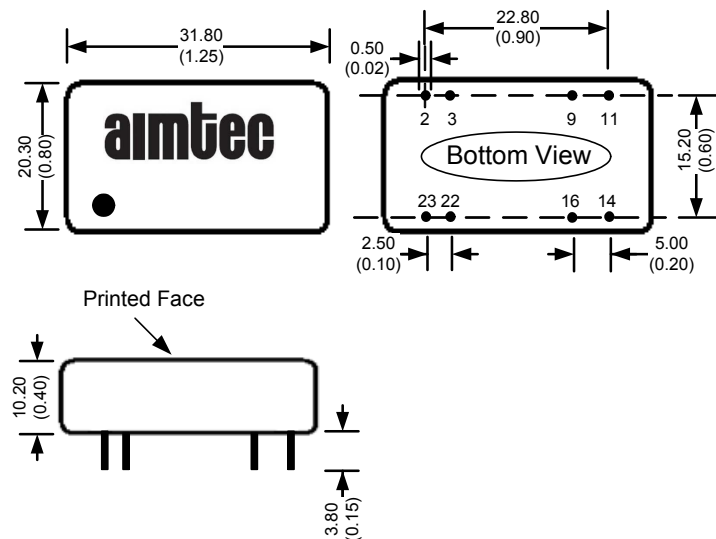

## Derating

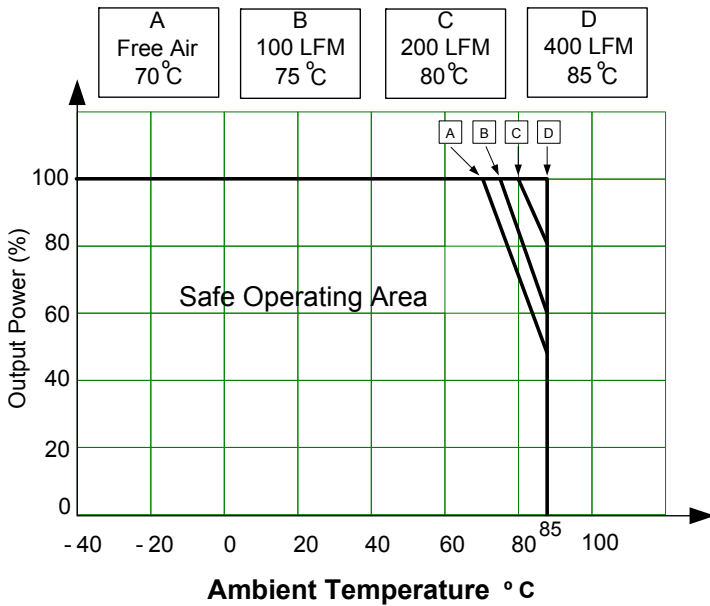

**NOTE:** 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).