

SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE 20 to 60 Volts CURRENT 10 Amperes


FEATURES

- * Low switching noise
- * Low forward voltage drop
- * Low thermal resistance
- * High current capability
- * High switching capability
- * High surge capability
- * High reliability

MECHANICAL DATA

- * Case: To-220 molded plastic
- * Epoxy: Device has UL flammability classification 94V-O
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting position: Any
- * Weight: 2.24 grams

TO-220A

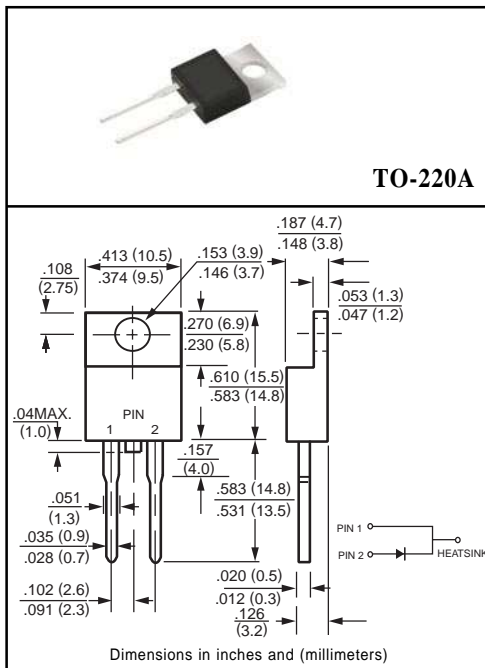

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

RATINGS	SYMBOL	SR1020	SR1030	SR1035	SR1040	SR1045	SR1050	SR1060	UNITS	
Maximum Recurrent Peak Reverse Voltage	VRRM	20	30	35	40	45	50	60	Volts	
Maximum RMS Voltage	VRMS	14	21	25	28	32	35	42	Volts	
Maximum DC Blocking Voltage	VDC	20	30	35	40	45	50	60	Volts	
Maximum Average Forward Rectified Current at Derating Case Temperature	IO	10								Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	150								Amps
Typical Thermal Resistance (Note 1)	RθJC	3								°C/W
Typical Junction Capacitance (Note 3)	CJ	700					500			pF
Operating Temperature Range	TJ	-55 to + 150								°C
Storage Temperature Range	TSTG	-55 to + 150								°C

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

CHARACTERISTICS	SYMBOL	SR1020	SR1030	SR1035	SR1040	SR1045	SR1050	SR1060	UNITS	
Maximum Instantaneous Forward Voltage at 10.0A DC	VF	.65					.75			Volts
Maximum Average Reverse Current @ Tc = 25°C	IR	10								mAmps
at Rated DC Blocking Voltage @ Tc = 100°C		100								mAmps

- NOTES : 1. Thermal Resistance Junction to Case.
2. Suffix "A" = Common Anode.
3. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

RATING AND CHARACTERISTIC CURVES (SR1020 THRU SR1060)

