

Buffered H-Bridge

FEATURES

- 1.0-A H-Bridge
- 500-kHz Switching Rate
- Shoot-Through Limited
- TTL Compatible Inputs
- 3.8- to 13.2-V Operating Range
- Surface Mount Packaging

APPLICATIONS

- VCM Driver
- Brushed Motor Driver
- Stepper Motor Driver
- Power Converter
- Optical Disk Drives
- Power Supplies
- High Performance Servo

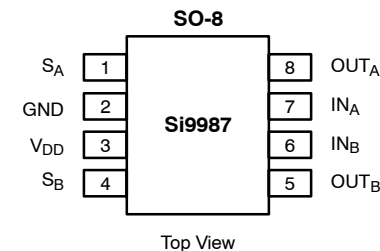
DESCRIPTION

The Si9987 is an integrated, buffered H-bridge with TTL compatible inputs and the capability of delivering a continuous 1.0 A @ $V_{DD} = 5.0$ V (room temperature) at switching rates up to 500 kHz. Internal logic prevents the upper and lower outputs of either half-bridge from being turned on simultaneously. Unique input codes allow both outputs to be forced low (for braking) or


forced to a high impedance level.

The Si9987 is available in an 8-Pin SOIC package, specified to operate over a voltage range of 3.8 V to 13.2 V, and the commercial temperature range of 0 to 70°C (C suffix) and -40 to 85°C (D suffix). The Si9987 is available in lead free.

FUNCTIONAL BLOCK DIAGRAM, PIN CONFIGURATION AND TRUTH TABLE



| TRUTH TABLE | | | |
|-----------------|-----------------|------------------|------------------|
| IN _A | IN _B | OUT _A | OUT _B |
| 1 | 0 | 1 | 0 |
| 0 | 1 | 0 | 1 |
| 0 | 0 | 0 | 0 |
| 1 | 1 | HiZ | HiZ |

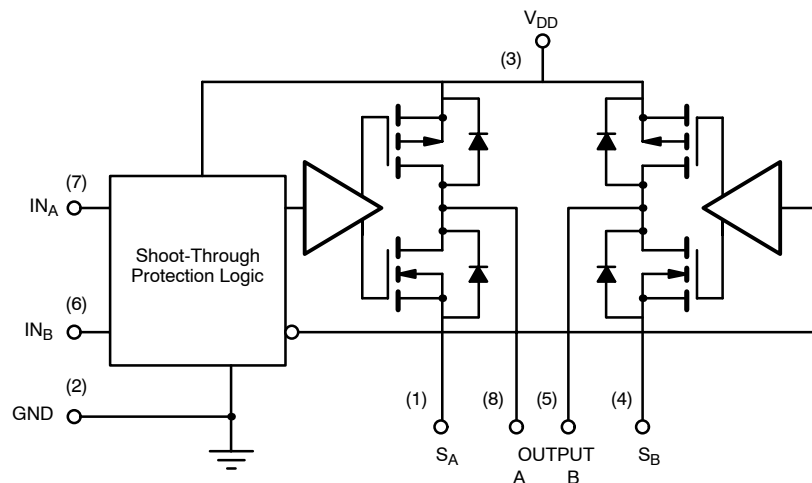

ORDERING INFORMATION

| Part Number | Temperature Range | Package |
|----------------|-------------------|-------------------------|
| Si9987CY-T1 | 0 to 70°C | Tape and Reel |
| Si9987DY-T1 | -40 to 85°C | |
| Si9987CY-T1—E3 | 0 to 70°C | Lead Free Tape and Reel |
| Si9987DY-T1—E3 | -40 to 85°C | |
| Si9987CY | 0 to 70°C | Bulk (tubes) |
| Si9987DY | -40 to 85°C | |

ABSOLUTE MAXIMUM RATINGS^a

| | |
|---|----------------------------|
| Voltage on any pin with respect to ground | −0.3 V to $V_{DD} + 0.3$ V |
| Voltage on pins 5, 8 with respect to GND | −1 V to $V_{DD} + 1$ V |
| Voltage on pins 1, 4 | −0.3 V to GND +1 V |
| Maximum V_{DD} | 15 V |
| Peak Output Current | 1.5 A |
| Storage Temperature | −65 to 150°C |
| Maximum Junction Temperature (T_J) | 150°C |
| Power Dissipation ^b | 1 W |
| θ_{JA} | 100°C/W |

Continuous I_{OUT} Current ($T_J = 135^\circ\text{C}$)^c

| | |
|--------------------------|--------------|
| $T_A = 25^\circ\text{C}$ | ± 1.02 A |
| $T_A = 70^\circ\text{C}$ | ± 0.75 A |
| $T_A = 85^\circ\text{C}$ | ± 0.65 A |

Operating Temperature Range

| | |
|----------|-------------|
| Si9987CY | 0 to 70°C |
| Si9987DY | −40 to 85°C |

Notes

- Device mounted with all leads soldered or welded to PC board.
- Derate 10 mW/°C above 25°C.
- $T_J = T_A + (P_D \times \theta_{JA})$, P_D = Power Dissipation.







RECOMMENDED OPERATING RANGE







| | |
|--|-----------------|
| V_{DD} | 3.8 V to 13.2 V |
| Maximum Junction Temperature (T_J) | 135°C |

| SPECIFICATIONS | | | | | | | |
|---------------------------------------|-------------------|---|----------------------------|------------------|----------------------|----------------------|------|
| Parameter | Symbol | Test Conditions Unless Specified V _{DD} = 3.8 to 13.2 V S _A @ GND, S _B @ GND | | Limits | | | Unit |
| | | | | Min ^a | Typ ^b | Max ^a | |
| Input | | | | | | | |
| Input Voltage High | V _{INH} | | | 2 | | | V |
| Input Voltage Low | V _{INL} | | | | | 1 | |
| Input Current with Input Voltage High | I _{INH} | V _{IN} = 2 V | | | | 1 | μA |
| Input Current with Input Voltage Low | I _{INL} | V _{IN} = 0 V | | −1 | | | |
| Output | | | | | | | |
| Output Voltage High ^c | V _{OUTH} | I _{OUT} = −1 A | V _{DD} = 10.8 V | 10.40 | 10.56 | | V |
| | | | V _{DD} = 4.5 V | 4.00 | 4.20 | | |
| | | I _{OUT} = −500 mA | V _{DD} = 10.8 V | 10.60 | 10.68 | | |
| | | | V _{DD} = 4.5 V | 4.25 | 4.35 | | |
| | | I _{OUT} = −300 mA, V _{DD} = 3.8 V | | 3.63 | 3.70 | | |
| Output Voltage Low ^c | V _{OUTL} | I _{OUT} = 1 A | V _{DD} = 10.8 V | | 0.24 | 0.40 | |
| | | | V _{DD} = 4.5 V | | 0.30 | 0.50 | |
| | | I _{OUT} = 500 mA | V _{DD} = 10.8 V | | 0.12 | 0.20 | |
| | | | V _{DD} = 4.5 V | | 0.15 | 0.25 | |
| | | I _{OUT} = 300 mA, V _{DD} = 3.8 V | | | 0.10 | 0.17 | |
| Output Leakage Current Low | I _{OLL} | I _{NA} = I _{NB} ≥ 2 V, V _{OUT} = V _{DD} = 13.2 V | | | 0 | 10 | μA |
| Output Leakage Current High | I _{OLH} | V _{OUT} = 0, V _{DD} = 13.2 V | | −10 | 0 | | |
| Output V Clamp High | V _{CLH} | I _{NA} = I _{NB} ≥ 2 V | I _{OUT} = 100 mA | | V _{DD} +0.7 | V _{DD} +0.9 | V |
| Output V Clamp Low | V _{CLL} | | I _{OUT} = −100 mA | −0.9 | −0.7 | | |
| Supply | | | | | | | |
| V _{DD} Supply Current | I _{DD} | IN = 100 kHz, V _{DD} = 5.5 V | | | 1.8 | 2.5 | mA |
| | | I _{NA} = I _{NB} = 4.5 V, V _{DD} = 5.5 V | | | 75 | 125 | μA |
| Dynamic | | | | | | | |
| Propogation Delay Time | T _{PLH} | V _{DD} = 5 V | | | 300 | | nS |
| | T _{PHL} | | | | 100 | | |

Notes

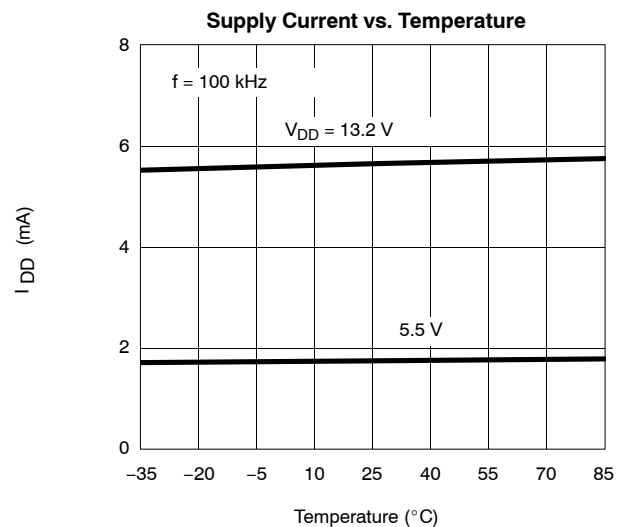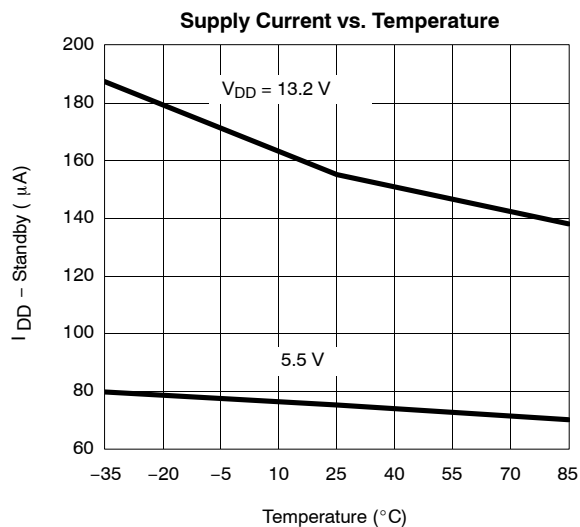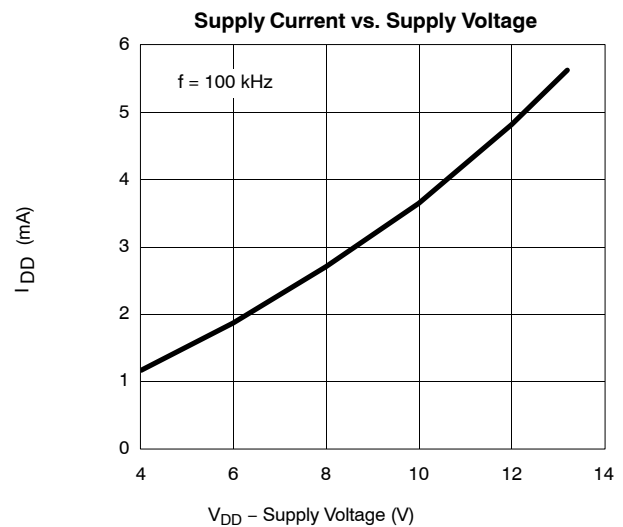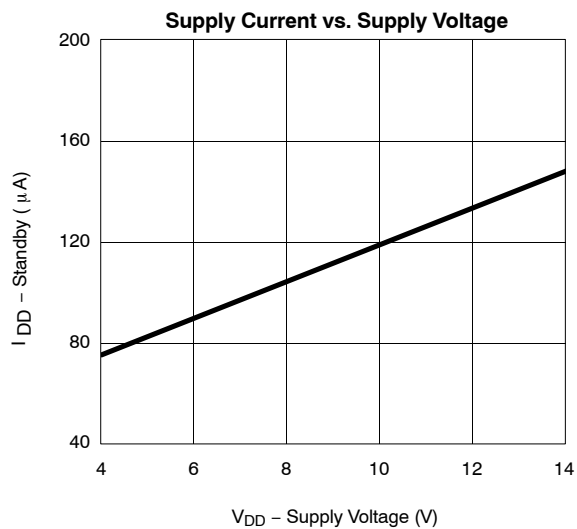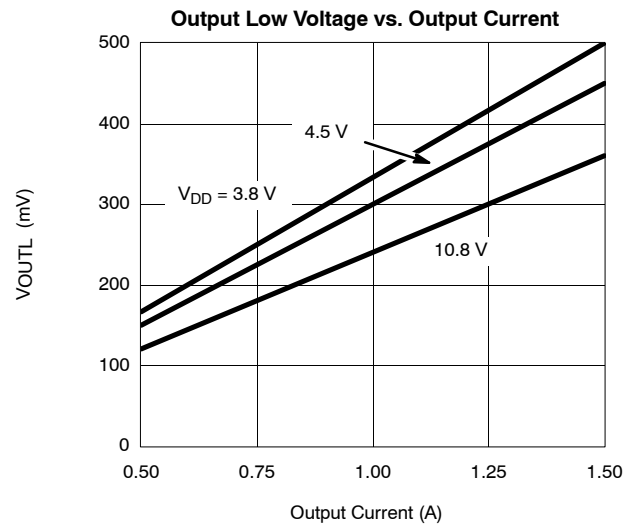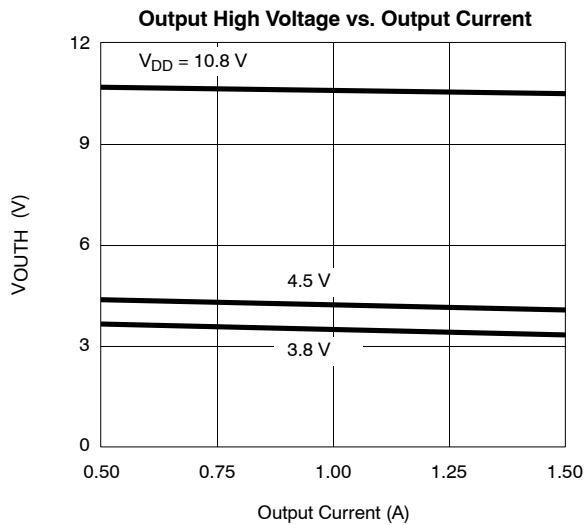- The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- Maximum value measured at $T_J = 135^\circ\text{C}$. Typical value measured at $T_J = T_A = 25^\circ\text{C}$ (pulse width ≤ 300 μsec , duty cycle $\leq 2\%$).

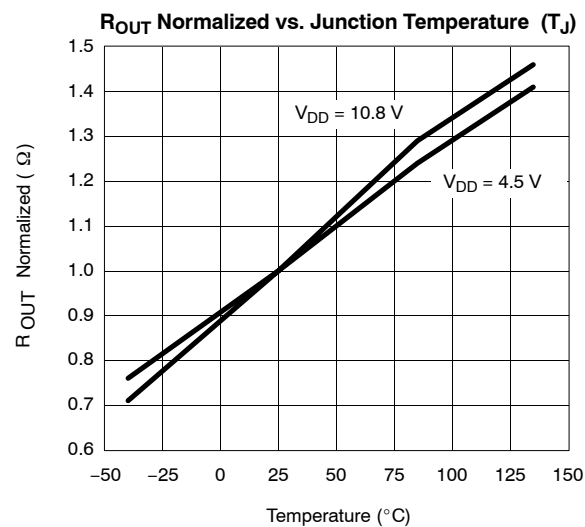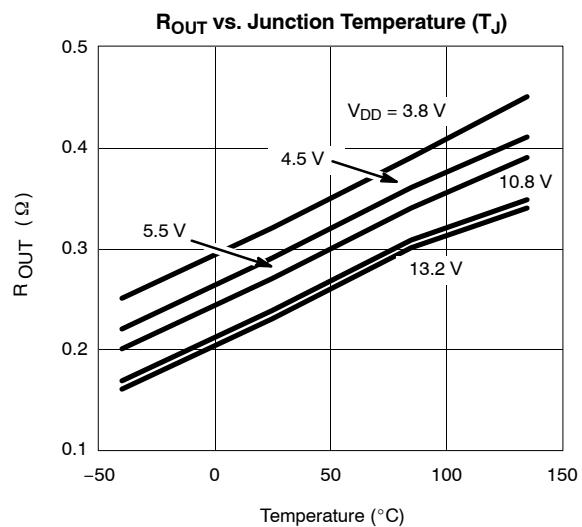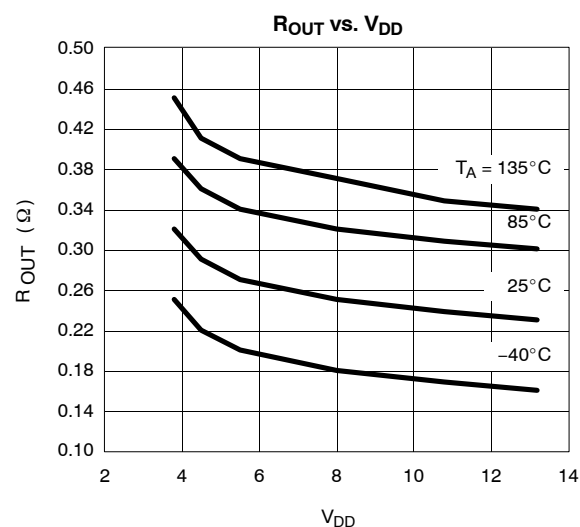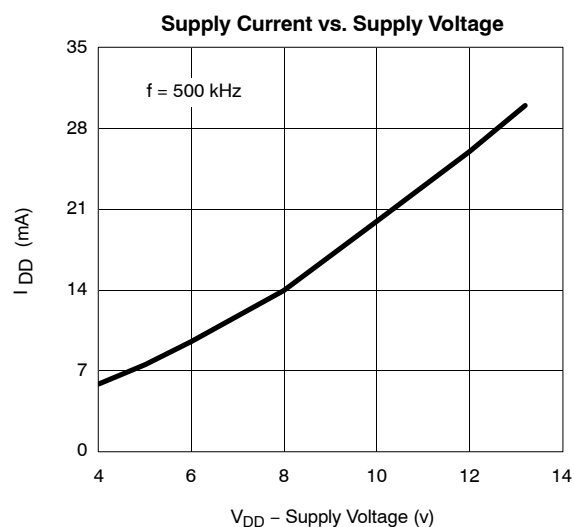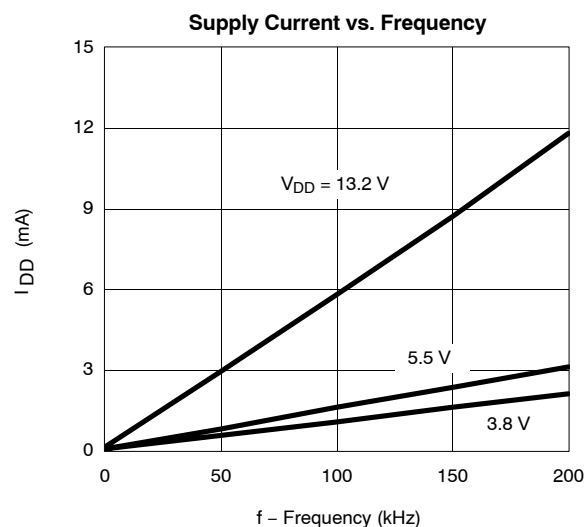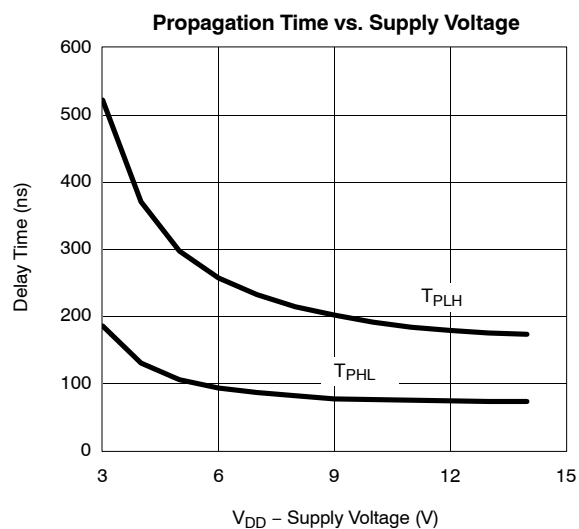TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)


TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)




Notice

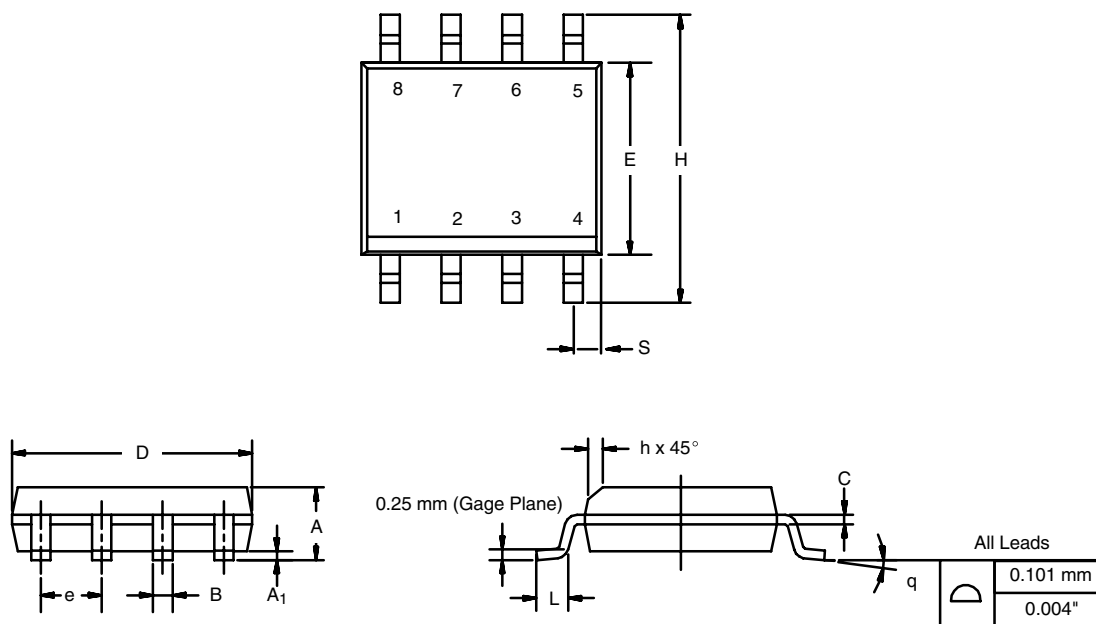
Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

SOIC (NARROW): 8-LEAD

JEDEC Part Number: MS-012



| DIM | MILLIMETERS | | INCHES | |
|--------------------------------|-------------|------|-----------|-------|
| | Min | Max | Min | Max |
| A | 1.35 | 1.75 | 0.053 | 0.069 |
| A ₁ | 0.10 | 0.20 | 0.004 | 0.008 |
| B | 0.35 | 0.51 | 0.014 | 0.020 |
| C | 0.19 | 0.25 | 0.0075 | 0.010 |
| D | 4.80 | 5.00 | 0.189 | 0.196 |
| E | 3.80 | 4.00 | 0.150 | 0.157 |
| e | 1.27 BSC | | 0.050 BSC | |
| H | 5.80 | 6.20 | 0.228 | 0.244 |
| h | 0.25 | 0.50 | 0.010 | 0.020 |
| L | 0.50 | 0.93 | 0.020 | 0.037 |
| q | 0° | 8° | 0° | 8° |
| S | 0.44 | 0.64 | 0.018 | 0.026 |
| ECN: C-06527-Rev. I, 11-Sep-06 | | | | |
| DWG: 5498 | | | | |



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.