

Industrial DC-DC Converters

10-15 Watts WD Series



THE **XP**ERTS IN POWER

- 2:1 Input Range
- Isolated Outputs
- Efficiency to 82%
- 200 kHz Switching Frequency
- Input π Filter
- Fully Regulated Outputs
- Six-sided Shield

Specification

Input

- **Input Voltage Range**
 - 5 V (4.7-9.0 VDC)
 - 12 V (9-18 VDC)
 - 24 V (18-36 VDC)
 - 48 V (36-72 VDC)
- **Input Filter**
 - π Network

Output

- **Output Power**
 - 8 Watts for 5 V input version
 - 10 Watts for 12 V input version
 - 15 Watts for 24 & 48 V input versions (optional 10 Watts)
- **Voltage Accuracy**
 - $\pm 1\%$ max
- **Line Regulation**
 - $\pm 0.2\%$ max
- **Load Regulation**
 - $\pm 1\%$ max for a 75% load change
- **Ripple & Noise**
 - 100 mV pK-pK max (20 MHz bandwidth)
- **Temperature Coefficient**
 - $\pm 0.02\%/^{\circ}\text{C}$ max
- **Short Circuit Protection**
 - Continuous

General

- **Switching Frequency**
 - 200 kHz typical
- **Efficiency**
 - See Table
- **Isolation**
 - 500 V DC input to output (1000 M Ω /80 pF)
- **Dimensions**
 - 2.0" x 1.0" x 0.4"
- **Weight**
 - 35 g
- **MTBF**
 - 950,000 hours to MIL-STD-217F

Environmental

- **Operating Temperature**
 - -25 $^{\circ}\text{C}$ to +71 $^{\circ}\text{C}$
- **Storage Temperature**
 - -40 $^{\circ}\text{C}$ to +100 $^{\circ}\text{C}$

Safety


- **Safety Approvals**
 - UL1950 for LU versions only

OUTPUT VOLTAGE & CURRENT RATINGS						WD
Input Voltage ⁽¹⁾	Output Voltage	Output Current	Input Current ⁽⁴⁾		Efficiency	Model Number ^(2,3)
			No Load	Full Load		
4.7-9.0 VDC	5.0 VDC	1600 mA	15 mA	2130 mA	75%	WD501
	12.0 VDC	666 mA	15 mA	2100 mA	76%	WD502
	15.0 VDC	533 mA	15 mA	2100 mA	76%	WD503
	±12.0 VDC	±333 mA	15 mA	2100 mA	76%	WD504
	±15.0 VDC	±266 mA	15 mA	2100 mA	76%	WD505
9-18 VDC	±5.0 VDC	±800 mA	15 mA	2100 mA	76%	WD506
	3.3 VDC	3000 mA	20 mA	1056 mA	76%	WD100
	5.0 VDC	2000 mA	30 mA	1100 mA	76%	WD101
	12.0 VDC	830 mA	30 mA	1065 mA	78%	WD102
	15.0 VDC	666 mA	30 mA	1065 mA	78%	WD103
	±12.0 VDC	±415 mA	40 mA	1065 mA	78%	WD104
	±15.0 VDC	±333 mA	40 mA	1065 mA	78%	WD105
18-36 VDC	±5.0 VDC	±1000 mA	40 mA	1065 mA	78%	WD106
	3.3 VDC	3000 mA	20 mA	543 mA	76%	WD200
	5.0 VDC	3000 mA	20 mA	800 mA	78%	WD201
	12.0 VDC	1250 mA	20 mA	780 mA	80%	WD202
	15.0 VDC	1000 mA	20 mA	780 mA	80%	WD203
	±12.0 VDC	±625 mA	30 mA	780 mA	80%	WD204
	±15.0 VDC	±500 mA	30 mA	780 mA	80%	WD205
36-72 VDC	±5.0 VDC	±1500 mA	30 mA	780 mA	80%	WD206
	3.3 VDC	3000 mA	15 mA	272 mA	76%	WD300
	5.0 VDC	3000 mA	10 mA	390 mA	80%	WD301
	12.0 VDC	1250 mA	10 mA	380 mA	82%	WD302
	15.0 VDC	1000 mA	10 mA	380 mA	82%	WD303
	±12.0 VDC	±625 mA	15 mA	380 mA	82%	WD304
	±15.0 VDC	±500 mA	15 mA	380 mA	82%	WD305
	±5.0 VDC	±1500 mA	15 mA	380 mA	82%	WD306

Notes

- Nominal input voltage 5, 12, 24 or 48 VDC.
- For optional 10 W version: Add Suffix 'L' to WD2xx and WD3xx, except models WD200 and WD300.
- UL1950 approvals available on 10 W models only. Add suffix 'LU' to models WD1xx, WD2xx or WD3xx, not available on WD5xx series.
- Input current is at nominal input voltage.

Mechanical Details

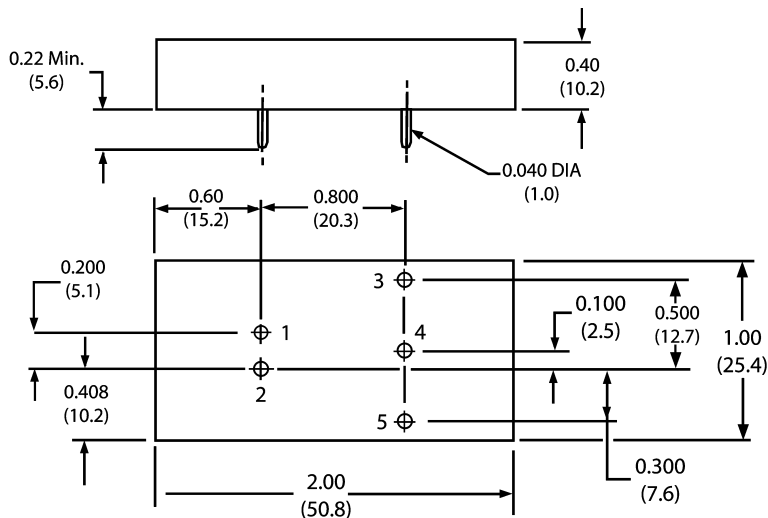

Dimensions in inches (mm)

PIN CONNECTIONS		
Pin	Single Output	Dual Output
1	+ Input	+ Input
2	- Input	-Input
3	+Output	+Output
4	No Pin	Common
5	-Output	-Output

