


	(mm)			
φD	4	5	6.3	8
P	1.5	2.0	2.5	3.5
φd	0.45	0.45	0.45	0.5

1 2 3 4 5 6 7 8 9 10 11  
 U S V 1 A 3 3 0 M F D

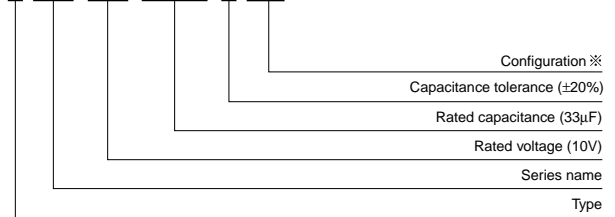

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
4 to 8	FD

Configuration ※

Capacitance tolerance (±20%)

Rated capacitance (33μF)

Rated voltage (10V)

Series name

Type