

Type 3R Painted Galvanized Steel Enclosure *C3R HCLO*

Series

Lift-Off Hinge Door with Snap Latch



Application

- Designed for use as a wiring/junction box.
- Provides protection against rain, sleet, snow and dripping water.

Standards

- UL-50 Type 3R
- CSA Type 3R
- Complies with
 - NEMA Type 3R
 - IEC 60529, IP24

Construction


- Formed and spot welded from 16 or 14 gauge galvanized steel.
- Extended height door and seam-free sides, front and back.
- Galvanized steel lift-off hinges with stainless steel pins.
- Cover fastened securely with zinc plated draw pull catches.
- Provisions for padlocking on zinc-plated draw pull catch.
- Embossed mounting holes on back.
- Oil resistant gaskets are permanently secured.

Finish


- Enclosure and cover are finished in ANSI 61 gray powder coating.



16x12 and Smaller

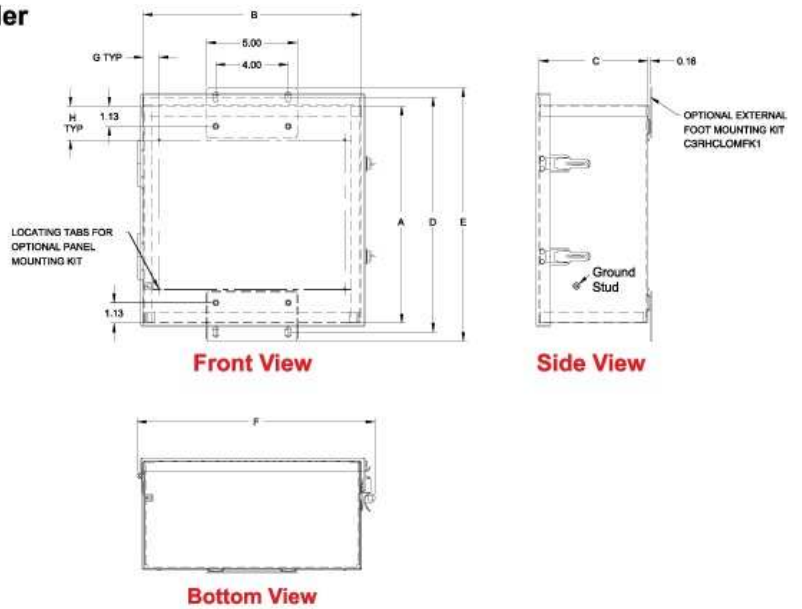

16x16 and Larger

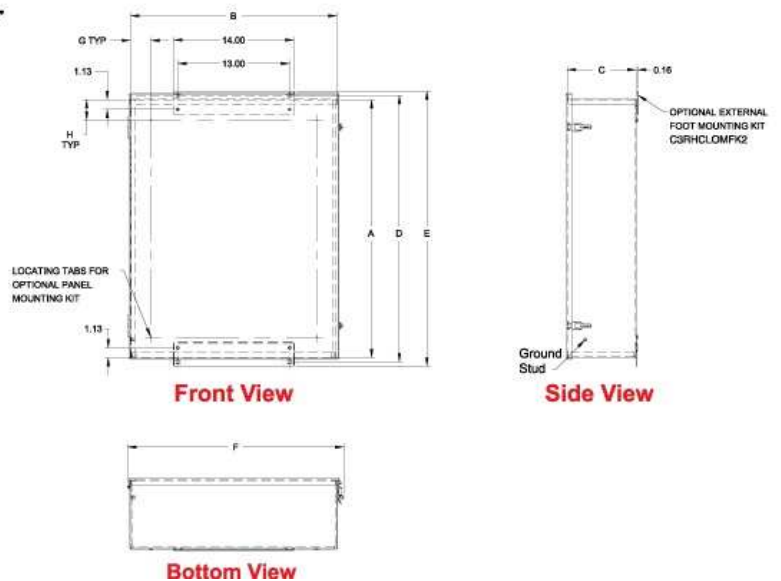

Part Number	Optional		Optional		A	B	C	Optional			
	Panel	Panel Mounting Kit	Mount Kit	Foot Kit				Panel Size	D		
C3R864HCLO	14R0505	C3RHCLOPK1	C3RHCLOMFK1		8.00	6.00	4.00	4.88	4.88	9.00	1
C3R886HCLO	14R0705	C3RHCLOPK1	C3RHCLOMFK1		8.00	8.00	6.00	6.75	4.88	9.00	1
C3R1086HCLO	14R0707	C3RHCLOPK1	C3RHCLOMFK1		10.00	8.00	6.00	6.75	6.88	11.00	1
C3R12106HCLO	14R0909	C3RHCLOPK1	C3RHCLOMFK1		12.00	10.00	6.00	8.75	8.88	13.00	1
C3R12126HCLO	14R1109	C3RHCLOPK1	C3RHCLOMFK1		12.00	12.00	6.00	10.75	8.88	13.00	1
C3R16126HCLO	14R1311	C3RHCLOPK1	C3RHCLOMFK1		16.00	12.00	6.00	12.75	10.88	17.00	1
C3R16166HCLO	18P1313	C3RHCLOPK2	C3RHCLOMFK2		16.00	16.00	6.00	13.00	13.00	17.00	1
C3R20166HCLO	18P1713	C3RHCLOPK2	C3RHCLOMFK2		20.00	16.00	6.00	17.00	13.00	21.00	2
C3R20208HCLO	18P1717	C3RHCLOPK2	C3RHCLOMFK2		20.00	20.00	8.00	17.00	17.00	21.00	2
C3R24208HCLO	18P2117	C3RHCLOPK2	C3RHCLOMFK2		24.00	20.00	8.00	21.00	17.00	25.00	2
C3R24248HCLO	18P2121	C3RHCLOPK2	C3RHCLOMFK2		24.00	24.00	8.00	21.00	21.00	25.00	2
C3R30248HCLO	18P2721	C3RHCLOPK2	C3RHCLOMFK2		30.00	24.00	8.00	27.00	21.00	31.00	3

