



SERIES: MD-XXJ | **DESCRIPTION:** MINI DIN CONNECTOR


FEATURES

- recessed face
- includes strain relief





PART NUMBER KEY




SPECIFICATIONS


parameter	conditions/description	min	typ	max	units
rated input voltage			100 12		Vac Vdc
rated input current	at 100 Vac at 12 Vdc			1 2	A A
contact resistance				30	mΩ
insulation resistance	at 250 Vdc	50			МΩ
voltage withstand	for 1 minute			250	Vac
insertion force				4.5	kg
withdrawl force		0.9		3	kg
operating temperature		-20		105	°C
life			5,000		cycles


MECHANICAL DRAWINGS






	MATERIAL	PLATING
shell	copper	nickel
pin contacts (1~9)	brass	silver
insulator	Nylon6+glass fiber	
boot	PE + 2L	
hood hood (MD-90J)	HIPS (PH-88) ABS (PA-757)	







MD-30J



MD-40J



MD-50J



MD-60J




MD-70J




MD-80J



MD-90J

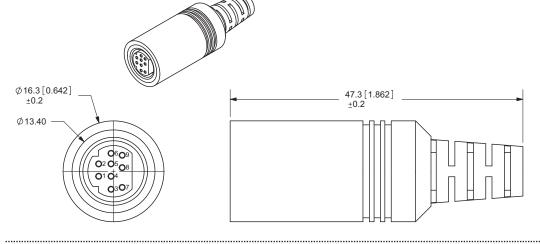



CUI Inc | SERIES: MD-XXJ | DESCRIPTION: MINI DIN CONNECTOR

REVISION HISTORY

rev.	description	date	
1.0	initial release	02/23/2006	
1.01	new template applied	02/17/2012	

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters 20050 SW 112th Ave. Tualatin, OR 97062 **800.275.4899**

Fax 503.612.2383 **cui**.com techsupport@cui.com

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.