


Bridge Rectifiers

VJ248M – VJ1048M

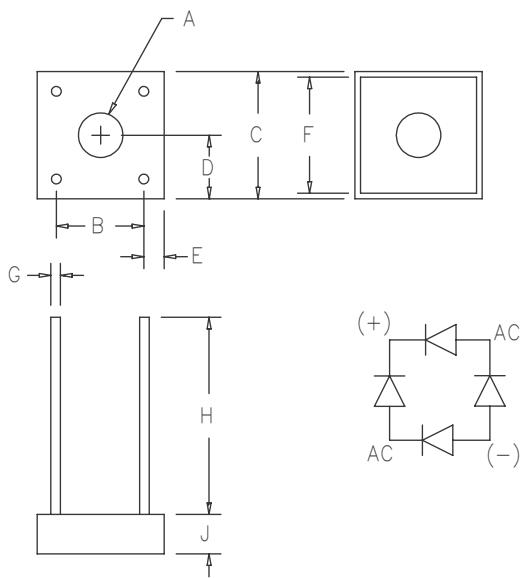

Dim.	Inches		Millimeter			Notes
	Minimum	Maximum	Minimum	Maximum		
A	.137	.167	3.84	2.21		Dia.
B	.411	.441	10.44	11.20		
C	.600	.620	---	---		
D	.295	.310	---	---		
E	.076	.096	---	---		
F	.545	.555	13.85	14.10		
G	.076	.096	.970	1.07		
H		1.0 Min.		25.40 Min.		
J	.195	.215	4.95	5.46		

Microsemi
Catalog Number

VJ248M
VJ448M
VJ648M
VJ848M
VJ1048M

Peak Reverse
Voltage

200V
400V
600V
800V
1000V

- 10 Amps DC Output
- 100 Amp Surge Current
- $\sqrt{V_{RRM}}$ to 1000V
- 2000V Isolation
- Glass Passivated Die
- ROHS Compliant

Electrical Characteristics

DC current output
Maximum surge current
Max. I^2t for fusing
Max. peak forward voltage per leg
Max. peak reverse current per leg

I_o 10 Amps
 I_{FSM} 100 Amps
 I^2t 41 A²s
 V_{FM} 1.3 Volts
 I_{RM} 5 μ A

$T_C = 95^\circ\text{C}$
8.3ms, half sine
 $I_{FM} = 1.0\text{A}; T_J = 25^\circ\text{C}^*$
 $\sqrt{V_{RRM,TJ}} = 25^\circ\text{C}$

*Pulse test: Pulse width 300 μ sec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temperature range	T_{STG}	-55°C to 175°C
Operating junction temp range	T_J	-55°C to 175°C
Maximum thermal resistance	$R_{\theta JC}$	3°C/W Junction to case
Mounting torque		12–15 inch pounds (#6 screw)
Weight		.14 ounces (4.5 grams) typical

VJ248M – VJ1048M

Figure 1
Typical Forward Characteristics – Per Leg

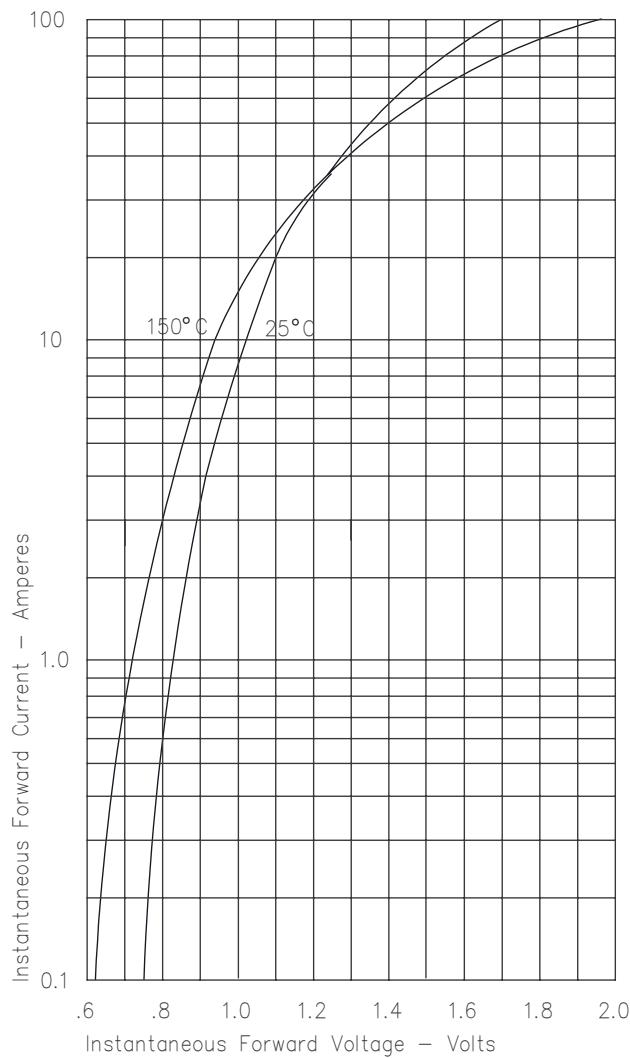


Figure 3
Forward Current Derating – Per Leg

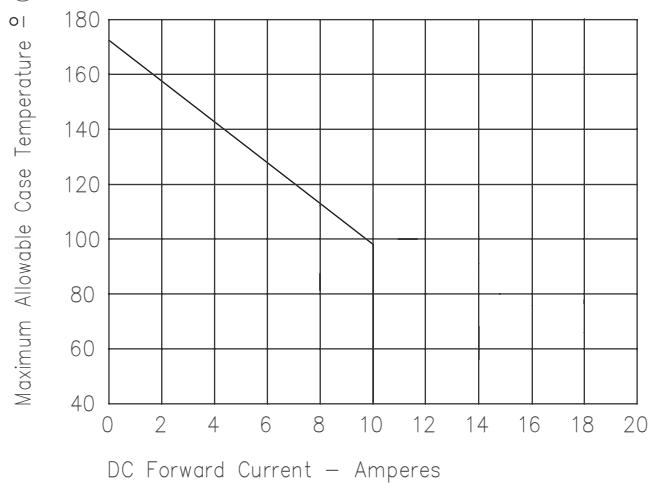


Figure 2
Typical Reverse Characteristics – Per Leg

