


Schottky Powermod

FST16035 – FST16050

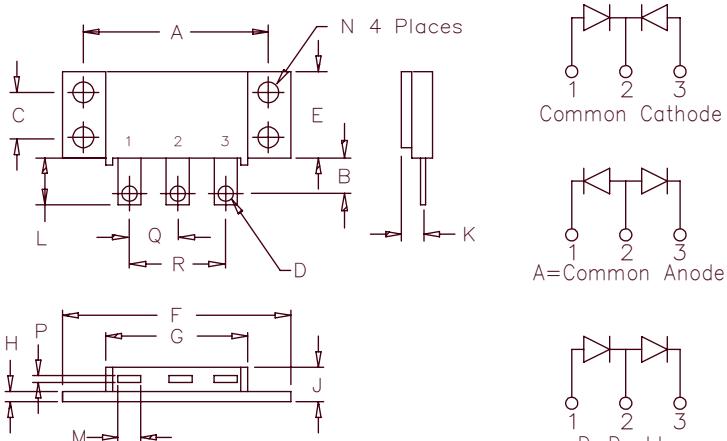

Notes:

Baseplate: Nickel plated copper;
electrically isolated

Pins: Nickel plated copper

| Dim. | | Inches | Millimeters | |
|------|-------|--------|-------------|----------------|
| Min. | Max. | Min. | Max. | Notes |
| A | 1.995 | 2.005 | 50.67 | 50.93 |
| B | 0.300 | 0.325 | 7.62 | 8.26 |
| C | 0.495 | 0.505 | 12.57 | 12.83 |
| D | 0.182 | 0.192 | 4.62 | 4.88 |
| E | 0.990 | 1.010 | 25.15 | 25.65 |
| F | 2.390 | 2.410 | 60.71 | 61.21 |
| G | 1.500 | 1.525 | 38.10 | 38.70 |
| H | 0.120 | 0.130 | 3.05 | 3.30 |
| J | --- | 0.400 | --- | 10.16 |
| K | 0.240 | 0.260 | 6.10 | 6.60 to Lead Q |
| L | 0.490 | 0.510 | 12.45 | 12.95 |
| M | 0.330 | 0.350 | 8.38 | 6.90 |
| N | 0.175 | 0.195 | 4.45 | 4.95 |
| P | 0.035 | 0.045 | 0.89 | 1.14 |
| Q | 0.445 | 0.455 | 11.30 | 11.56 |
| R | 0.890 | 0.910 | 22.61 | 23.11 |

TO-249

| Microsemi Catalog Number | Working Reverse Voltage | Peak Reverse Voltage |
|--------------------------|-------------------------|----------------------|
| FST16035* | 35V | 35V |
| FST16040* | 40V | 40V |
| FST16045* | 45V | 45V |
| FST16050* | 50V | 50V |

*Add the Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring for Reverse Protection
- $\sqrt{V_{RRM}}$ – 35 to 50 Volts
- High Surge Capacity
- Reverse Energy Tested
- ROHS Compliant

Electrical Characteristics

| | |
|---|---------------------|
| Average forward current per pkg | $I_F(AV)$ 160 Amps |
| Average forward current per leg | $I_F(AV)$ 80 Amps |
| Maximum surge current per leg | I_{FSM} 1200 Amps |
| Max repetitive peak reverse current per leg | $I_{R(OV)}$ 2 Amps |
| Max peak forward voltage per leg | V_{FM} .58 Volts |
| Max peak forward voltage per leg | V_{FM} .74 Volts |
| Max peak reverse current per leg | I_{RM} 30 mA |
| Max peak reverse current per leg | I_{RM} 2 mA |
| Typical junction capacitance per leg | C_J 2300 pF |

| |
|---|
| $T_C = 115^\circ\text{C}$, Square wave, $R_{\theta JC} = 0.5^\circ\text{C}/\text{W}$ |
| $T_C = 115^\circ\text{C}$, Square wave, $R_{\theta JC} = 1.0^\circ\text{C}/\text{W}$ |
| 8.3 ms, half sine $T_J = 175^\circ\text{C}$ |
| $f = 1 \text{ KHz}, 25^\circ\text{C}, 1\ \mu\text{sec}$ Square wave |
| $ I_{FM} = 80\text{A}: T_J = 175^\circ\text{C}^*$ |
| $ I_{FM} = 80\text{A}: T_J = 25^\circ\text{C}^*$ |
| $V_{RRM}, T_J = 125^\circ\text{C}^*$ |
| $V_{RRM}, T_J = 25^\circ\text{C}$ |
| $V_R = 5.0\text{V}, T_J = 25^\circ\text{C}$ |

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

| | | |
|--------------------------------------|-----------------|---|
| Storage temp range | T_{STG} | -55°C to 175°C |
| Operating junction temp range | T_J | -55°C to 175°C |
| Maximum thermal resistance per leg | $R_{\theta JC}$ | $1.0^\circ\text{C}/\text{W}$ Junction to case |
| Maximum thermal resistance per pkg. | $R_{\theta JC}$ | $0.5^\circ\text{C}/\text{W}$ Junction to case |
| Typical thermal resistance (greased) | $R_{\theta CS}$ | $0.1^\circ\text{C}/\text{W}$ Case to sink |
| Mounting torque | | 15 – 20 inch pounds |
| Weight | | 2.5 ounces (71 grams) typical |

FST16035 – FST16050

Figure 1
Typical Forward Characteristics – Per Leg

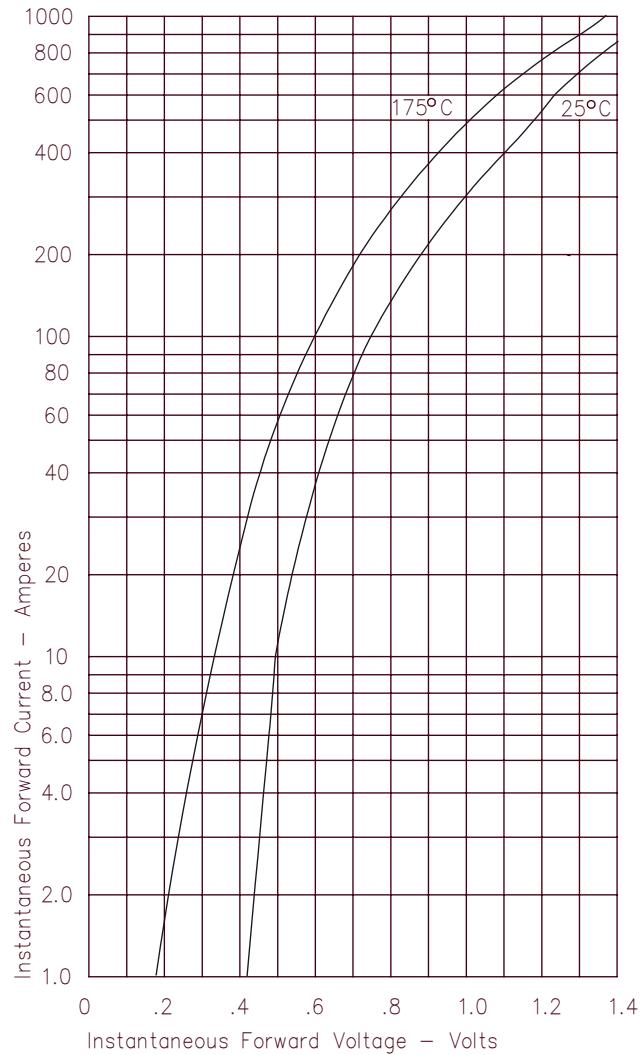


Figure 2
Typical Reverse Characteristics – Per Leg

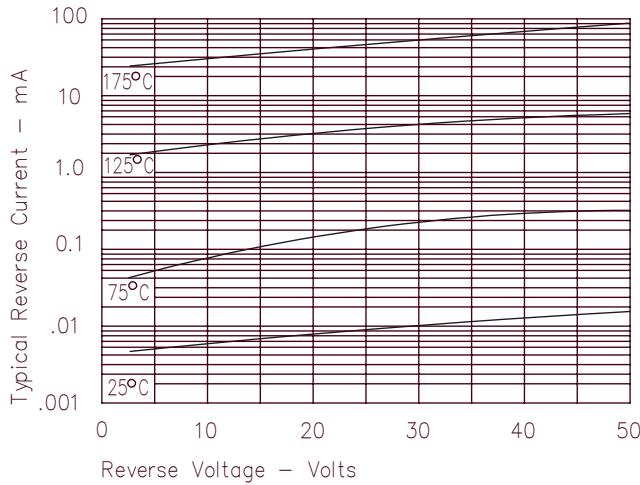


Figure 3
Typical Junction Capacitance – Per Leg

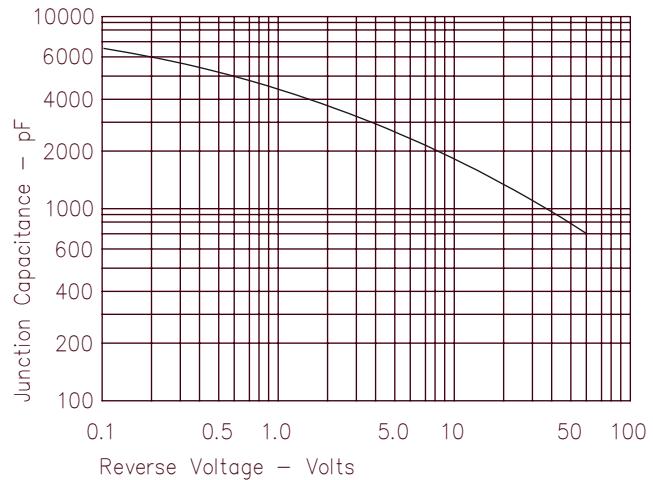


Figure 4
Forward Current Derating – Per Leg

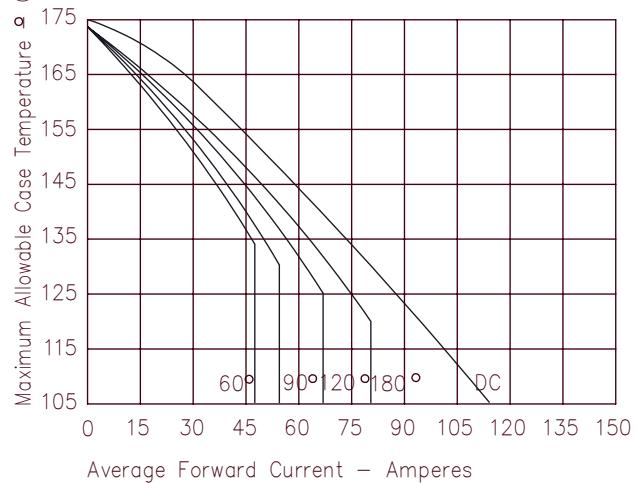


Figure 5
Maximum Forward Power Dissipation – Per Leg

