

## 611/621-Series




The miniature 611/621-Series switches are double insulated and available in single or double pole. These snap-in mounting style switches are available with paddle, rocker or Visi-Rocker type actuators. A variety of terminations are offered with ratings through 11 amps. International approvals are also available.

### Specifications

- Certifications\*: UL, CSA, VDE, TUV, SEMKO, DEMKO, SEV, NEMKO, SETI
- Dielectric Strength: 1,000V (minimum)
- Insulation Resistance: 100 Megohms (minimum)
- Base Material: Nylon
- Actuator Material: Nylon

\* Due to ongoing technological advances, consult factory for certification specifics.

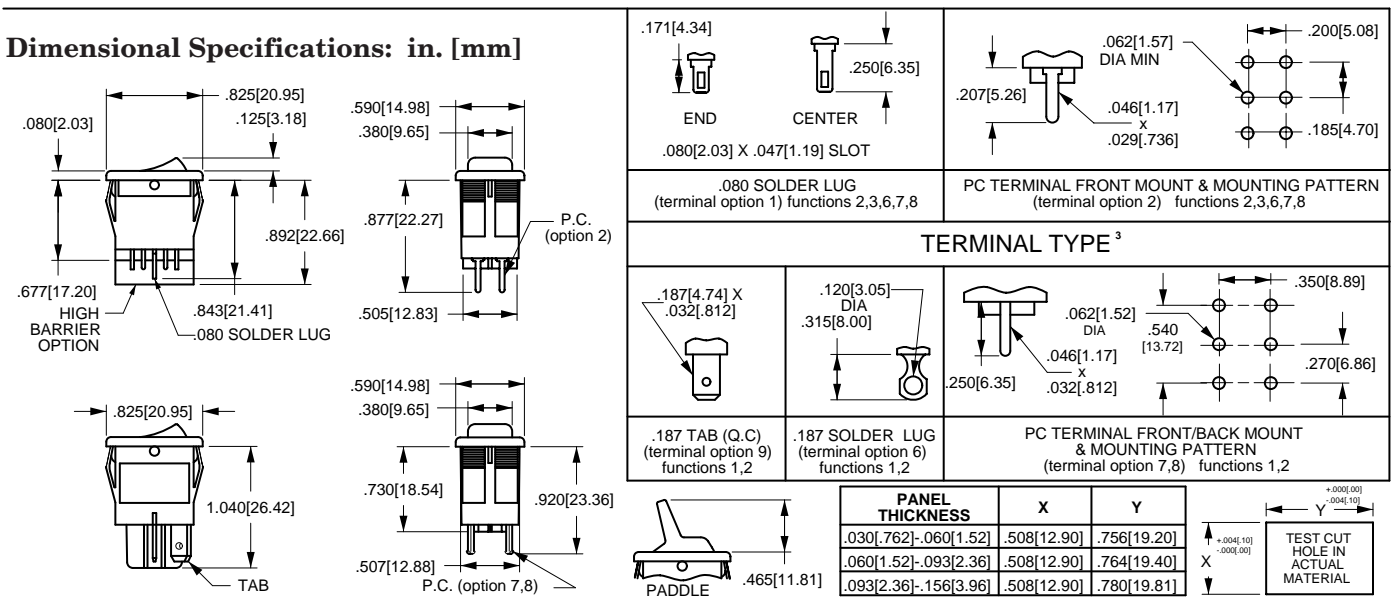

**6 21 1 5 9 1 9 - 0 - 9 - V**

<b>SERIES</b>	<b>BASE/ACTUATOR COLOR<sup>1</sup></b>	<b>RATING<sup>2</sup></b>	<b>TERMINATION<sup>4</sup></b>	<b>ROCKER FACE LEGEND</b>																																																												
6	<table border="1"> <tr> <td>BASE</td> <td>ACTUATOR</td> </tr> <tr> <td>1 BLACK</td> <td>BLACK</td> </tr> <tr> <td>2 BLACK</td> <td>WHITE</td> </tr> <tr> <td>4 WHITE</td> <td>BLACK</td> </tr> <tr> <td>5 WHITE</td> <td>WHITE</td> </tr> </table>	BASE	ACTUATOR	1 BLACK	BLACK	2 BLACK	WHITE	4 WHITE	BLACK	5 WHITE	WHITE	<table border="1"> <tr> <td>1</td> <td>.4VA MAX @20V MAX (AC/DC)</td> </tr> <tr> <td>2</td> <td>2A 250VAC</td> </tr> <tr> <td></td> <td>5A 125VAC RESISTIVE</td> </tr> <tr> <td>3</td> <td>11A 125VAC H<sup>3</sup></td> </tr> <tr> <td>4</td> <td>4A 250 VAC</td> </tr> <tr> <td></td> <td>8A 125VAC</td> </tr> <tr> <td>9</td> <td>4A 250VAC</td> </tr> <tr> <td></td> <td>8A 125VAC</td> </tr> <tr> <td></td> <td>INDUCTIVE</td> </tr> <tr> <td>6(4)</td> <td>A 250VAC T85<sup>8</sup></td> </tr> </table>	1	.4VA MAX @20V MAX (AC/DC)	2	2A 250VAC		5A 125VAC RESISTIVE	3	11A 125VAC H <sup>3</sup>	4	4A 250 VAC		8A 125VAC	9	4A 250VAC		8A 125VAC		INDUCTIVE	6(4)	A 250VAC T85 <sup>8</sup>	<table border="1"> <tr> <td>1</td> <td>.080 SOLDER LUG</td> </tr> <tr> <td>2</td> <td>PC TERM</td> </tr> <tr> <td>3</td> <td>WIRE LEAD<sup>7</sup></td> </tr> <tr> <td>4</td> <td>WIRE LEAD</td> </tr> <tr> <td>6</td> <td>.187 SOLDER LUG</td> </tr> <tr> <td>7</td> <td>PC BACK MOUNT</td> </tr> <tr> <td>8</td> <td>PC FRONT MOUNT</td> </tr> <tr> <td>9</td> <td>.187TAB (QC)</td> </tr> </table>	1	.080 SOLDER LUG	2	PC TERM	3	WIRE LEAD <sup>7</sup>	4	WIRE LEAD	6	.187 SOLDER LUG	7	PC BACK MOUNT	8	PC FRONT MOUNT	9	.187TAB (QC)	<table border="1"> <tr> <td><b>MOLDED-IN<sup>5</sup></b></td> <td><b>INK TRANSFER STAMP<sup>6</sup></b></td> </tr> <tr> <td>0 NO LEGEND</td> <td>0</td> </tr> <tr> <td>ON-OFF (VERTICAL)</td> <td>A</td> </tr> <tr> <td>ON-OFF (HORIZONTAL)</td> <td>B</td> </tr> <tr> <td>I-O (HORIZONTAL)</td> <td>D</td> </tr> <tr> <td>I-O (VERTICAL)</td> <td>E</td> </tr> <tr> <td>● (indicates ON) (ON ROCKER RADIUS)</td> <td>F</td> </tr> </table>	<b>MOLDED-IN<sup>5</sup></b>	<b>INK TRANSFER STAMP<sup>6</sup></b>	0 NO LEGEND	0	ON-OFF (VERTICAL)	A	ON-OFF (HORIZONTAL)	B	I-O (HORIZONTAL)	D	I-O (VERTICAL)	E	● (indicates ON) (ON ROCKER RADIUS)	F
BASE	ACTUATOR																																																															
1 BLACK	BLACK																																																															
2 BLACK	WHITE																																																															
4 WHITE	BLACK																																																															
5 WHITE	WHITE																																																															
1	.4VA MAX @20V MAX (AC/DC)																																																															
2	2A 250VAC																																																															
	5A 125VAC RESISTIVE																																																															
3	11A 125VAC H <sup>3</sup>																																																															
4	4A 250 VAC																																																															
	8A 125VAC																																																															
9	4A 250VAC																																																															
	8A 125VAC																																																															
	INDUCTIVE																																																															
6(4)	A 250VAC T85 <sup>8</sup>																																																															
1	.080 SOLDER LUG																																																															
2	PC TERM																																																															
3	WIRE LEAD <sup>7</sup>																																																															
4	WIRE LEAD																																																															
6	.187 SOLDER LUG																																																															
7	PC BACK MOUNT																																																															
8	PC FRONT MOUNT																																																															
9	.187TAB (QC)																																																															
<b>MOLDED-IN<sup>5</sup></b>	<b>INK TRANSFER STAMP<sup>6</sup></b>																																																															
0 NO LEGEND	0																																																															
ON-OFF (VERTICAL)	A																																																															
ON-OFF (HORIZONTAL)	B																																																															
I-O (HORIZONTAL)	D																																																															
I-O (VERTICAL)	E																																																															
● (indicates ON) (ON ROCKER RADIUS)	F																																																															
<b>ACTUATOR STYLE</b>	<b>POLES</b>	<b>FUNCTION</b>	<b>EPOXY SEALED TERMINALS</b>	<b>COLOR OF MOLDED-IN LEGEND AND/OR VISI-ROCKER END<sup>1</sup></b>																																																												
11 PADDLE 21 CURVED ROCKER	<table border="1"> <tr> <td>1</td> <td>SINGLE POLE</td> </tr> <tr> <td>2</td> <td>DOUBLE POLE</td> </tr> <tr> <td>5</td> <td>DOUBLE POLE W/ HIGH BARRIERS</td> </tr> <tr> <td>6</td> <td>SINGLE POLE W/ HIGH BARRIERS</td> </tr> </table>	1	SINGLE POLE	2	DOUBLE POLE	5	DOUBLE POLE W/ HIGH BARRIERS	6	SINGLE POLE W/ HIGH BARRIERS	<table border="1"> <tr> <td>1</td> <td>ON-NONE-OFF</td> </tr> <tr> <td>2</td> <td>ON-NONE-ON</td> </tr> <tr> <td>3</td> <td>ON-NONE-(ON)</td> </tr> <tr> <td>6</td> <td>ON-OFF-ON</td> </tr> <tr> <td>7</td> <td>ON-OFF-(ON)</td> </tr> <tr> <td>8</td> <td>(ON)-OFF-(ON)</td> </tr> </table>	1	ON-NONE-OFF	2	ON-NONE-ON	3	ON-NONE-(ON)	6	ON-OFF-ON	7	ON-OFF-(ON)	8	(ON)-OFF-(ON)	<table border="1"> <tr> <td>E</td> <td>EPOXY</td> </tr> <tr> <td>0</td> <td>NONE REQUIRED</td> </tr> </table>	E	EPOXY	0	NONE REQUIRED	<table border="1"> <tr> <td>N</td> <td>NOT APPLICABLE</td> </tr> <tr> <td>B</td> <td>BLACK</td> </tr> <tr> <td>V</td> <td>VISI-RED</td> </tr> <tr> <td>W</td> <td>WHITE</td> </tr> </table>	N	NOT APPLICABLE	B	BLACK	V	VISI-RED	W	WHITE																												
1	SINGLE POLE																																																															
2	DOUBLE POLE																																																															
5	DOUBLE POLE W/ HIGH BARRIERS																																																															
6	SINGLE POLE W/ HIGH BARRIERS																																																															
1	ON-NONE-OFF																																																															
2	ON-NONE-ON																																																															
3	ON-NONE-(ON)																																																															
6	ON-OFF-ON																																																															
7	ON-OFF-(ON)																																																															
8	(ON)-OFF-(ON)																																																															
E	EPOXY																																																															
0	NONE REQUIRED																																																															
N	NOT APPLICABLE																																																															
B	BLACK																																																															
V	VISI-RED																																																															
W	WHITE																																																															

**NOTES:**

- Shading indicates standard configurations.
- Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.
- Matte finish is standard. Custom colors are available. Consult factory.
- Rating 1 contact surfaces: gold plate over nickel plate. Rating Code 9 available with function 1 or 2 only.
- Available in single pole with high barriers, ON-NONE-OFF circuit with .187TAB terminals only.
- Terminations 1, 2 and 3 are not available with function 1. Terminations 4, 6, 7, 8 and 9 are available with function 1 or 2 only.
- Molded-in Legend available only with Visi-Rocker Option.
- White is standard with dark actuators; black is standard with light actuators.
- Termination 3 available with rating 2 only - 18 gauge wire used.
- Rating 9 using Termination 1 or 2 is rated T55 only.