

### LRGSC-Series




The LRGSC-Series Super Curvette rocker switches offer double pole circuitry in an illuminated package. These switches can handle up to 125 amp peak inrush current and can accommodate a wide range of panel cutouts due to the patented mounting ear construction. International ratings are available up to 20 amps.

#### Specifications

- Certifications\*: UL, CSA, VDE
- Dielectric Strength: 1,000 V (minimum)
- Insulation Resistance: 100 Megohms (minimum)
- Base Material: Nylon
- Actuator Material: Nylon/Polycarbonate

\* Due to ongoing technological advances, consult factory for certification specifics.

#### Dimensional Specifications: in. [mm]

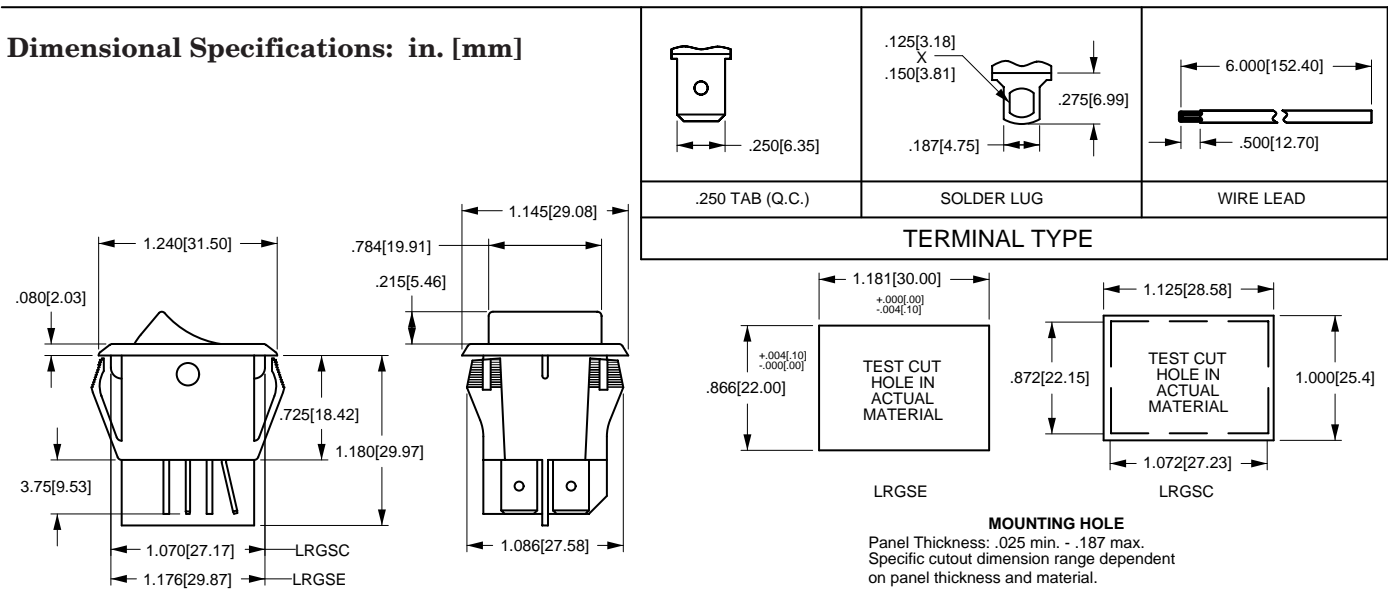

## LRGSC K 71 1 - R - S - B - 0 / 250N

SERIES	RATING <sup>1</sup>	ACTUATOR STYLE	BASE COLOR <sup>2</sup>	LAMP VOLTAGE
LRGSC STANDARD BASE	22 15A 250VAC 20A 125VAC	R TRANSLUCENT ROCKER C CLEAR ROCKER	B BLACK W WHITE	006V 6 VOLTS/ INCANDESCENT <sup>5</sup>
LRGSE EUROPEAN BASE	51 LOW VOLTAGE FOR 6, 12, 18 & 24 VOLT LAMPS		ROCKER FACE IMPRINTED LEGEND <sup>4</sup>	012V 12 VOLTS/ INCANDESCENT <sup>5</sup>
CIRCUIT	61 15A 250VAC 20A 125VAC	COLOR		018V 18 VOLTS/ INCANDESCENT <sup>5</sup>
K OFF-NONE-ON DOUBLE POLE	71 15A 250VAC 20A 125VAC 16(6)A 250VAC T85	TRANSLUCENT A APRICOT (amber) C COCONUT (white) L LIME (green) S STRAWBERRY (red) W WATERMELON (pale red)	0 NO LEGEND A OFF-ON (VERTICAL) B OFF-ON (HORIZONTAL) D O-I (HORIZONTAL) E O-I (VERTICAL) F ON-OFF (VERTICAL) G ON-OFF (HORIZONTAL)	024V 24 VOLTS/ INCANDESCENT <sup>5</sup>
	TERMINATION	CLEAR A AMBER B BLUE <sup>3</sup> C CLEAR G GREEN R RED		125N 125 VOLTS/ NEON 250N 250 VOLTS/ NEON
	0 SOLDER LUG 1 .250TAB (QC) 5 WIRE LEAD			

#### NOTES:

Shading indicates standard configurations.

Panel Cut-Out Recommendations: For sheet metal panels, switch must enter panel in same direction as the punch. (Burr on bottom.) Test cut hole in actual material.

1 Rating Code 22 must use 125V neon lamp. Rating code 71 must use 250V neon lamp.

2 Custom colors are available. Consult factory.

3 Not available with 125VAC, 250VAC neon lamp.

4 White is standard with dark actuators; black is standard with light actuators.

5 Incandescent lamps must specify rating code 51.