


### Features

- ◇ UL Recognized File # E-326243
- ◇ Plastic material used carriers Underwriters Laboratory Classification 94V-0
- ◇ Metal silicon junction, majority carrier conduction
- ◇ Low power loss, high efficiency
- ◇ High current capability, low forward voltage drop
- ◇ High surge capability
- ◇ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◇ Guard-ring for overvoltage protection
- ◇ High temperature soldering guaranteed: 260°C/10 seconds, at terminals
- ◇ Green compound with suffix "G" on packing code & prefix "G" on datecode

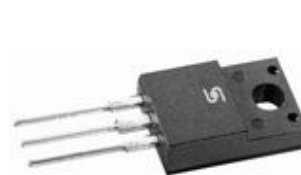

### Mechanical Data

- ◇ Case: ITO-220AB molded plastic body
- ◇ Terminals: Pure tin plated, lead free, solderable per MIL-STD-750, Method 2026
- ◇ Polarity: As marked
- ◇ Mounting position: Any
- ◇ Mounting torque: 5 in. - lbs, max
- ◇ Weight: 1.69 grams

### Ordering Information (example)

Part No.	Package	Packing	Packing code	Green Compound Packing code
MBRF3035CT	ITO-220AB	50 / TUBE	D0	D0G

### Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	MBRF 3035 CT	MBRF 3045 CT	MBRF 3050 CT	MBRF 3060 CT	MBRF 3090 CT	MBRF 30100 CT	MBRF 30150 CT	MBRF 30200 CT	Unit	
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	35	45	50	60	90	100	150	200	V	
Maximum RMS Voltage	$V_{RMS}$	24	31	35	42	63	70	105	140	V	
Maximum DC Blocking Voltage	$V_{DC}$	35	45	50	60	90	100	150	200	V	
Maximum Average Forward Rectified Current	$I_{F(AV)}$	30								A	
Peak Repetitive Forward Current (Rated VR, Square Wave, 20KHz)	$I_{FRM}$	30								A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	200								A	
Peak Repetitive Reverse Surge Current (Note 1)	$I_{RRM}$	1			0.5						A
Maximum Instantaneous Forward Voltage (Note 2) IF=15A, TA=25°C IF=15A, TA=125°C IF=30A, TA=25°C IF=30A, TA=125°C	$V_F$	0.70 0.60 0.82 0.73		0.75 0.65 0.90 0.78		0.84 0.70 0.94 0.82		0.95 0.80 1.05 0.92		V	
Maximum Reverse Current @ Rated VR TA=25 °C TA=125 °C	$I_R$	0.2								mA	
		20		15		10					
Voltage Rate of Change (Rated VR)	dV/dt	10000								V/us	
Typical Junction Capacitance	$C_j$	580		480		360				pF	
Typical Thermal Resistance Per Leg	$R_{\theta JC}$	4								°C/W	
Operating Temperature Range	$T_J$	- 65 to + 150								°C	
Storage Temperature Range	$T_{STG}$	- 65 to + 150								°C	

Note 1: 2.0uS Pulse Width, f=1.0KHz

Note 2: Pulse Test : 300uS Pulse Width, 1% Duty Cycle

RATINGS AND CHARACTERISTIC CURVES (MBRF3035CT THRU MBRF30200CT)

FIG.1 FORWARD CURRENT DERATING CURVE

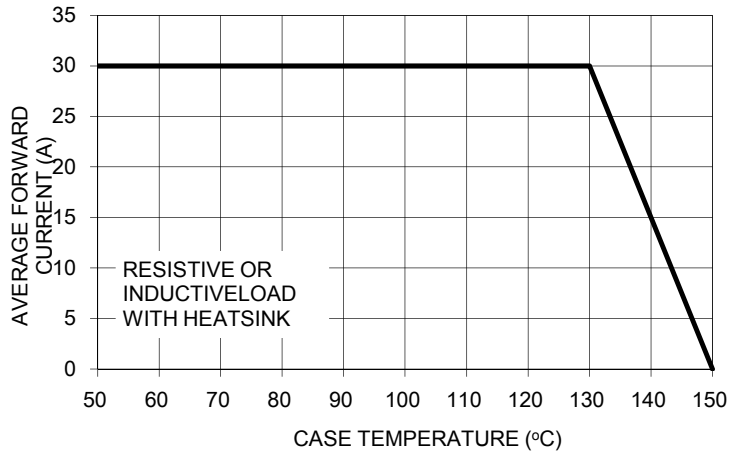


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

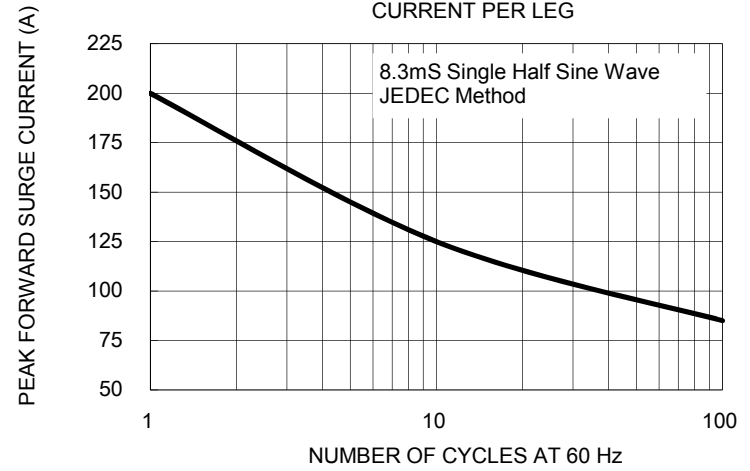


FIG. 3 TYPICAL FORWARD CHARACTERISTICS PER LEG

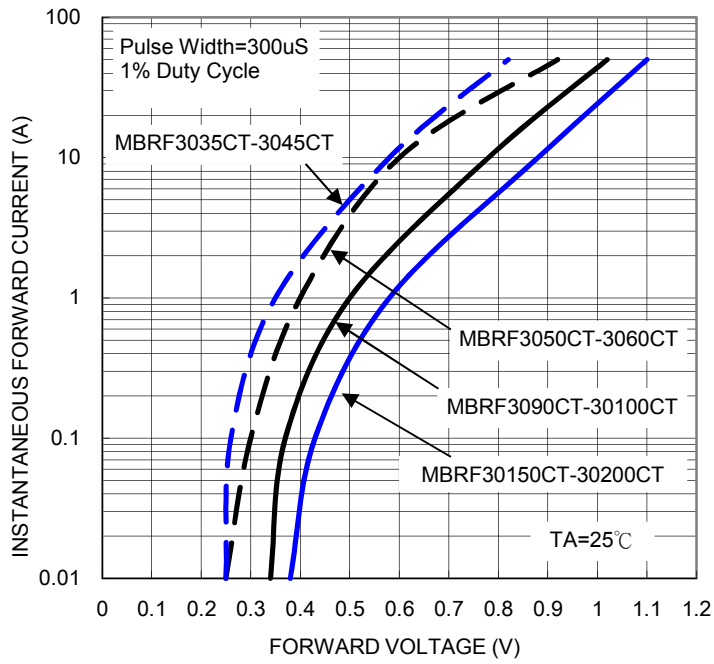


FIG. 4 TYPICAL REVERSE CHARACTERISTICS PER LEG

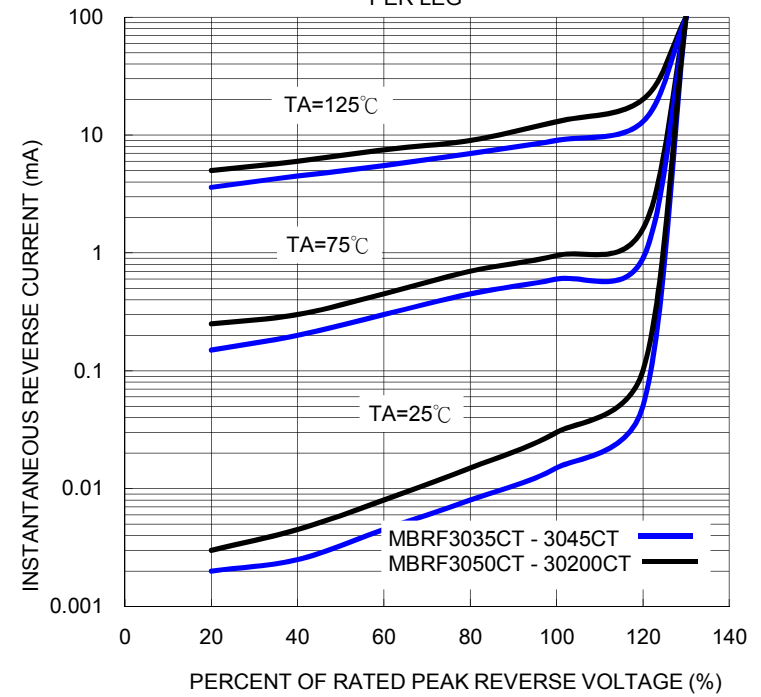


FIG. 5 TYPICAL JUNCTION CAPACITANCE PER LEG


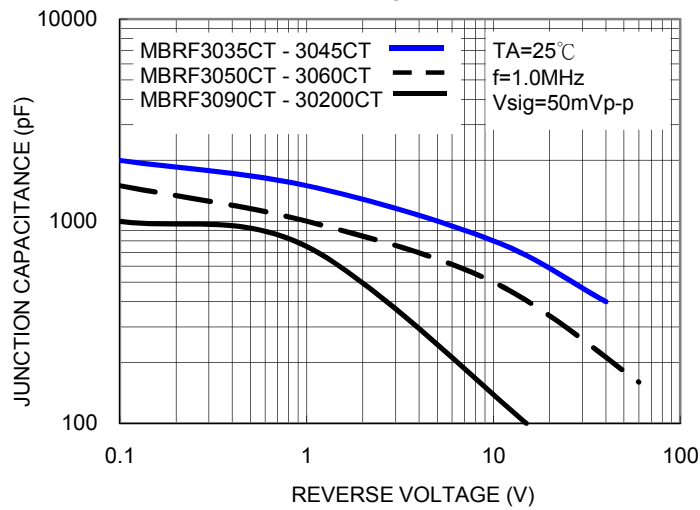



FIG. 6 TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

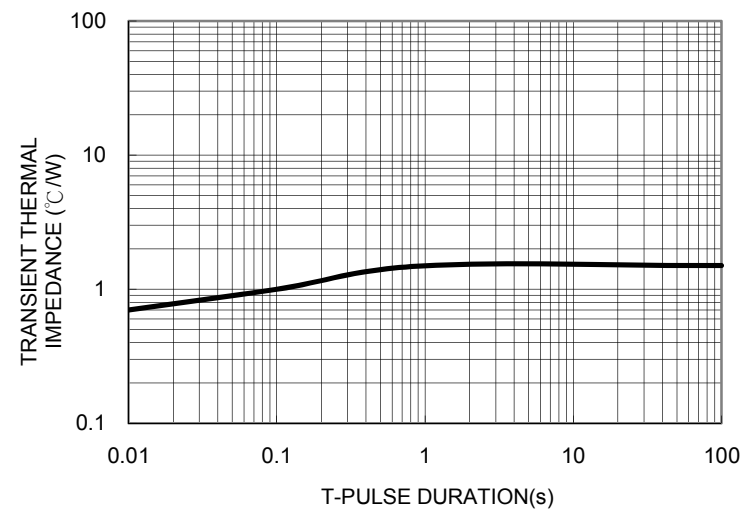


**Ordering information**

Part No.	Package	BULK Packing	Packing code	Green Compound Packing code
MBRF30xxCT	ITO-220AB	50 / TUBE	C0	C0G
	ITO-220AB	50 / TUBE	D0	D0G

Note: "xx" is Device Code from "35" thru "200".

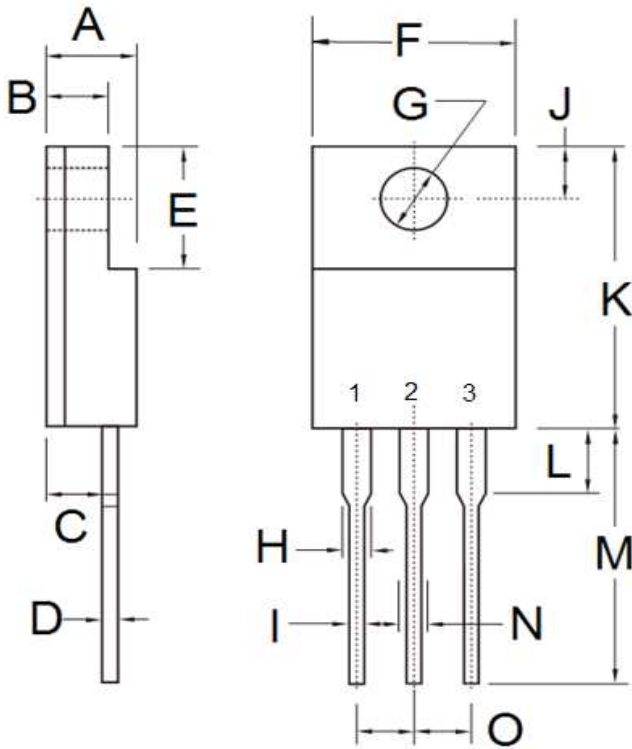**Dimensions**


DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	4.30	4.70	0.169	0.185
B	2.50	3.16	0.098	0.124
C	2.30	2.96	0.091	0.117
D	0.46	0.76	0.018	0.030
E	6.30	6.90	0.248	0.272
F	9.60	10.30	0.378	0.406
G	3.00	3.40	0.118	0.134
H	0.95	1.45	0.037	0.057
I	0.50	0.90	0.020	0.035
J	2.40	3.20	0.094	0.126
K	14.80	15.50	0.583	0.610
L	-	4.10	-	0.161
M	12.60	13.80	0.496	0.543
N	-	1.80	-	0.071
O	2.41	2.67	0.095	0.105

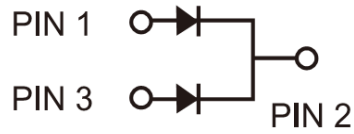
**Marking Diagram**


P/N = Specific Device Code  
 G = Green Compound  
 YWW = Date Code