




**Features**

- ✧ High efficiency, Low VF
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability
- ✧ Low power loss
- ✧ Green compound with suffix "G" on packing code & prefix "G" on datecode

**Mechanical Data**

- ✧ Cases: Molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Lead: Pure tin plated, lead free, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode
- ✧ High temperature soldering guaranteed: 260°C/10s / .375", (9.5mm) lead lengths at 5 lbs, (2.3kg) tension
- ✧ Weight: 0.40 grams

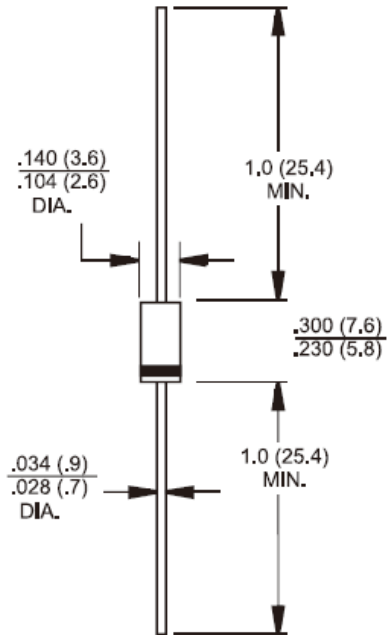

**Dimensions in inches and (millimeters)**



**Marking Diagram**

- 2A0X = Specific Device Code
- G = Green Compound
- Y = Year
- WW = Work Week

**Maximum Ratings and Electrical Characteristics**

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	2A01	2A02	2A03	2A04	2A05	2A06	2A07	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length @ $T_A=75^\circ C$	$I_{F(AV)}$	2							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	60							A
Maximum Instantaneous Forward Voltage (Note 1) @ 2 A	$V_F$	1.0							V
Maximum DC Reverse Current at @ $T_A=25^\circ C$ Rated DC Blocking Voltage @ $T_A=125^\circ C$	$I_R$	5 50							 uA
Maximum Full Load Reverse Current, Full Cycle Average .375"(9.5mm) Lead Length @ $T_A=75^\circ C$	$I_{R(AV)}$	30							uA
Typical Junction Capacitance (Note 2)	$C_j$	20							pF
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$	60							$^\circ C/W$
Operating Temperature Range	$T_J$	- 65 to + 150							$^\circ C$
Storage Temperature Range	$T_{STG}$	- 65 to + 150							$^\circ C$

Note1: Pulse Test with PW=300 usec, 1% Duty Cycle

Note2: Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.

Note3: Mount on Cu-Pad Size 10mm x 10mm on P.C.B.

## RATINGS AND CHARACTERISTIC CURVES (2A01 THRU 2A07)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

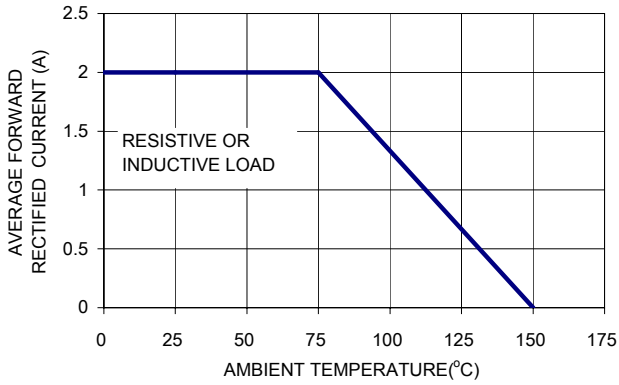


FIG. 2- TYPICAL REVERSE CHARACTERISTICS

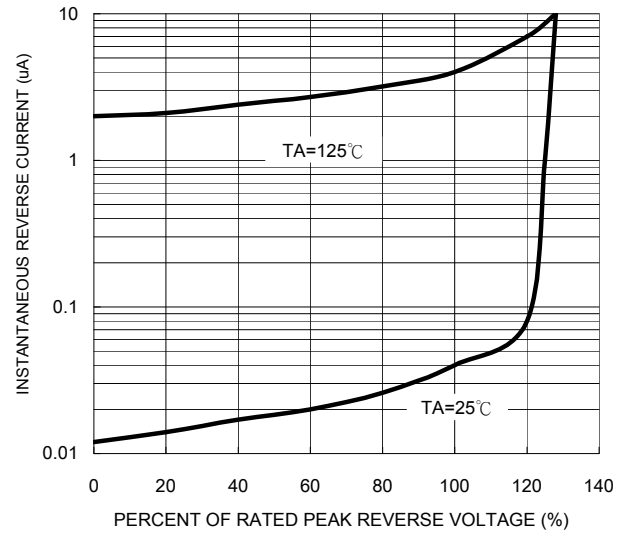


FIG. 3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

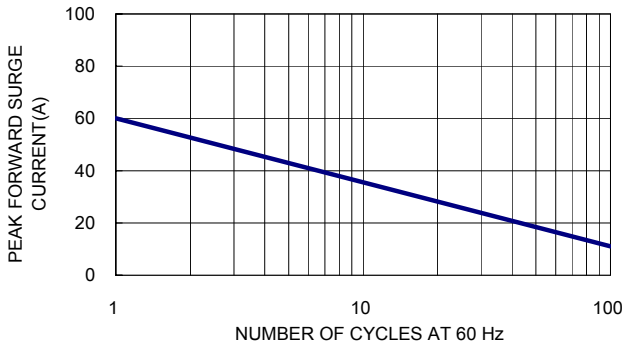


FIG. 4- TYPICAL JUNCTION CAPACITANCE

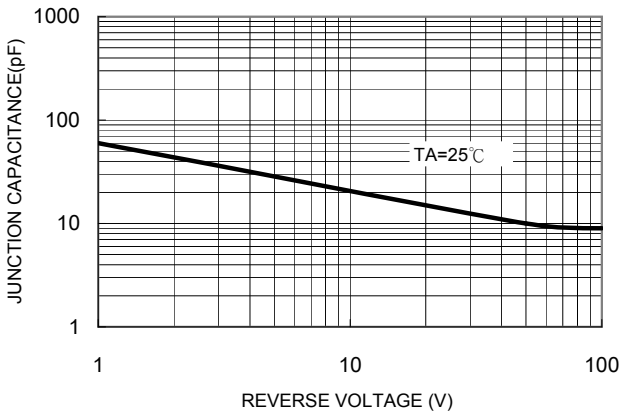


FIG. 5- TYPICAL FORWARD CHARACTERISTICS

